


dura-splice™

elevator belt fastener

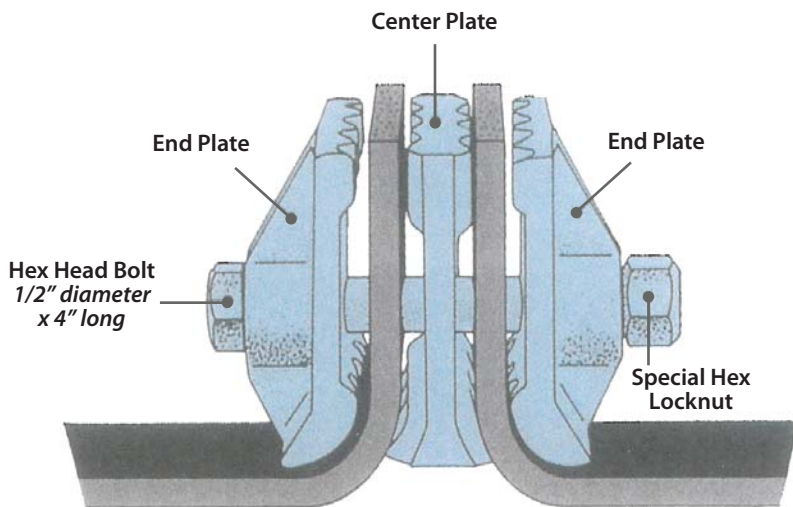

* Note: Dura-Splice™ and similar bar type splices are not recommended where a wing type boot pulley is used, as such pulleys make improper and abnormal contact with these splices. The constant encounter tends to abrade the pulley side of any belt prematurely and excessively at the splice area.

Forbo Movement Systems
Transtex Belting
10125 South Tryon Street
Charlotte, NC 28273
Toll Free: (800) 922-1735
E-Mail: transtex.us@forbo.com
www.forbo-transtex.com

Forbo Movement Systems is part of the Forbo Group,
a global leader in flooring, bonding and movement systems.

Transtex – lightweight rubber & pvc

- Dura-Splice™ is recommended for belts rated up to 800 PIW and up to 1/2" overall gauge. Dura-Splice™ operates on the same size pulley diameters as those listed for a given belt style.*
- Holds belts in a vice-like grip between *three heavy duty grooved plates designed to remain secure.*
- The joint never touches the pulleys. There is no problem of metal-to-metal contact.
- Puts an end to the double belt thickness common to other joining systems. Stops the costly waste of extra belting necessary in lap and butt strap joints.
- Offers *extra safety and increased load capacity because belts are not weakened with excess bolt holes.*
- Can be used *over and over* again for years of dependable service.
- Each splice set joins 2 inches of belt width. Recommended by grain elevator operators worldwide.



MOVEMENT SYSTEMS