









Tufted textile floor covering in tiles

Supply of a tufted textile floor covering, looped and cut, made up of 100% polyamide 6.6 fibers and dyed in the mass, in 50 x 50 cm lead tiles, type Tessera nexus.


It will combine a very good resistance to traffic (number of tuft of 226 714 /m 2 (+ 10% / - 7.5%)) and an acoustic efficiency to the noise of declared $\dot{G}Lw = 25$ dB.

Its mass tinted fibers will give it a better resistance in time.

It will be antistatic office and suitable for dissipative installation.

At the end of its life, Tessera nexus will be 100% recoverable.

It will benefit from a 10-year warranty and can be extended up to 6 additional years (depending on the conditions of use of the manufacturer's Coral or Nuway cleaning mats(1)). -

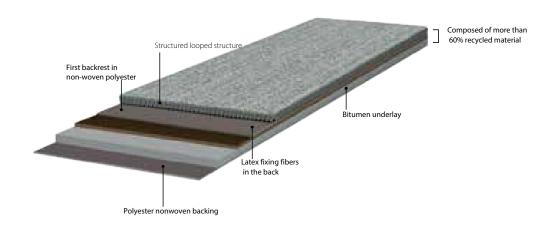

Technical specifications	
Comercial name	Tessera nexus
Total thickness	6,3 mm (± 10 %) mm
Total weight	4 305 g/m² (± 10 %)
Sound absorption	αw = 0,15 (H)
Reaction to fire	Bfl-s1* - n°25/08527T/01/18 (BTTG)

Environmental datasheet

- FDES compliant with NF P01-010 standard (to be provided)
- TVOC emission rate $< 100 \mu g/m3$, class A+ (best health labeling class)
- Meets HQE, LEED and BREEAM standards
- BRE and GUT certified
- Free of all restricted substances (formaldehyde, pentachlorophenol, heavy metals, CMR 1A and 1B); complies with European REACH regulation
- Composed of recycled materials in relation to the total weight of the product; up to 25% recycled fiber (depending on the color)
- Designed and manufactured with guaranteed 100% renewable electricity