

## PRODUCT INFORMATION



### Tufted looped textile floor covering in planks

Supply of a textile tufted floor covering made of 100% polyamide 6 fibers and mass dyed, in 50 x 50 cm leaded tiles of Tessera outline type.


It will combine a very good resistance to traffic (number of tuft of 193 060/m<sup>2</sup>) and an acoustic efficiency to the noise of shock declared  $\Delta L_w = 27$  dB.

Its mass tinted fibers will give it a better resistance in time.

It will be antistatic office and adapted for dissipative installation.

At the end of its life, Tessera outline will be 100% recoverable.

It will benefit from a 10-year warranty and can be extended up to 6 additional years (depending on the conditions of use of the manufacturer's Coral or Nuway cleaning mats).

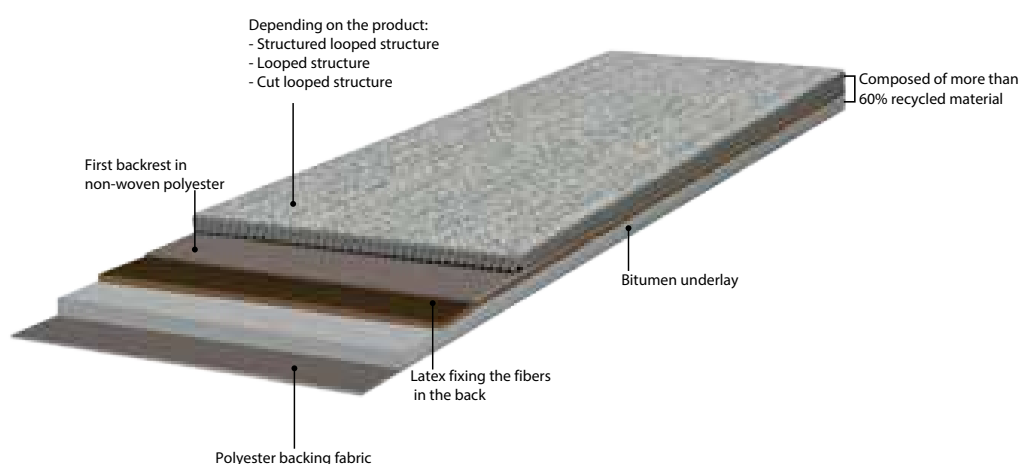

## Technical specifications

Commercial name	<b>Tessera outline</b>
Total thickness	<b>5,8 (± 10 %) mm</b>
Total weight	<b>3895 g/m<sup>2</sup></b>
Impact sound reduction	<b><math>\Delta L_w = 27</math>dB</b>
Sound absorption	<b><math>\alpha_w = 0,15</math></b>
Reaction to fire	<b>Bfl-s1* - 25/07011K/01/16 (BTTG)</b>

## Environmental datasheet

- FDES compliant with NF EN ISO 14025, NF EN 15804+A1 and its national complement NF EN 15804/CN and available on INIES.
- TVOC emission rate < 100 µg/m<sup>3</sup>, class A+ (best health labeling class).
- Product free of all restricted substances (formaldehyde, pentachlorophenol, heavy metals, CMR 1A and 1B); complies with European REACH regulation\*\*.
- GuT and BRE certified
- Designed and manufactured with guaranteed 100% renewable electricity.
- 100% PVC backing