

## PRODUCT INFORMATION



### Tufted textile floor covering in tiles

Supply of a tufted textile floor covering, curly mottled, made of 100% polyamide Aquafil and "Space dyed" fibers, in leaded tiles 50 x 50 cm, with U3 P3 E1 C0 classification, type Tessera basis.


"Space dyed", in 50 x 50 cm leaded tiles, with U3 P3 E1 C0 classification, type Tessera basis.

It will associate a very good resistance to the traffic (number of tuft of 200 940 /m<sup>2</sup> (+ 10 % / - 7,5 %)) and an acoustic efficiency in the noises of shock declared  $\Delta L_w = 22$  dB.

It will be antistatic office and suitable for dissipative installation

At the end of life, Tessera basis will be 100% recoverable.

It will benefit from a 10-year warranty and can be extended up to 6 additional years (depending on the conditions of use of the manufacturer's Coral or Nuway cleaning mats).

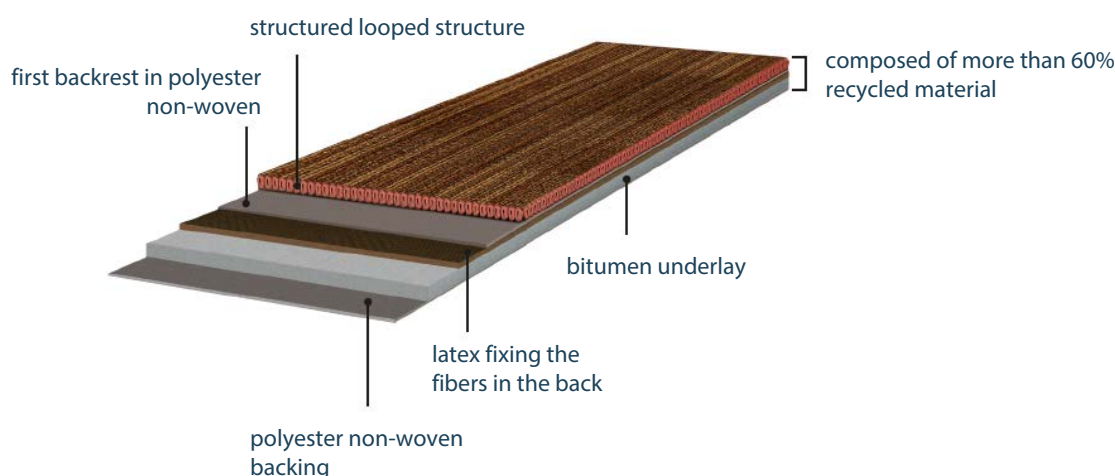

### Technical specifications

Commercial name	<b>Tessera basis</b>
Total thickness	<b>5,7 mm (± 10 %)</b>
Total weight	<b>3 835 g/m<sup>2</sup> (± 10 %)</b>
Impact sound reduction	<b><math>\Delta L_w = 22</math> dB</b>
Sound absorption	<b><math>\alpha_w = 0,15</math> (H)</b>
Reaction to fire	<b>B<sub>f1</sub>-s1* - n°25/08584R/02/18 (BTGG)</b>

### Environmental datasheet

- FDES compliant with NF EN ISO 14025, NF EN 15804+A1 and its national complement NF EN 15804/CN and available on INIES.
- TVOC emission rate < 100 µg/m<sup>3</sup>, class A+ (best class for health labeling)
- Product free of any substance subject to restriction
- (formaldehyde, pentachlorophenol, heavy metals, CMR 1A and 1B); complies with European REACH regulation
- Meets HQE, BREEAM and LEED
- BRE and GuT certified
- 63.5% recycled content by product weight
- Designed and manufactured using 100% renewable electricity