Tessera contour







PRODUCT INFORMATION



Tufted textile floor covering in tiles

Supply of a tufted textile floor covering, looped and cut, made of 100% polyamide 6.6 RefreshTM by Universal FibersTM and mass-dyed, in $50 \times 50 \times 10^{-2}$ cm leaded tiles, type Tessera contour.


It will combine very good traffic resistance (tuft number of $254,880/m^2$ (+ 10% / - 7.5%) and an acoustic efficiency to impact noise declared $\dot{G}Lw = 23$ dB. The use of curly and chopped fibers will give a unique effect.

Its mass-dyed fibers will give it a better hold over time.

It will be antistatic office and suitable for dissipative installation.

At the end of its life, Tessera contour will be 100% recoverable.

It will benefit from a 10-year warranty and can be extended up to 6 additional years (depending on the conditions of use of the Coral or Nuway mats of the manufacturer).

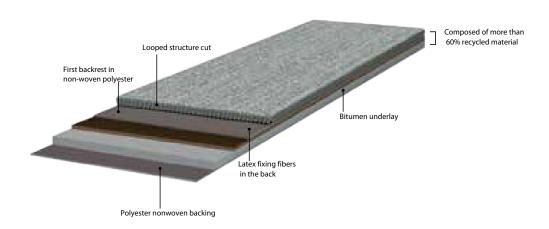

Technical specifications	
Tessera contour	
6,3 mm (± 10 %)	
4 095 g/m² (± 10 %)	
$\Delta L_{\rm w} = 23 \rm dB$	
α _w = 0,15 (H)	
B _{fl.} s1* - n° 25/08584T/02/18 (BTTG)	

Environmental datasheet

- FDES compliant with NF EN ISO 14025, NF EN 15804+A1 and its national complement NF EN 15804/CN and available on INIES.
- \bullet TVOC emission rate < 100 $\mu g/m3$, class A+ (best health labeling class)
- Meets HQE, LEED and BREEAM standards
- BRE and GUT certified
- Product free of any substance subject to restriction (formaldehyde, pentachlorophenol, heavy metals, CMR 1A and 1B); complies with European REACH regulation (2)
- More than 60% of the total weight of the product is made of recycled materials.
- Designed and manufactured with guaranteed 100% renewable electricity