

PRODUCT INFORMATION



Tufted textile floor covering in tiles


Supply of a textile tufted floor covering, looped structured made of 100% polyamide 6 fibers and mass dyed, in 50 x 50 cm leaded tiles, type Tessera inline.

It will associate a very good resistance to the traffic (number of tuft of 198 374 /m² (± 10 %)) and an acoustic effectiveness in the noises of shock declared $\Delta L_w = 25$ dB. Its mass tinted fibers will confer a better behaviour in time.

It will be antistatic office and adapted for dissipative installation.

At the end of its life, Tessera inline will be 100% recoverable.

It will benefit from a 10-year warranty and can be extended up to 6 additional years (depending on the conditions of use of the manufacturer's Coral or Nuway cleaning mats).

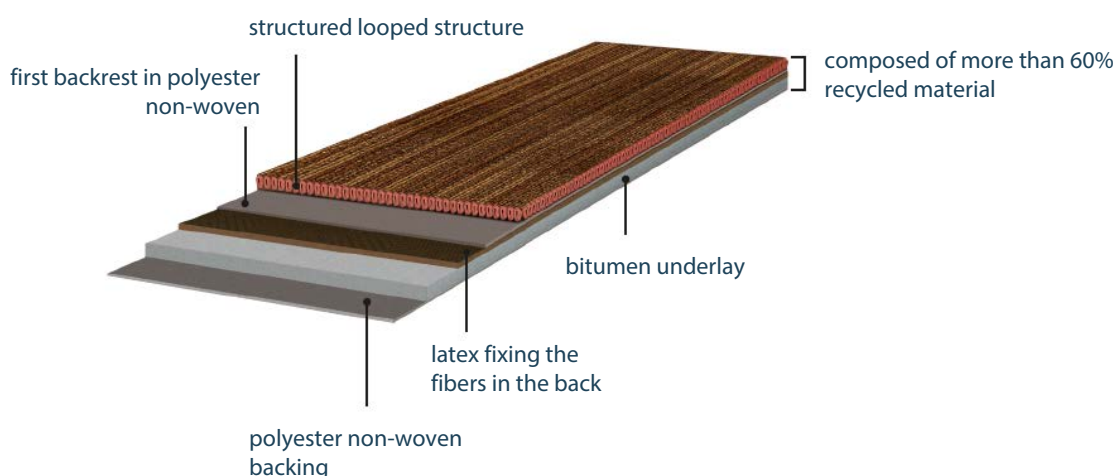

Technical specifications

Commercial name	Tessera inline
Total thickness	6,5 mm (± 10 %)
Total weight	4 120 g/m² (± 10 %)
Impact sound reduction	$\Delta L_w = 25$ dB
Sound absorption	$\alpha_w = 0,20$ (H)
Reaction to fire	B_{f1-s1}* - n°25/07051E/02/16 (BTG)

Environmental datasheet

- FDES compliant with NF EN ISO 14025, NF EN 15804+A1
- and its national complement NF EN 15804/CN and available on INIES.
- TVOC emission rate < 100 µg/m³, class A+ (best class of health labeling)
- Meets HQE, BREEAM and LEED
- GuT, BRE certified
- Free of all restricted substances (formaldehyde, pentachlorophenol, heavy metals, CMR 1A and 1B); complies with European REACH regulation (2)
- 63% recycled content by weight of the product
- Designed and manufactured with guaranteed 100% renewable electricity