

## PRODUCT INFORMATION



### Tufted textile floor covering in strips


Supply of a tufted textile floor covering, looped structured made of 100% Polyamide 6.6 Invista fibers and mass dyed, in 25 x 100 cm leaded strips type Tessera in-touch.

It combines a very good resistance to traffic (number of tuft of 217 488/m<sup>2</sup>) and an acoustic efficiency to the noises of shock  $\Delta L_w = 27$  dB. Its mass tinted fibers will give it a better resistance in time.

It will be antistatic office and adapted for dissipative installation.

At the end of its life, Tessera in-touch will be 100% recoverable.

It will benefit from a 10-year warranty and can be extended up to 6 additional years (depending on the conditions of use of the manufacturer's Coral or Nuway cleaning mats).

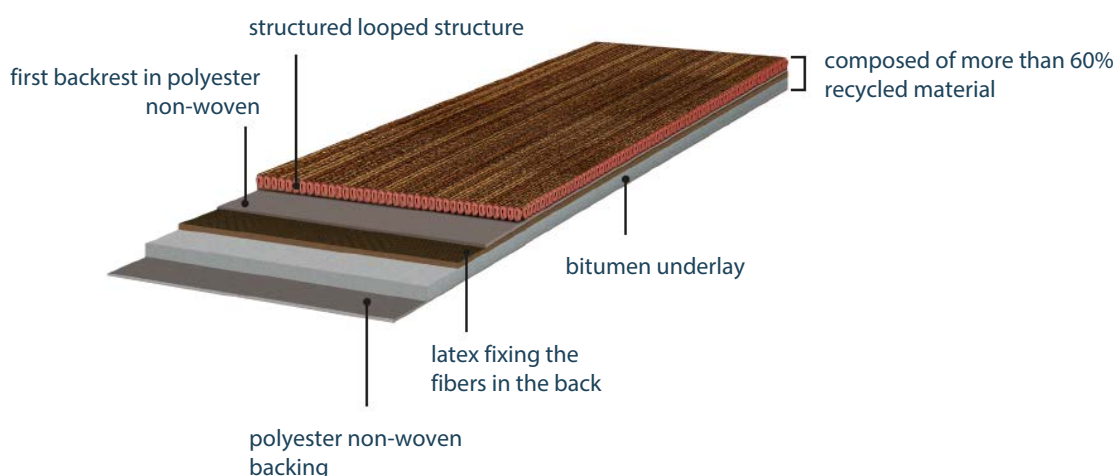

### Technical specifications

Commercial name	<b>Tessera in-touch</b>
Total thickness	<b>7,4 mm (± 10 %)</b>
Total weight	<b>4 355 g/m<sup>2</sup> (± 10 %)</b>
Impact sound reduction	<b><math>\Delta L_w = 27</math> dB</b>
Sound absorption	<b><math>\alpha_w = 0,15</math> (H)</b>
Reaction to fire	<b>B<sub>f1-s1*</sub> - n°25/07844B/02/17 (BTG)</b>

### Environmental datasheet

- FDES compliant with NF EN ISO 14025, NF EN 15804+A1 and its national complement NF EN 15804/CN and available on INIES.
- TVOC emission rate < 100 µg/m<sup>3</sup>, class A+ (best health labeling class)
- Meets HQE, LEED and BREEAM standards
- BRE certified
- Product free of any substance subject to restriction (formaldehyde, pentachlorophenol, heavy metals, CMR 1A and 1B); complies with the European REACH regulation
- Composed of recycled materials in relation to the total weight of the product; up to 25% recycled fiber (depending on the color)
- Designed and manufactured with guaranteed 100% renewable electricity