

## PRODUCT INFORMATION



### Tufted textile floor covering in tiles

Supply of a textile tufted floor covering, looped structured made of 100% polyamide 6.6 Invista Antron and "mass dyed", in 50 x 50 cm leaded tiles, type Tessera mix.


The tiles can be laid randomly to reduce installation waste and facilitate installation.

It will combine a very good resistance to traffic (number of tuft of 199 750 /m<sup>2</sup> (+ 10 %)) and an acoustic efficiency to the noises of shock declared  $\Delta L_w = 26$  dB.

It will be antistatic office and adapted for dissipative installation.

At the end of its life, Tessera mix will be 100% recoverable.

It will benefit from a 7-year warranty and can be extended up to 6 additional years (depending on the conditions of use of the manufacturer's Coral or Nuway cleaning mats).

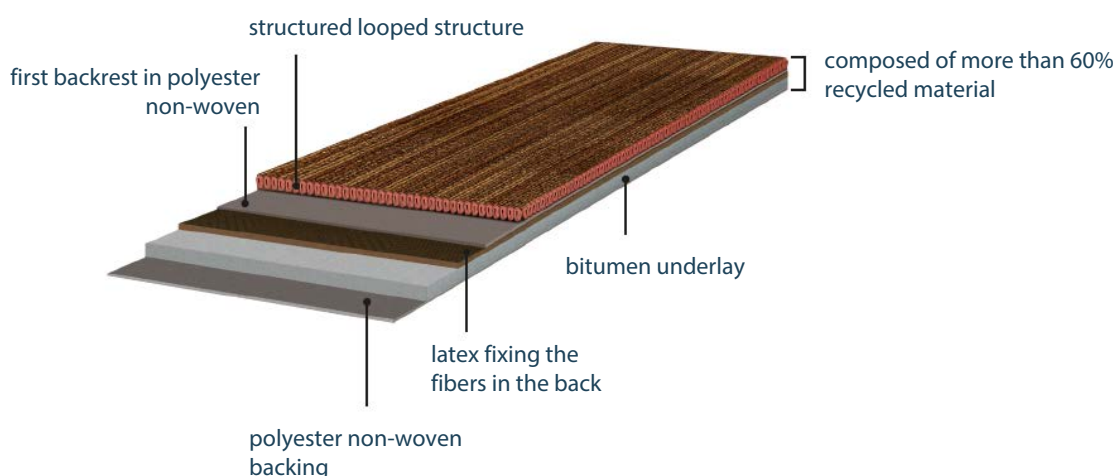

### Technical specifications

Commercial name	<b>Tessera mix</b>
Total thickness	<b>6,5 mm (± 10 %)</b>
Total weight	<b>4 155 g/m<sup>2</sup> (± 10 %)</b>
Impact sound reduction	<b><math>\Delta L_w = 26</math> dB</b>
Sound absorption	<b><math>\alpha_w = 0,15</math> (H)</b>
Reaction to fire	<b>B<sub>f1-s1</sub>* n°25/08584V/02/18 (BTTG)</b>

### Environmental datasheet

- FDES compliant with NF EN ISO 14025, NF EN 15804+A1
- and its national complement NF EN 15804/CN and can be consulted on INIES.
- TVOC emission rate < 100 µg/m<sup>3</sup>, class A+ (best health labeling class)
- Meets HQE, LEED and BREEAM standards
- BRE and GUT certified
- Free of all restricted substances (formaldehyde, pentachlorophenol, heavy metals, CMR 1A and 1B); complies with European REACH regulation
- More than 61.5% of the total weight of the product is made of recycled materials.
- Designed and manufactured with guaranteed 100% renewable electricity