

PRODUCT INFORMATION



Tufted textile floor covering in planks


Supply of a tufted textile floor covering, looped and structured, made of 100% Polyamide fibres 6.6 Antron lumena and dyed mass, in planks 20 x 100 cm type Tessera seagrass.

It combines a very good resistance to traffic (number of tuft of 212 760/m²) and an acoustic efficiency to the noises of shock $\Delta L_w = 28$ dB. Its mass tinted fibers will give it a better resistance in time.

It will be antistatic office and adapted for dissipative installation.

At the end of its life, Tessera seagrass will be 100% recoverable.

It will benefit from a 10-year warranty and can be extended up to 6 additional years (depending on the conditions of use of the manufacturer's Coral or Nuway cleaning mats

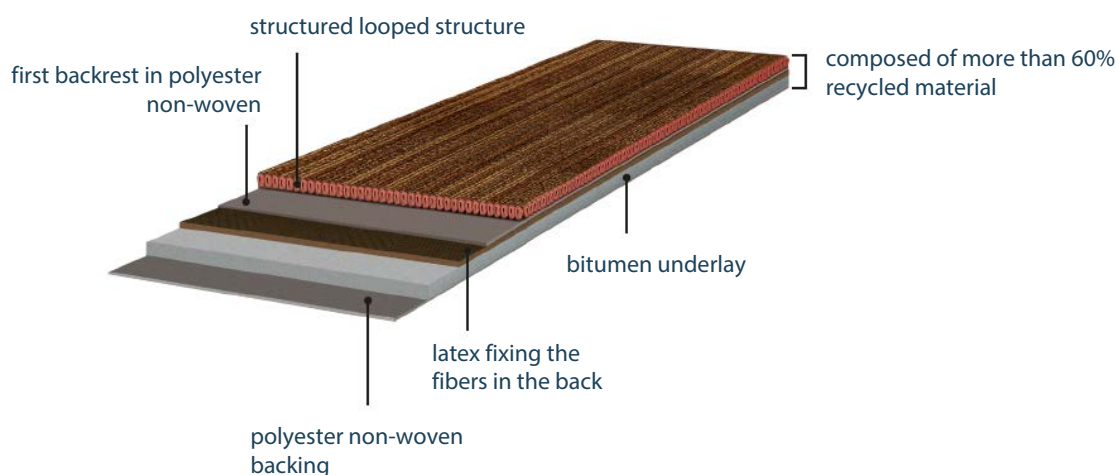

Technical specifications

| | |
|------------------------|--|
| Commercial name | Tessera seagrass |
| Total thickness | 6,6 mm (± 10 %) |
| Total weight | 4 267 g/m² (± 10 %) |
| Impact sound reduction | $\Delta L_w = 28$ dB |
| Sound absorption | $\alpha_w = 0,15$ (H) |
| Reaction to fire | B_{f1-s1}* - n°25/07079G/02/16 (BTTG) |

Environmental datasheet

- FDES compliant with NF EN ISO 14025, NF EN 15804+A1 and its national complement NF EN 15804/CN and available on INIES.
- TVOC emission rate < 100 µg/m³, class A+ (best health labeling class)
- Meets HQE, LEED and BREEAM standards
- BRE certified
- Product free of any substance subject to restriction (formaldehyde, pentachlorophenol, heavy metals, CMR 1A and 1B); compliant with European REACH regulation
- Composed of recycled materials in relation to the total weight of the product; up to 25% recycled fiber (depending on the color)
- Designed and manufactured with guaranteed 100% renewable electricity