

VENTILATED SKIRTING FOR MODUL'UP TE

Description

PVC profile

For use as a ventilated skirting with Modul'up TE to allow evaporation of subfloor moisture. A two-part system applied after the floorcovering is fitted.



Technical data

VENTILATED SKIRTING FOR DAMP SUBFLOOR from FORBO FLOORING SYSTEMS	
Height	60 mm
Skirting thickness	9 mm (max 18mm on lips)
Length	2 m
Packaging	20 lengths (total in box 40 lm)


Installation instruction

Installation instructions:

See the drawing below. The base can be glued or screwed on to the wall. The ventilated skirting profile clips onto the base ensuring it is on top of the floor surface.

Note: there must be a continuous 5mm gap between the flooring and the wall to allow moisture to escape.

Colors references

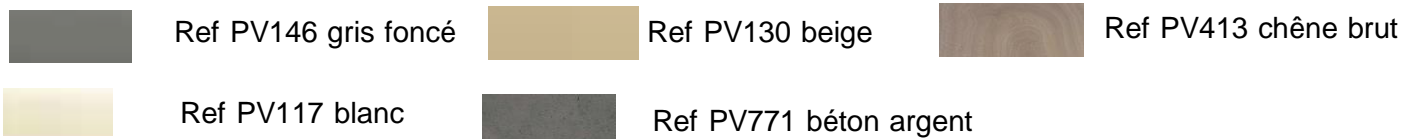

Technical drawing

