#### **Blakemore David**

Subject:

FW: Copy of Technichal Bullitin Cove Ezi



August 2011


# TECNICAL BULLETIN

### Australian Made Cove - Ezi

## **Pre-Formed Marmoleum Coving**

Cove - Ezi is manufactured Marmoleum pre-formed coving which has an integrated profile support backing.

### Cove - Ezi comes with Forbo Warranty.

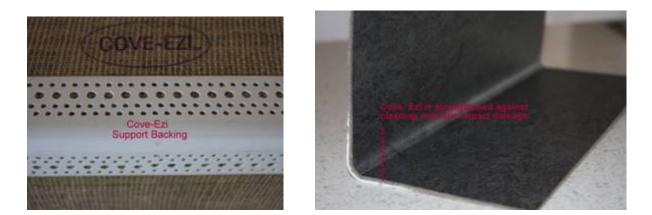


### The benefits of Cove - Ezi

- 1. Cove Ezi offers ease of installation, speed, cost effectiveness and the opportunity for the designer to use a coloured boarder offset to that of the field colour. A contrasting coloured welding rod can then be used as a design feature around the perimeter of the installation.
- 2. Cove -Ezi can be manufactured to order in various cove heights and base widths in 2.40 Lm lengths
- 3. Cove Ezi can be manufactured to accommodate separate internal and external corners
- 4. Cove Ezi can be manufactured to order in the complete Marmoleum colour range
- 5. Cove Ezi is cleaning machine bump resistant, avoiding mechanical damage
- 6. Cove Ezi is stair riser toe kick resistant, avoiding mechanical damage

7. Cove - Ezi has a 10 mm cove base radius which gives it strength and uniform neatness against door jambs and other internal and external protrusions.

Note: Cove - Ezi has minimum order requirements for varying cove heights and base widths.

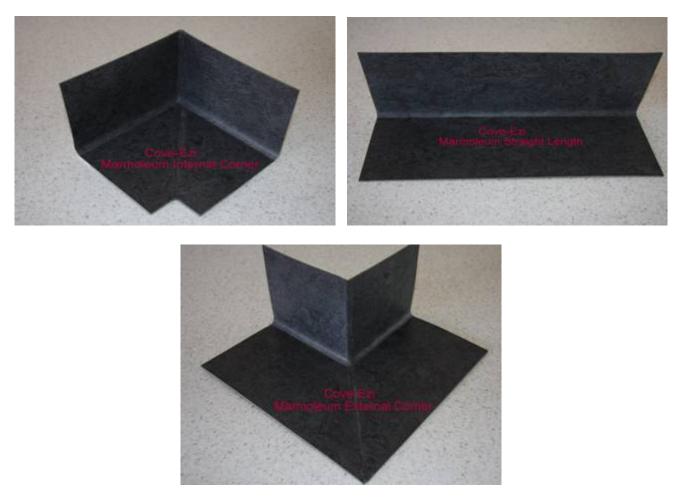

### **Cove - Ezi Installation**

- 1. Cove Ezi should be unpacked and acclimatized at 18 degrees C as per AS 1884-1985 recommendations.
- 2. Cove Ezi lengths should layed out with the jute side and support backing facing upwards in the form of tents.
- 3. Cove Ezi can be stacked in multiple lengths one on top of the other, in this way it will help to elevate some tension brought about by the packaging, storage and freighting process.
- 4. Cove Ezi can be installed **using high solid contact adhesives**, sprayed, rolled or painted on. In most cases **two coats of adhesive should be applied** to the cove backing to achieve a thick adhesive build up. Low solid skirting contact adhesive should not be used as some adhesive solids will be lost / absorbed into the Marmoleum back and have an inferior adhesive build up.
- 5. Cove Ezi can also be installed using Forbo Fix 414 adhesive, brushed, rolled or trowelled on with a 2.4 x 2.4 mm "V" notch trowel. Please test a small area of coving to familiarize yourself when using Forbo Fix 414 adhesive process.

Should you have any questions please contact Forbo Technical Services on 0439 063 336.