

UNDERLAYER ACCESSORIES

Underlayer


► IMPORTANT

Sarlibase TE

Reinforced PVC compact underlay. For subfloors with humidity (DTU 53.12 requirements) and old subfloors (tiles, wood, asbestos- covered or not). Looselaid system with 3 to 5 mm perimeter clearance, studs on the subfloor and staggered joints with the floorcovering. The floorcovering is adhered to the underlayment as described in the Avis Technique. When used on subfloors with humidity, the underlayment allows moisture-laden air to circulate under the system (underlayment + covering). System under Avis Technique.

Length 35 m – Width 2 m – Thickness 1,5 mm

Ref.:TE13

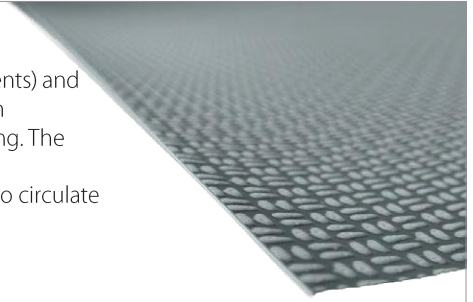

Sarlibase Lisse

Compact, reinforced PVC underlay. For old substrates (tiles, wood, asbestos-covered or not). Floating installation on substrate. Allows flexible flooring to be laid without direct bonding to the substrate. Installation with sharp joints staggered with the joints on the floorcovering.

Length 35 m - Width 2 m - Thickness 1,1 mm

Ref.:TELIS




Sarlibase Acoustic

Reinforced PVC foam underlay. Acoustic attenuation $\Delta L_w = 18$ dB. For dry substrates. Provides sound attenuation associated with a specific type of flexible flooring. Full-surface bonding to the substrate using acrylic adhesive.

Length 35 m - Width 2 m - Thickness 2 mm

Ref.:TEAC

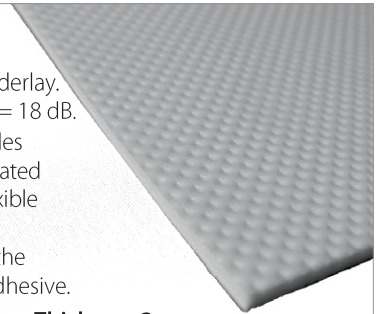

Allura click pro / life 15 dB underlayer

The Underlay Allura click 15 dB was designed specifically to be laid floating under Allura Click Compact flooring. As a high-quality system for reducing impact sound and walking noise, this underlay was developed to protect interlocking devices of different flooring systems and is supplied in rolls for convenience. It can be installed on the old subfloor. This underlay will be installed, preferably perpendicularly of the allura click row installation with the bright part visible. N.B: The underlay 15 dB is ready to use without protective film to remove.

Length 10 m - Width 1 m - Thickness 1,5 mm

Ref.: U54002

Forbo Foam

Polypropylene foam laminated with metallized polypropylene foil (vapor barrier). Easy installation with integrated self-adhesive strips for joining the underlayment strips. Permeability of water vapor less than $0.46 \text{ g/m}^2/24\text{h}$. Impact noise insulation. Can be associated with Quick Fit and Marmoleum click.

Length 25 m - Width 1 m - Thickness 4,5 mm

Ref.:6666



Quick Fit

MDF panels. Installed with 2 layers of self-adhesive panels. 3 mm thickness, adhesive side up. 4 mm thickness, adhesive side down. Can be used for floating installation over an old subfloor (under certain conditions), especially for temporary installation. Must be finished with a flexible floorcovering.

10 panels of 120 cm x 60 cm (namely $3,6 \text{ m}^2/\text{box}$)

Ref.: 4444



PROTECTION ACCESSORIES

Skirtings

► RECOMMENDED

Ventilated skirting

PVC skirting. It can be used with a system combining Sarlibase TE and compatible floorcovering, as well as with Modul'up TE system. Installation takes place after the floorcovering has been installed. The base* of the ventilated skirting can be glued or screwed to the wall before the ventilated skirting is installed. To ensure perfect adhesion, we recommend using a rubber tile hammer to avoid breaking the skirting.

It is also possible to assemble the base and body of the skirting together to install it as a single piece on the wall, using mounting adhesive type 882 Eurobond high tack.

Box of 20 lengths of 2 m namely 40 m/box



146PV
Gris foncé



130PV
Beige



117PV
Blanc



413PV
Chêne brut



771PV
Béton argent

Floorcovering protection

► RECOMMENDED

ProtectT & ProtecV


ProtectT (in textile) and ProtecV (in PVC) protection are non-compliant floorcovering to be used as a floorcovering.

This product must be used only as floor protection.

Must be looselaid on the floorcovering installed, this floor protection will protect the new floorcovering against scratches and possible deterioration on site life before delivery on the project.

ProtectT and ProtecV are re-usable.

ProtectT et ProtecV : order by m²

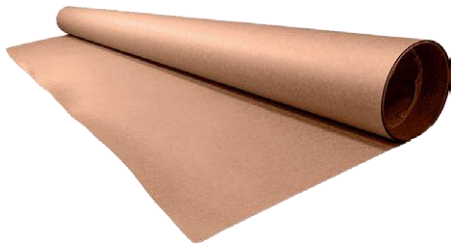

Protection paper

Protection kraft paper that can be loosely applied to newly installed flooring to protect it from scratches and damage before delivery.

Sheet of 75 m² (sheet width in 120 cm or 140 cm depending on the availability : total surface will be 75 m² in both cases)

Ref. : 344

Maintenance

► RECOMMENDED

888 Euroclean uni

Neutral detergent cleaner for daily and occasional maintenance on all types of factory-protected floorcoverings. Effectively removes stubborn dirt. Dries streak-free without buffing.

Technical characteristics:

pH = 7 (neutral)

Consumption : 40 to 100 ml diluted in 8 Liters of water

Drying time : 30 min minimum

Bucket of 5 Liters

Ref. : 888



891 Euroclean basic

Water-based alkaline detergent cleaner for periodic maintenance or restoration, to be used with a red pad. Not for use in scrubber-dryers. Universal basic cleaner, also suitable for linoleum.

Technical characteristics:

pH = 9.5 (alkaline)

Consumption : dilution 1:5 or 1:3 depending on dirtiness

Action time : 10 min minimum

Bucket of 10 Liters

Ref. : 891

