



FLOORING SYSTEMS

Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

This declaration is an environmental product declaration in accordance with ISO 14025. This EPD does not guarantee that any performance benchmarks, including environmental performance benchmarks, are met. EPDs are intended to compliment Type I environmental performance labels. EPDs provide LCA-based information and additional information on the environmental aspects of products and assist purchasers and users to make informed comparisons between products. EPDs are not comparative assertions. EPDs encourage improvement of environmental performance and provide information for assessing the environmental impacts of products over their life cycle. EPDs not based on an LCA covering all life cycle stages, or based on a different PCR, are examples of declarations that have limited comparability. EPDs from different programs may not be comparable.



PROGRAM OPERATOR	UL Environment 333 Pfingsten Road Northbrook, IL 60611
DECLARATION HOLDER	Forbo Flooring B.V. Industrieweg 12 P.O. Box 13 NL-1560 AA Krommenie
DECLARATION NUMBER	12CA64879.118.1
DECLARED PRODUCT	Novilon Viva
REFERENCE PCR	Flooring: Carpet, Resilient, Laminate, Ceramic, and Wood (NSF 2012)
DATE OF ISSUE	27 September 2013
PERIOD OF VALIDITY	5 Years
CONTENTS OF THE DECLARATION	Product definition and information about building physics Information about basic material and the material's origin Description of the product's manufacture Indication of product processing Information about the in-use conditions Life cycle assessment results Testing results and verifications
The PCR review was conducted by:	NSF International Accepted by PCR Review Panel ncss@nsf.org
This declaration was independently verified in accordance with ISO 14025 and EN 15804 by Underwriters Laboratories <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	 Loretta Tam, ULE EPD Program Manager
This life cycle assessment was independently verified in accordance with ISO 14044, EN 15804 and the reference PCR by:	 Trisha Montalbo, PE International





FLOORING SYSTEMS

Novilon Viva  
Resilient Floor Covering

According to ISO 14025 &amp; EN 15804

## Product Definition


### Product Classification and Description

This declaration covers a broad range of designs and colors. Cushioned vinyl sheet from Forbo Flooring is a resilient floor covering complying with all the requirements of EN-ISO 26986: Resilient floor coverings – Expanded (cushioned) polyvinyl chloride floor coverings - Specification. The key raw materials include PVC, plasticizer, mineral filler, stabilizers and glass fiber.

The Novilon Collection is a wide range of different cushioned vinyl products for use in both domestic and commercial applications and is sold worldwide.

This declaration refers to Novilon Viva, Forbo Flooring's bestselling cushioned vinyl product.

Novilon Viva consists of 6 different layers:

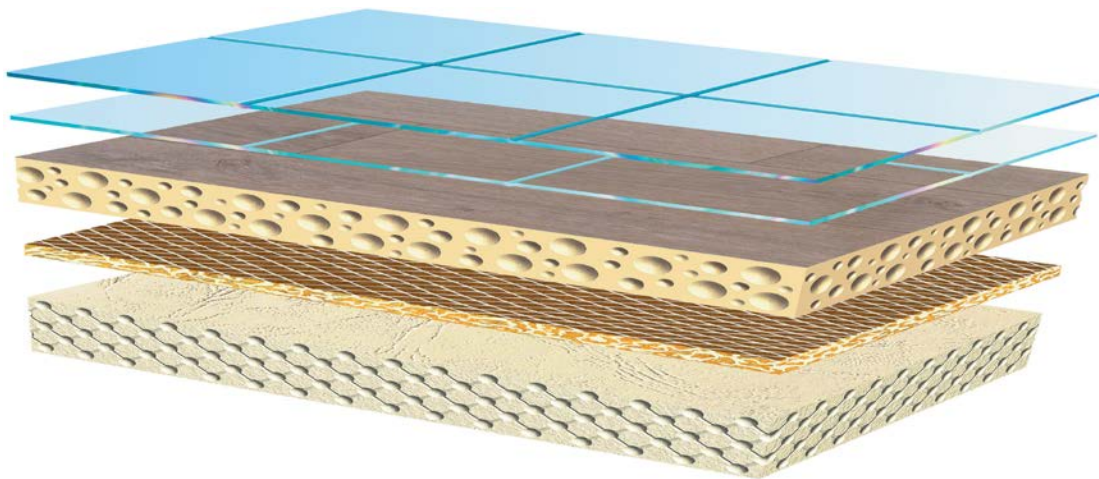

**Figure 1: Construction of Novilon Cushioned Vinyl**

1. **Lacquer surface:** This PU lacquer coating for easy cleaning & maintenance gives enhanced protection against scuffing, scratching, dirt pick up and staining.
2. **Wear layer:** The 0.25mm transparent wear layer.
3. **Printed layer:** The decorative design is printed, using environmentally friendly water-based inks.
4. **Intermediate chemical foam:** A PVC foam layer that is chemically embossed in register with the printed design
5. **Intermediate layer:** Nonwoven glass fleece that is impregnated with a highly filled PVC plastisol to give the product strength & excellent dimensional stability.
6. **Backing layer:** Mechanically foamed PVC layer for superior comfort, impact sound reduction and indentation resistance.





FLOORING SYSTEMS

Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

**Range of Applications**

Project vinyl is classified in accordance with EN-ISO 26986 to be installed in the following use areas defined in EN-ISO 10874:

Area of application	
Domestic	Class 23 
Commercial	Class 31 

**Product Standards**

The products considered in this EPD have the following technical specifications:

- o Meets or exceeds all technical requirements in EN-ISO 26896 Resilient floor coverings – Expanded (cushioned) polyvinyl chloride floor coverings - Specification



Novilon Viva meets the requirements of EN 14041

EN 13501-1	Reaction to fire	B <sub>fl</sub> – s1
EN 13893	Slip resistance	DS: ≥ 0,30
EN 1815	Body voltage	< 2 kV
EN ISO10456	Thermal conductivity	0,25 W/mK

**Accreditations**

- o ISO 9001 Quality Management System
- o ISO 14001 Environmental Management System





Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

**Delivery Status**

**Table 1: Specification of delivered product**

Characteristics	Nominal Value	Unit
Product thickness	2.40	mm
Product Weight	1.85	kg/m <sup>2</sup>
Rolls Width Length	2.00, 3.00, 4.00 30	m

**Material Content**

**Material Content of the Product**

**Table 2: Composition of Novilon Viva**

Component	Material	Availability	Amount [%]	Origin of raw material
Binder	PVC DINP & Dibenzates	Nonrenewable – limited	44.5	Europe
		Nonrenewable - limited	25.5	Europe
Filler	Dolomite	Abundant mineral	21.6	Europe
Stabilizers and process additives	Epoxidized esters & proprietary mixtures & lubricants	2.1% natural oils, others nonrenewable - limited	4.5	Europe
Carrier	Glass fleece	Nonrenewable - limited	3.0	Netherlands/Germany
Pigments & Inks	Titanium Dioxide & water based inks	Nonrenewable - limited	<1.0	Europe
Finish	PU Lacquer	Nonrenewable - limited	<1.0	Europe

**Production of Main Materials**

**PVC:** Polymer which is produced by the polymerisation of vinyl chloride monomer.

**Plasticizers:** Plasticizer is obtained by esterification of an alcohol and acid. Plasticizer is added to increase the flexibility, durability and longevity of the floor covering.

**Stabilizer Ba/Zn:** Mixed metal stabilizer made from Barium and Zinc stearate. It is used to avoid PVC degradation during processing at relative high temperature.

**Dolomite:** An abundant mineral mined in northern Norway.

**Glass fleece:** Glass fibres are mixed with a binder to produce a glass fleece which is used as a substrate for floor coverings and imparts excellent dimensional stability to the finished product.

**Titanium dioxide:** A white pigment produced from the mineral rutile, a naturally occurring form of titanium dioxide. The production of the pigment is a large-scale chemical process





Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

## Production of the Floor Covering

Novilon Viva is produced in stages:

- Preparation of PVC plastisols (mixture of PVC, plasticiser and additives, may also contain filler and pigments)
- Impregnation of the glass fleece with a highly filled plastisol followed by the application of a thin coating of white plastisol containing a chemical blowing agent.
- Rotogravure printing using water based inks to produce wood, stone or abstract designs.
- Application of a transparent PVC plastisol topcoat and PU lacquer. The part processed sheet is then passed through a hot oven (~195°C) to activate the blowing agent to produce a thin foam layer and the PVC topcoat and PU lacquer are fully cured.
- The PVC mechanical foam backing is then applied and cured in a hot oven and the topcoat surface is mechanically embossed to enhance the decorative effect.
- The finished product is then trimmed, inspected and cut into saleable rolls (nominal length – 30 metres). Trimmings and rejected product are recycled on site into Project Vinyl products.

## Health, Safety and Environmental Aspects during Production

- ISO 14001 Environmental Management System

## Production Waste

Rejected material and the cuttings of the trimming stage are being reused, on site, into Project Vinyl products. Packaging materials are being collected separately and externally recycled.

## Delivery and Installation of the Floor Covering

### Delivery

A worldwide distribution by truck and container ship is considered. On average every square meter of Novilon Viva is transported as follows:

- |  |        |
|--|--------|
| ○ Transport distance 40 t truck                      | 342 km |
| ○ Transport distance 7.5t truck (Fine distribution)  | 286 km |
| ○ Capacity utilization trucks (including empty runs) | 85 %   |
| ○ Transport distance Ocean ship                      | 0 km   |
| ○ Capacity utilization Ocean ship                    | 48%    |

Since the vast majority of Novilon Viva is sold in Europe the transport by Ocean ship is negligible.



Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

**Installation**

Because of the specific techniques used during the installation of Novilon Cushioned Vinyl products approximately 6% of the material is cut off as installation waste. For installation of Cushioned Vinyl on the floor a scenario has been modeled assuming 0.30 kg/m<sup>2</sup> of adhesive is applied to the sub-floor. Waste during the installation process may be recycled through the manufacturer’s facility or disposed of via landfill or incineration.

**Health, Safety and Environmental Aspects during Installation**

Forbo flooring recommends to use (low) zero emission adhesives for installing Novilon Cushioned Vinyl floorcovering.

**Waste**

Waste during the installation process may be recycled as floor covering through the manufacturers’ facilities or disposed of via land fill or thermally recycled in a waste incineration plant.

**Packaging**

Cardboard tubes and packaging paper can be collected separately and should be used in a local recycling process. In the calculation model 100% incineration is taken into account for which there is a credit received.

**Use stage**

The service lifetime of a floor covering for a certain application on a floor is too widespread to give one common number. For this EPD model the reference service lifetime (RSL) is set to one year. This means that all impacts for the use phase are based on the cleaning and maintenance model for one year. Depending on the area of use, the technical lifetime advised by the manufacturer and the estimated time on the floor by the customer, the service lifetime can be determined. The use phase impacts should be calculated with the foreseen service life to arrive at the total environmental impact.

**Cleaning and Maintenance**

Level of use	Cleaning Process	Cleaning Frequency	Consumption of energy and resources
Commercial/Residential	Vacuuming	Twice a week	Electricity
	Wet Cleaning	Once a week	Hot water Neutral detergent

For the calculations the following cleaning regime is considered:

- Dry cleaning with a 1.5 kW vacuum cleaner for 0.21 min/m<sup>2</sup>, twice a week. This equates to 0.55 kWh/m<sup>2</sup>\*year.
- Once a week wet cleaning with 0.062 l/m<sup>2</sup> water and 0.0008 kg/m<sup>2</sup> detergent. This result in the use of 3.224 l/m<sup>2</sup>\*year water and 0.04 kg/m<sup>2</sup>\*year detergent. The wet cleaning takes place without power machine usage. Waste water treatment of the arising waste water from cleaning is considered (Data sourced from Forbo GABI model).

The cleaning regime that is recommended in practice will be highly dependent on the use of the premises where the floor covering is installed. In high traffic areas more frequent cleaning will be needed compared to areas where there is low traffic. The use of an entrance mat of at least four steps will reduce the cleaning frequency.

The cleaning regime used in the calculations is suitable for high traffic areas.





FLOORING SYSTEMS

Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

**Prevention of Structural Damage**

All newly laid floor covering should be covered and protected with a suitable non-staining protective covering if other building activities are still in progress. Use protective feet on chairs and tables to reduce scratching. Castor wheels should be suitable for resilient floor coverings.

**Health Aspects during Usage**

- Novilon Viva complies with:
- o AgBB requirements
  - o CHPS section 01350

**End of Life**

The deconstruction of installed Novilon Viva from the floor is done mechanically and the electrical energy needed for this is estimated to be 0.03 kWh/sqm. This amount of energy is included into the calculations. For the End of Life stage, 20% landfill and 80% incineration is taken into account. The average distance to the incineration plant or landfill facility per lorry is set to 200 km.

**Life Cycle Assessment**

A full Life Cycle Assessment has been carried out according to ISO 14040 and ISO 14044.

The following Life Cycle Stages are assessed :

- o Production Stage (Raw material acquisition, transportation to Manufacturing and Manufacturing)
- o Transport Gate to User
- o Installation Stage
- o Use Stage
- o End of Life Stage

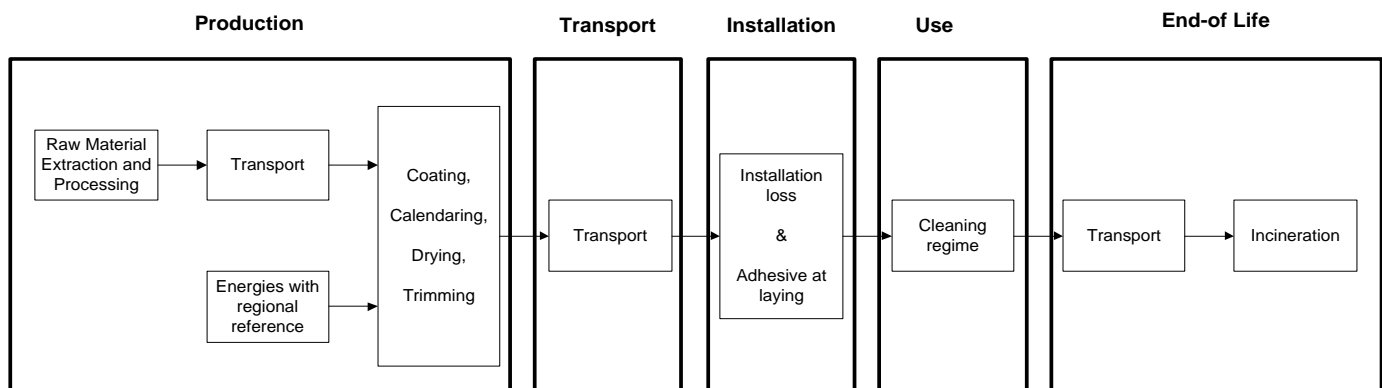


Figure 3: Flow chart of the Life Cycle Assessment

**Description of the Declared Functional Unit**

The functional unit is one square meter of installed product and the use stage is considered for one year of service life.





FLOORING SYSTEMS

Novilon Viva  
Resilient Floor Covering

According to ISO 14025 &amp; EN 15804

### Cut off Criteria

---

The cut-off criteria shall be 1% of renewable and non-renewable primary energy usage and 1% of the total mass of the unit process. The total neglected input flows per module shall be a maximum of 5% of energy usage and mass.

In practice, in this assessment, all data from the production data acquisition are considered, i.e. all raw materials used as per formulation, use of water, electricity and other fuels, the required packaging materials, and all direct production waste. Transport data on all considered inputs and output material are also considered.

### Allocations

---

In the present study some allocations have been made. Detailed explanations can be found in the chapters below.

#### Co-product allocation

---

No co-product allocation occurs in the product system.

#### Allocation of multi-input processes

---

The Production and End of Life stage include incineration plants. In these processes different products are treated together within a process. The allocation procedures followed in these cases are based on a physical classification of the mass flows or calorific values.

Credits from energy substitution are allocated to the production stage, because the gained energy from energy substitution is lower than the energy input in this stage. The same quality of energy is considered.

#### Allocation procedure of reuse, recycling and recovery

---

The installation waste and end of life waste is fed into incineration processes. Incineration processes include cogeneration processes which give thermal and power energy as outputs. It is assumed that this recovered energy offsets that produced by the European average grid mix and thermal energy generation from natural gas.

#### Description of the allocation processes in the LCA report

---

The description of allocation rules in of this LCA report meets the requirements of the PCR.

### Background Data

---

As a general rule, specific data derived from specific production processes or average data derived from specific production processes have been used as the first choice as a basis for calculating an EPD.

For life cycle modeling of the considered products, the GaBi 6 Software System for Life Cycle Engineering, developed by PE INTERNATIONAL AG has been used. All relevant LCA datasets are taken from the GaBi 6 software database. The datasets from the database GaBi are documented in the online documentation. To ensure comparability of results in the LCA, the basic data of GaBi database were used for energy, transportation and auxiliary materials.

### Data Quality

---

The requirements for data quality and LCA data correspond to the specifications of the PCR.

Foreground data are based on 1 year averaged data (year 2012). The reference ages of LCA datasets vary but are given in the table in the Appendix. The time period over which inputs to and outputs from the system is accounted for is 100 years from the year for which the data set is deemed representative. The technological LCA of the collected





FLOORING SYSTEMS

Novilon Viva  
Resilient Floor Covering

According to ISO 14025 &amp; EN 15804

data reflects the physical reality of the declared product. The datasets are complete, conform to the system boundaries and the criteria for the exclusion of inputs and outputs and are geographical representative for the supply chain of Forbo flooring.

For life cycle modeling of the considered products the GaBi 6 Software System for Life Cycle Engineering, developed by PE INTERNATIONAL AG, is used. All relevant LCA datasets are taken from the GaBi 6 software database. The last revision of the used data sets took place within the last 10 years.

### System Boundaries

---

Production Stage includes provision of all materials, products and energy, packaging processing and its transport, as well as waste processing up to the end-of waste state or disposal of final residues during the product stage.

Transport and Installation Stage includes provision of all materials, products and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction stage. These information modules also include all impacts and aspects related to any losses during this construction stage (i.e. production, transport, and waste processing and disposal of the lost products and materials). For the transportation a worldwide distribution is considered.

Use Stage includes provision and transport of all materials, products and related energy and water use, as well as waste processing up to the end-of-waste state or disposal of final residues during this part of the use stage. These information modules also include all impacts and aspects related to the losses during this part of the use stage (i.e. production, transport, and waste processing and disposal of the lost products and materials).

End of Life Stage includes provision and all transports, provision of all materials, products and related energy and water use. It also includes any declared benefits and loads from net flows leaving the product system that have not been allocated as co-products and that have passed the end-of-waste state in the form of reuse, recovery and/or recycling potentials.

### Power mix

---

The selection of LCA data for the electricity generation is in line with the PCR.

The products are manufactured in Coevorden, the Netherlands. The GaBi 6 Hydropower dataset has therefore been used (reference year 2009). The energy supplier is providing Forbo with a certificate every year.

### CO<sub>2</sub>-Certificates

---

No CO<sub>2</sub>-certificates are considered in this study.



Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

**Life Cycle Inventory Analysis**

The total primary energy for one square meter installed Novilon Viva is presented in table 3 with their specific energy resources.

**Table 3: Primary energy for all life cycle stages for Novilon Viva for one year**

Non-renewable primary energy by resources	Unit	Total Life cycle (MJ)	Total Life cycle (%)	Production	Transport	Installation	Use (1 yr)	End of Life
Total non-renewable primary energy	MJ	155.37	100	140.83	0.8	13.05	3.49	-2.8
Crude oil	MJ	55.43	35.68	47.62	0.73	4.7	0.51	1.87
Hard coal	MJ	8.83	5.68	6.69	0	0.28	0.51	1.35
Lignite	MJ	6.98	4.49	5.6	0	0.32	0.39	0.67
Natural gas	MJ	75.95	48.88	74.52	0.06	7.52	1.17	-7.33
Uranium	MJ	8.17	5.26	6.4	0	0.23	0.9	0.64
Renewable primary energy by resources	Unit	Total Life cycle (MJ)	Total Life cycle (%)	Production	Transport	Installation	Use (1 yr)	End of Life
Total renewable primary energy	MJ	11.7	100	11.3	0.03	0.18	0.4	-0.21
Geothermal	MJ	0.02	0.17	0.02	0	0	0.01	0
Hydro power	MJ	5.62	48.03	5.47	0	0.01	0.16	-0.02
Solar energy	MJ	4.61	39.40	4.45	0.03	0.1	0.12	-0.08
Wind power	MJ	1.35	11.54	1.28	0	0.07	0.11	-0.11

The total amount of renewable and non-renewable primary energy is predominated by the production stage for a one year usage; within the production stage the main contributors are the raw material production and energy generation.

**Waste and non-renewable resource consumption**

In table 4 the non-renewable resource consumption and waste production is shown for all life cycle stages for a one year usage.

**Table 4: Waste categories and non-renewable resources for Novilon Viva (one year)**

Wastes	Unit	Total Life cycle	Production	Transport	Installation	Use (1yr)	End of Life
Hazardous waste	[kg]	3.55E-03	1.98E-03	0.00E+00	1.57E-03	0.00E+00	0.00E+00
Non-hazardous waste	[kg]	1.00E+01	8.11E+00	2.84E-03	5.94E-01	5.85E-01	7.38E-01
Radioactive waste	[kg]	2.98E-03	2.35E-03	1.11E-06	1.86E-04	3.66E-04	7.86E-05
Resources	Unit	Total Life cycle	Production	Transport	Installation	Use (1yr)	End of Life
Nonrenewable resources	[kg]	14.11	10.43	0	0.59	0.59	2.5





Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

**Life Cycle Assessment**

In table 5 the environmental impacts for one lifecycle are presented for Novilon Viva. In table 6 the environmental impacts are presented for all the lifecycle stages.

**Table 5: Results of the LCA – Environmental impacts one lifecycle (one year) – Novilon Viva**

Impact Category : CML 2001 – Nov. 2010	Novilon Viva	Unit
Global Warming Potential (GWP 100 years)	1.00E+01	kg CO2-Equiv.
Ozone Layer Depletion Potential (ODP, steady state)	9.38E-08	kg R11-Equiv.
Acidification Potential (AP)	1.74E-02	kg SO2-Equiv.
Eutrophication Potential (EP)	2.70E-03	kg Phosphate-Equiv.
Photochem. Ozone Creation Potential (POCP)	9.51E-03	kg Ethene-Equiv.
Abiotic Depletion Potential Elements (ADPE)	2.40E-05	kg Sb-Equiv.
Abiotic Depletion Potential Fossil (ADPF)	1.55E+02	[MJ]

**Table 6: Results of the LCA – Environmental impact for Novilon Viva (one year)**

Impact Category : CML 2001 – Nov. 2010	Unit	Production	Transport	Installation	Use (1yr)	End of Life
Global Warming Potential	kg CO2-Equiv.	6.48E+00	1.10E-01	7.11E-01	1.88E-01	2.54E+00
Ozone Layer Depletion Potential	kg R11-Equiv.	2.01E-08	1.01E-12	2.36E-09	2.18E-09	6.92E-08
Acidification Potential	kg SO2-Equiv.	1.31E-02	2.36E-04	1.46E-03	7.15E-04	1.91E-03
Eutrophication Potential	kg PSO4-Equiv.	2.32E-03	5.38E-05	1.64E-04	4.96E-05	1.17E-04
Photochem. Ozone Creation Potential	kg Ethene-Equiv.	9.12E-03	-8.07E-05	2.93E-04	5.44E-05	1.28E-04
Abiotic Depletion Elements	kg Sb-Equiv.	2.14E-05	2.15E-09	2.49E-07	4.53E-08	2.30E-06
Abiotic Depletion Fossil	MJ	1.40E+02	7.98E-01	1.30E+01	3.43E+00	-3.10E+00

The relative contribution of each process stage to each impact category for Novilon Viva is shown in figure 4.






FLOORING SYSTEMS

Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

Figure 4: relative contribution of each process stage to each impact category for Novilon Viva for a one year usage.

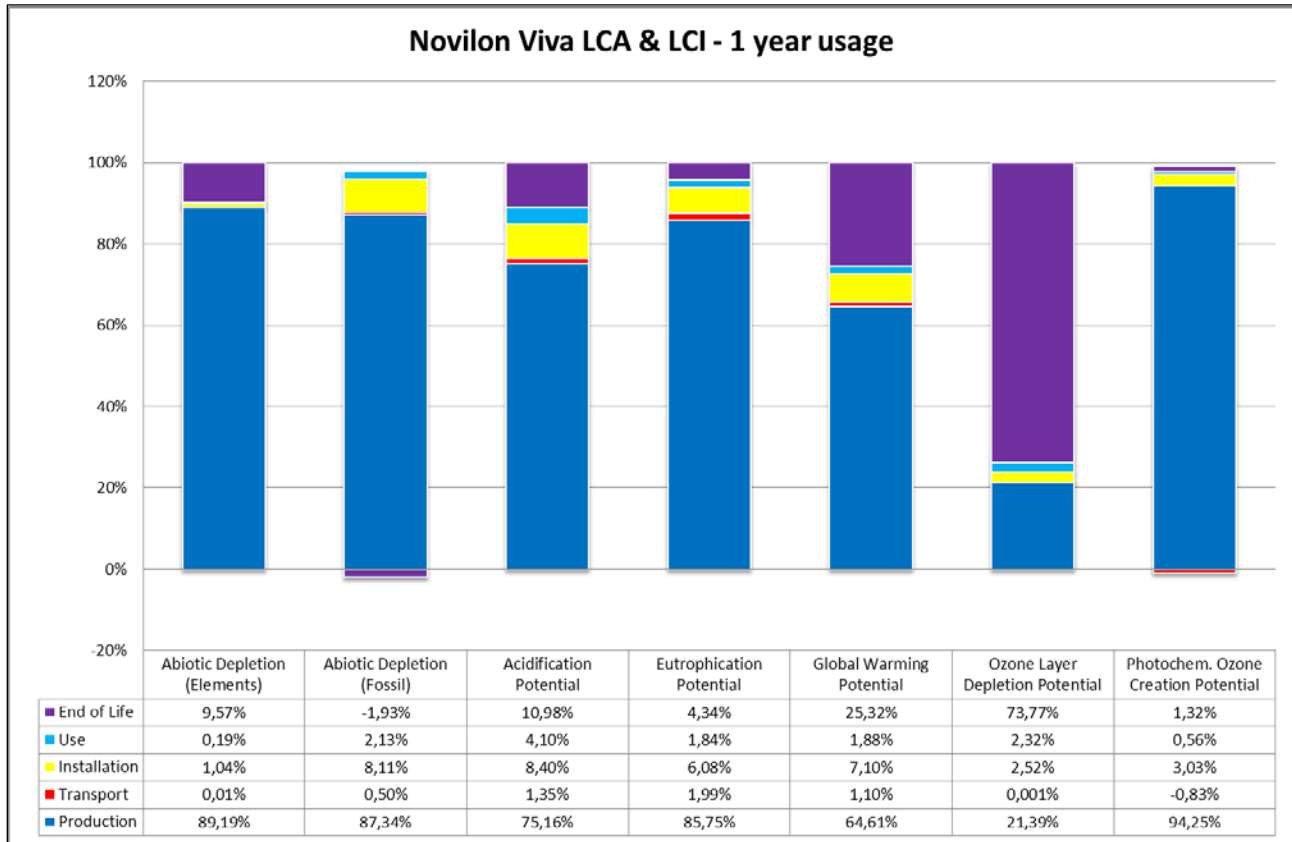

**Interpretation**

The interpretation of the results has been carried out considering the assumptions and limitations declared in the EPD, both methodology- and data-related for a one year usage.

In most of the impact categories (ADPE, ADPF, AP, EP, GWP and POCP) the production stage has the main contribution to the overall impact and except for POCP the raw material supply is the key contributor with a share of 83 – 98%. For POCP the share of the Forbo manufacturing stage is 67%, caused by the use of energy during the manufacturing of Novilon Viva.

For the transportation stage a minor contribution comes from the categories GWP, AP and EP in which the 40t trucks used for the European distribution are the major contributors.

For GWP, AP, EP and ADPF the adhesive for the flooring installation has an impact of approximately 6 – 8½% of the total. Also for the use stage these are the main impact categories, mainly caused by the use of electricity for cleaning.

At the End of Life stage the main impact categories are AP, ADPE, GWP and ODP, this is mainly due to the fact that 80% of the waste is incinerated.





Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

## Additional Environmental Information

To be fully transparent Forbo Flooring does not only want to declare the environmental impacts required in the PCR, but also the impacts on human health and eco-toxicity. Furthermore the outcome of the calculations according to the European Standard EN15804 are published in this section.

### Toxicity

For this calculations the USEtox™ model is used as being the globally recommended preferred model for characterization modeling of human and eco-toxic impacts in LCIA by the United Nations Environment Programme SETAC Life Cycle Initiative.

According to the "ILCD Handbook: Recommendations for Life Cycle Impact Assessment in the European context" the recommended characterization models and associated characterization factors are classified according to their quality into three levels:

- Level I (recommended and satisfactory),
- Level II (recommended but in need of some improvements)
- Level III (recommended, but to be applied with caution).

A mixed classification sometimes is related to the application of the classified method to different types of substances. USEtox™ is classified as Level II / III, unlike for example the CML impact categories which are classified as Level I.

**Table 7: Results of the LCA – Environmental impacts one lifecycle (one year) – Novilon Viva**

Impact Category : USEtox	Novilon Viva	Unit
Eco toxicity	7.86E-01	PAF m3.day
Human toxicity, cancer	6.97E-09	Cases
Human toxicity, non-canc.	1.34E-06	Cases

In the following table the impacts are subdivided into the lifecycle stages.

**Table 8: Results of the LCA – Environmental impact for Novilon Viva (one year)**

Impact Category : USEtox	Unit	Production	Transport	Installation	Use (1yr)	End of Life
Eco toxicity	PAF m3.day	7.55E-01	7.20E-03	1.46E-02	1.47E-02	-5.67E-03
Human toxicity, cancer	cases	6.57E-09	3.00E-11	2.51E-10	1.52E-10	-3.12E-11
Human toxicity, non-canc.	cases	1.30E-06	1.41E-08	2.11E-08	2.75E-08	-1.48E-08

### Interpretation

The interpretation of the results has been carried out considering the assumptions and limitations declared in the EPD, both methodology- and data-related for a one year usage.

In all the Toxicity categories the production stage is the main contributor to the total overall impact. The raw material supply has a share of more than 97% of the production stage, therefore the choice of raw materials can highly influence the Toxicity categories.

For the Installation stage the impact of 1½ - 3½% is mainly due to the adhesive used, that is why Forbo recommends to use (low) zero emission adhesives for installing Novilon Cushioned Vinyl floorcovering.

The Use stage has a minor impact of ± 2% for all three impact categories. This is mainly due to the use of electricity for the cleaning of the floor. The used cleaning regime of vacuuming twice a week is very conservative and will in practice most of the times be lower.





FLOORING SYSTEMS

Novilon Viva  
Resilient Floor Covering

According to ISO 14025 & EN 15804

EN15804 Results

In this section the calculations have been conducted and verified according to the requirements of the European Standard EN 15804. In addition, calculations followed the document “Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report”, however, Part A was not included as a part of the verification.

Table 9: Results of the LCA – Environmental impact for Novilon Viva (one year)

Parameter	Unit	Manufacturing	Installation			Use (1yr)	End of Life				Credits
		A1-3	A4	A5	B2	C1	C2	C3	C4	D	
GWP	[kg CO2-Equiv.]	5.63E+00	1.10E-01	7.90E-01	1.88E-01	1.13E-02	4.93E-02	2.40E+00	7.28E-02	-7.84E-02	
ODP	[kg CFC11-Equiv.]	2.00E-08	1.01E-12	2.40E-09	2.18E-09	2.87E-09	1.03E-12	6.51E-08	1.23E-09	-3.22E-11	
AP	[kg SO2-Equiv.]	1.12E-02	2.36E-04	1.66E-03	7.15E-04	7.71E-05	2.47E-04	1.56E-03	2.86E-05	-2.00E-04	
EP	[kg PO43-- Equiv.]	2.13E-03	5.38E-05	1.77E-04	4.96E-05	2.81E-06	5.96E-05	4.82E-05	6.69E-06	-1.32E-05	
POCP	[kg Ethen Equiv.]	8.37E-03	-8.07E-05	3.09E-04	5.44E-05	3.97E-06	2.64E-05	7.79E-05	1.96E-05	-1.60E-05	
ADPE	[kg Sb Equiv.]	1.96E-05	2.15E-09	2.56E-07	4.53E-08	7.78E-10	2.27E-09	2.30E-06	-6.96E-10	-6.46E-09	
ADPF	[MJ]	1.19E+02	7.98E-01	1.44E+01	3.43E+00	2.17E-01	6.75E-01	-4.04E+00	4.39E-02	-1.33E+00	

GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources

Table 10: Results of the LCA – Resource use for Novilon Viva (one year)

Parameter	Unit	Manufacturing	Installation			Use (1yr)	End of Life				Credits
		A1-3	A4	A5	B2	C1	C2	C3	C4	D	
PERE	[MJ]	-	-	-	-	-	-	-	-	-	
PERM	[MJ]	-	-	-	-	-	-	-	-	-	
PERT	[MJ]	1.10E+01	3.13E-02	2.82E-01	3.96E-01	1.70E-02	3.99E-02	-2.51E-01	-1.34E-02	-1.05E-01	
PENRE	[MJ]	-	-	-	-	-	-	-	-	-	
PENRM	[MJ]	-	-	-	-	-	-	-	-	-	
PENRT	[MJ]	1.19E+02	7.98E-01	1.44E+01	3.49E+00	2.20E-01	6.75E-01	-3.74E+00	5.26E-02	-1.33E+00	
SM	[kg]	-1.33E-01	-	-	-	-	-	-	-	-	
RSF	[MJ]	2.27E-03	5.04E-06	2.14E-04	4.73E-05	0.00E+00	5.02E-06	-1.53E-04	-2.72E-06	-1.91E-05	
NRSF	[MJ]	2.38E-02	5.28E-05	2.24E-03	4.96E-04	0.00E+00	5.25E-05	-1.60E-03	-2.85E-05	-2.00E-04	
FW	[kg]	1.80E+01	3.47E-02	2.80E+00	4.23E+00	-5.31E-02	3.85E-02	-2.18E+00	-2.77E-01	-2.93E-01	

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

Table 11: Results of the LCA – Output flows and Waste categories for Novilon Viva (one year)

Parameter	Unit	Manufacturing	Transport	Installation	Use (1yr)	End of Life/credits				
		A1-3	A4	A5	B2	C1	C2	C3	C4	D
HWD	[kg]	1.98E-03	0.00E+00	1.57E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NHWD	[kg]	8.11E+00	2.84E-03	5.94E-01	5.85E-01	4.03E-02	4.17E-03	8.49E-01	-1.24E-02	-1.43E-01
RWD	[kg]	2.35E-03	1.11E-06	1.86E-04	3.66E-04	3.61E-05	9.68E-07	1.48E-04	-1.40E-05	-9.25E-05
CRU	[kg]	-	-	-	-	-	-	-	-	-
MFR	[kg]	-	-	-	-	-	-	-	-	-
MER	[kg]	-	-	-	-	-	-	-	-	-
EE Power	[MJ]	-	-	1.06E-01	-	-	-	1.17E+00	-	-
EE Thermal energy	[MJ]	-	-	1.98E-01	-	-	-	9.23E+00	-	-

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy per energy carrier

Interpretation

The interpretation of the environmental impacts calculated according to EN 15804 are similar to the interpretation according to ISO 14025 on page 12. A more detailed interpretation is published in the appendix.





FLOORING SYSTEMS

Novilon Viva  
Resilient Floor Covering

According to ISO 14025 &amp; EN 15804

## References

GABI 6 2012	PE INTERNATIONAL AG; GaBi 6: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2012.
GABI 6 2012D	GaBi 6: Documentation of GaBi 6: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2012. <a href="http://documentation.gabi-software.com/">http://documentation.gabi-software.com/</a>
NSF International May 22, 2012	Product Category Rule for Environmental Product Declarations <i>Flooring: Carpet, Resilient, Laminate, Ceramic, Wood</i>
UL ENVIRONMENT	UL Environment's Program Operator Rules
ERFMI 2008	Final report: LCA, Environmental Information Sheet and Eco design Model of Resilient Flooring by order of ERFMI, PE International, 2008
IBU 2011	PCR - Part A: Calculation rules for the Life Cycle Assessment and Requirements on the Background Report, Institut Bauen und Umwelt e.V.
PE 2012	Description of Selected Impact Categories, PE International AG, 2012
ILCD Handbook: General guide for Life Cycle Assessment - Detailed guidance	European Commission - Joint Research Centre - Institute for Environment and Sustainability: International Reference Life Cycle Data System (ILCD) Handbook - General guide for Life Cycle Assessment - Detailed guidance. First edition March 2010. EUR 24708 EN. Luxembourg. Publications Office of the European Union; 2010
<b>STANDARDS AND LAWS</b>	
DIN EN ISO 14044	Environmental management - Life cycle assessment - Requirements and guidelines (ISO 14044:2006); German and English version EN ISO 14044
ISO 14025 2006	DIN EN ISO 14025: Environmental labels and declarations — Type III environmental declarations — Principles and procedures
ISO 14040 2006	Environmental management - Life cycle assessment - Principles and framework (ISO 14040); German and English version EN ISO 14040
CEN/TR 15941	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; German version CEN/TR 15941
EN 15804	EN 15804: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products
ISO 24011	Resilient floor coverings - Specification for plain and decorative linoleum
CPR	REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonized conditions for the marketing of construction products and repealing Council Directive 89/106/EEC
EN-ISO 10874	Resilient, textile and laminate floor coverings - Classification