


# EXCERPT FROM PROLINK ENGINEERING MANUAL

11/22 (Ref-No. 888)

**siegling prolink**  
modular belts

## SERIES 17

Straight running belts  
Pitch 25.4 mm (1 in)

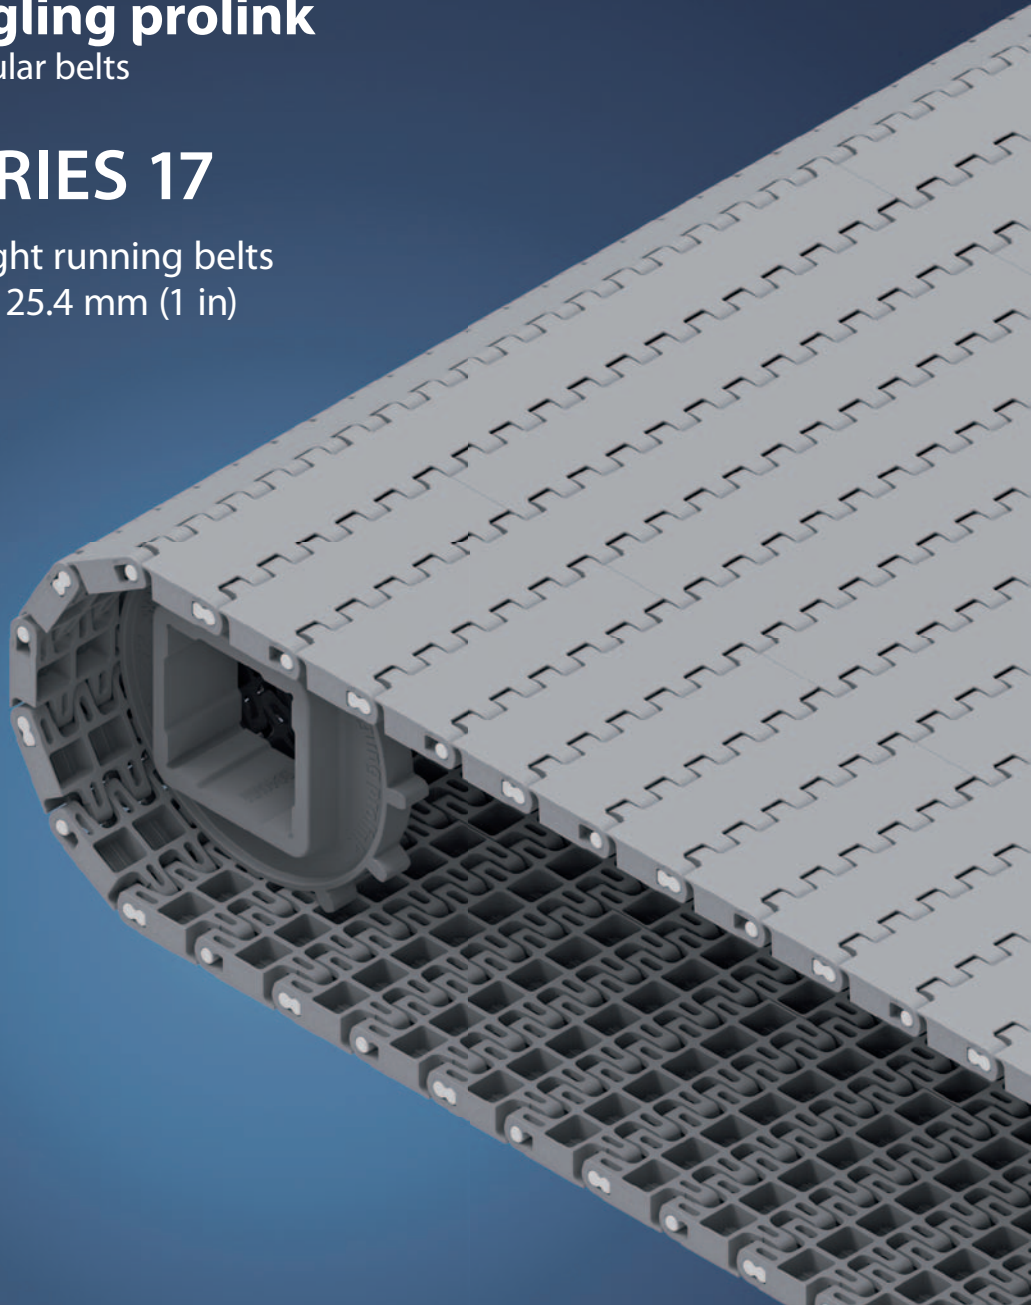

**Forbo Siegling GmbH**  
Lilienthalstraße 6/8, D-30179 Hannover  
Phone +49 511 6704 0  
[www.forbo-siegling.com](http://www.forbo-siegling.com), [siegling@forbo.com](mailto:siegling@forbo.com)

Ref. no. 888-2\_1.2\_S17


# SERIES 17 | OVERVIEW

siegling prolink  
modular belts

Straight running belts | Pitch 25.4 mm (1 in)

Medium to heavy-duty belts for industrial applications

## Side view scale 1:1




## Design characteristics

- Closed hinge design provides high belt pull capacity
- A rigid module design allows optimal utilization of belt pull capacity relative to belt weight
- Robust design guarantees durability
- Unique 'keyhole' pin retention system ensures easy pin removal

## Basic data

Pitch	25.4 mm (1 in)
Belt width min.	76.2 mm (3 in)
Width increments	12.7 mm (0.5 in)
Hinge pins	4.2 mm (0.17 in) made of plastic (PBT, PP)

## Available surface pattern and opening area

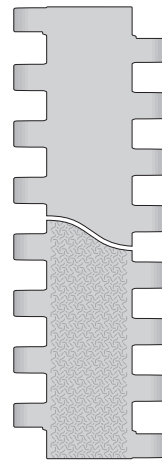

### S17-0 FLT


Closed, smooth surface

### S17-0 SRS

Closed, slip-resistant surface


## Sprockets

in different sizes with round or square sprocket bore



## Profiles

for incline conveyors





# SERIES 17 | BELT TYPES

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S17-0 FLT | 0% Opening | Flat top

Closed, smooth surface | Flat top surface

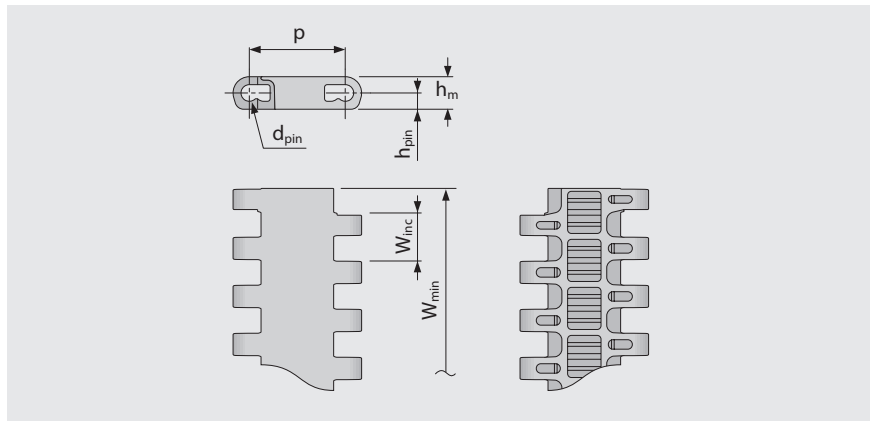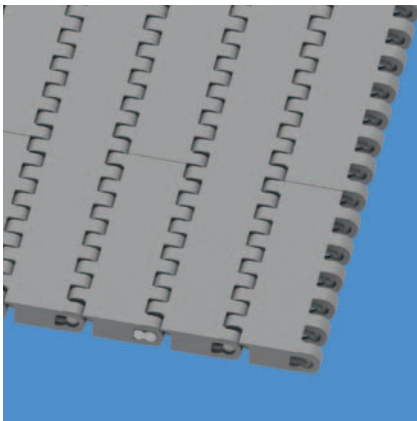

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness [mm]	Pin position [mm]	Height [mm]	Width min. [mm]	Width Increment [mm]	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	4.2	8.6	4.3	0.0	76.2	12.7	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.34	0.17	0.0	3.0	0.5	±0.2	–	1.0	2.0	3.0	1.0

### Available standard materials<sup>4)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates	
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	FDA <sup>2)</sup>	EU <sup>3)</sup>
POM	LG	PBT	UC	32	2193	6.5	1.33	-0.09	-45/90	-49/194	●	●
PP	BL	PP	BL	18	1233	4.2	0.86	0.35	5/100	41/212	●	●

Mold to width available in: 76 mm (3.0 in), 229 mm (9.0 in)

■ BL (Blue), ■ LG (Light gray), □ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with FDA 21 CFR

<sup>3)</sup> Complies with (EU) 10/2011 and (EC) 1935/2004 regulations regarding the raw materials used and the migration thresholds

<sup>4)</sup> More materials and colors on request



MOVEMENT SYSTEMS



# SERIES 17 | BELT TYPES

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S17-0 SRS | 0% Opening | Slip-resistant surface

Closed surface | Slip-resistant surface, pleasant to walk and kneel on

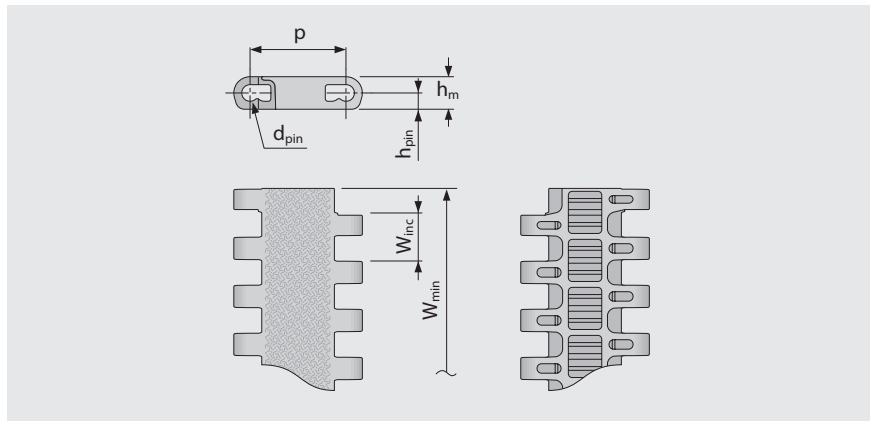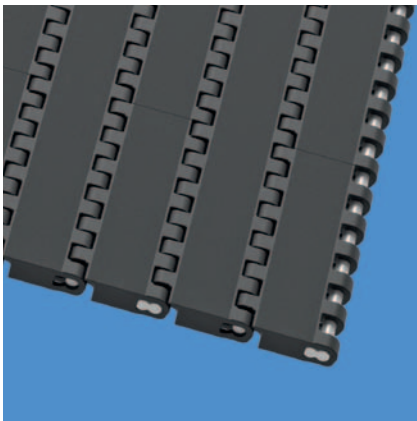

### Belt dimensions

	p	d <sub>pin</sub>	h <sub>m</sub>	h <sub>pin</sub>	h <sub>s</sub>	W <sub>min</sub>	W <sub>inc</sub>	W <sub>tol</sub>	Minimum flex radii <sup>1)</sup>				
	Pitch	Pin Ø	Thickness [mm]	Pin position [mm]	Height [mm]	Width min. [mm]	Width Increment [mm]	Width tolerance [%]	r1 C <sub>c</sub> x W <sub>B</sub>	r2	r3	r4	r5
mm	25.4	4.2	8.6	4.3	0.0	76.2	12.7	±0.2	–	25.4	50.8	76.2	25.4
inch	1.0	0.17	0.34	0.17	0.0	3.0	0.5	±0.2	–	1.0	2.0	3.0	1.0

### Mold to order belts<sup>4)</sup>

Belt		Pin		Nominal belt pull, straight		Weight		Width deviation	Temperature		Certificates
Material	Color	Material	Color	[N/mm]	[lb/ft]	[kg/m <sup>2</sup> ]	[lb/ft <sup>2</sup> ]	[%]	[°C]	[°F]	Flame retardant <sup>2)</sup>
PXX-HC	BK	PBT	UC	14	822	5.7	1.17	0.35	5/100	41/212	●

Mold to width available in: 76 mm (3.0 in), 229 mm (9.0 in)

■ BK (Black), □ UC (Uncolored)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

<sup>1)</sup> Flex radii: r1 = side flex, r2 = front flex on roller, r3 = back flex on load bearing roller, r4 = back flex on Hold Down shoe, r5 = back flex on roller

<sup>2)</sup> Complies with DIN EN 13501-1 Cfl-s1 (and DIN 4102 B1)

<sup>4)</sup> More materials and colors on request





MOVEMENT SYSTEMS

# SERIES 17 | SPROCKETS

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S17 SPR | Sprockets

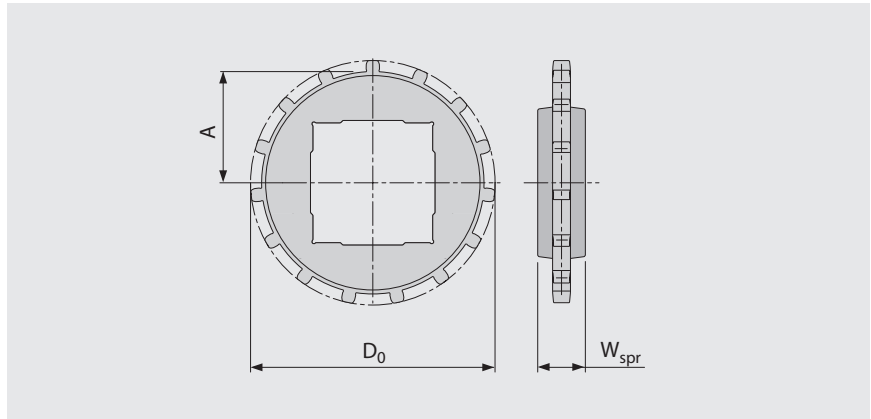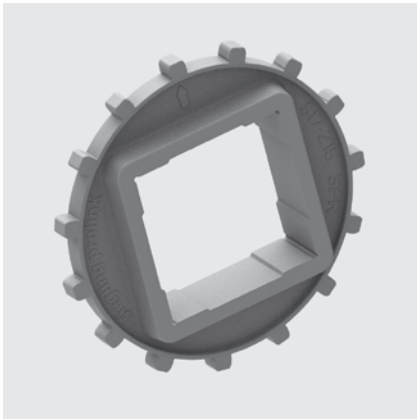

### Main dimensions

Sprocket size (Number of teeth)		Z12	Z15	Z18	Z19
W <sub>spr</sub>	mm	24.0	24.0	24.0	24.0
	inch	0.94	0.94	0.94	0.94
D <sub>0</sub>	mm	99.7	123.2	148.0	156.1
	inch	3.93	4.85	5.83	6.15
A <sub>max</sub>	mm	45.8	57.4	70.0	73.9
	inch	1.80	2.26	2.76	2.91
A <sub>min</sub>	mm	44.0	56.0	68.7	72.7
	inch	1.73	2.20	2.70	2.86

### Shaft bores (● = Round, ■ = Square)

30	mm	●			
40	mm	■		●/■	
60	mm		■		■
80	mm			■	■
1.25	inch	●			
1.5	inch	■		●/■	
2.5	inch		■	■	■

Material: PA, Color: LG

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

For detailed sprocket and shaft dimensions see appendix 6.3

Number of sprockets (sprocket spacing distance) see chapter 3.2



MOVEMENT SYSTEMS



# SERIES 17 | PROFILES

siegling prolink  
modular belts

Straight running belt | Pitch 25.4 mm (1 in)

## S17-0 FLT PMU I83


Lateral rib with indent 83 mm (3.3 in) to carry goods with small profiles

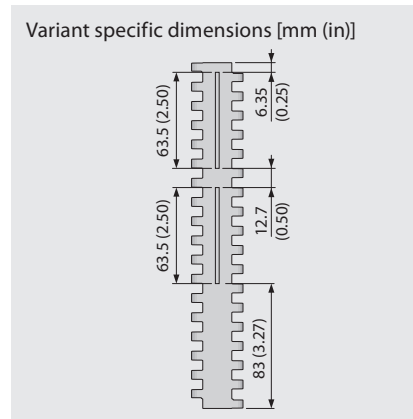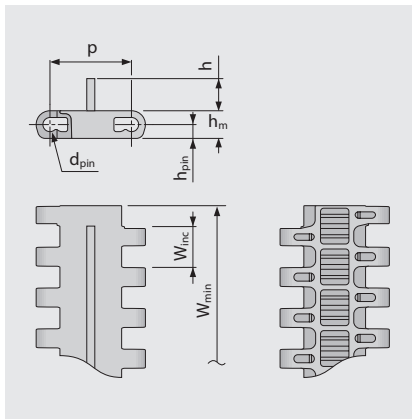

### Basic data

Material	Color	Height (h)
		10 mm 0.39 inch
POM	LG	●

Molded width: 228.6 mm (9.0 in)

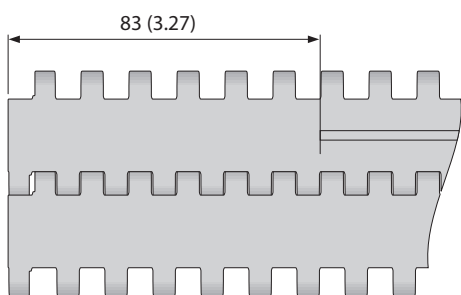

Standard configuration S17-0 FLT PMU I83

■ LG (Light gray)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS

# LEGEND

① Series	
S1 ... S18	

② Open area/Sprocket size	
Percentage open area	
Format: xx	
E.g. 20 = 20%	
For sprockets: number of teeth	
Format: "Z"xx	
E.g. Z12 = 12 teeth	

③ Surface pattern	
<b>BSL</b>	Base module for slider
<b>CTP</b>	Cone top
<b>CUT</b>	Curved top
<b>FLT</b>	Flat top (smooth)
<b>FRT-OG</b>	Friction top without High Grip insert
<b>FRT(X)</b>	Friction top (Design X)
<b>GRT</b>	Grid top
<b>HDK</b>	High Deck
<b>LRB</b>	Lateral rib
<b>MOD</b>	Modified module shape
<b>NCL</b>	No cling
<b>NPY</b>	Negative pyramid
<b>NSK</b>	Non skid
<b>NSK2</b>	Non skid, nonwoven variant
<b>NTP</b>	Nub top (round studs)
<b>PRR</b>	Pin Retained Rollers
<b>RAT</b>	Radius top
<b>RRB</b>	Raised rib
<b>RSA</b>	Reduced surface area
<b>RTP</b>	Roller top
<b>SRS</b>	Slip-resistant surface

④ Type	
<b>BPU</b>	Bucket profile
<b>CAP</b>	Pin lock & belt edge sealing
<b>CCW</b>	Counter clockwise
<b>CLP</b>	Clip
<b>CM</b>	Center module
<b>CW</b>	Clockwise
<b>FPL</b>	Finger plate
<b>HDT</b>	Hold Down Tab
<b>IDL</b>	Idler
<b>PIN</b>	Coupling rod
<b>PMC</b>	Profile module center
<b>PMU</b>	Profile module universal
<b>PSP</b>	ProSnap
<b>RI</b>	High Grip insert
<b>RTR</b>	Retaining ring
<b>SG</b>	Module with sideguard
<b>SLI</b>	Slider
<b>SML</b>	Side module, left
<b>SMR</b>	Side module, right
<b>SMU</b>	Side module, universal/both sides
<b>SPR</b>	Sprocket
<b>TPL</b>	Turning panel, left
<b>TPR</b>	Turning panel, right
<b>UM</b>	Universal module
<b>WSC</b>	Wheel Stopper Center
<b>WSS</b>	Wheel Stopper Side

⑥ Style	
<b>1.7</b>	1.7 collapse factor
<b>2.2</b>	2.2 collapse factor
<b>2.2 G</b>	2.2 collapse factor, guided
<b>A90</b>	Angle 90° to conveying direction
<b>BT</b>	Bearing tab
<b>DR</b>	Double row sprocket
<b>F1, F2, F3 ...</b>	Collapse factor modules
<b>G</b>	Guided
<b>GT</b>	Guiding tabs
<b>HD</b>	Hold Down
<b>Ixx</b>	xx = indent in mm
<b>RG</b>	Reversed guided
<b>SG</b>	Side guard
<b>SP</b>	Split sprocket
<b>ST</b>	Strong

⑥ Material	
<b>PA</b>	Polyamide
<b>PA-HT</b>	Polyamide high temperature
<b>PBT</b>	Polybutylenterephthalate
<b>PE</b>	Polyethylene
<b>PE-MD</b>	PE metal detectable
<b>PLX</b>	Wear & impact improved polymer
<b>POM</b>	Polyoxymethylene (Polyacetal)
<b>POM-CR</b>	POM cut resistant
<b>POM-HC</b>	POM highly conductive
<b>POM-MD</b>	POM metal detectable
<b>POM-PE</b>	POM side modules + PE center modules
<b>POM-PP</b>	POM side modules + PP center modules
<b>PP</b>	Polypropylene
<b>PXX-HC</b>	Self-extinguishing highly conductive material
<b>R1</b>	TPE 80 Shore A, PP
<b>R2</b>	EPDM 80 Shore A, vulcanized
<b>R3</b>	TPE 70 Shore A, POM
<b>R4</b>	TPE 86 Shore A, PP
<b>R5</b>	TPE 52 Shore A, PP
<b>R6</b>	TPE 63 Shore A, POM
<b>R7</b>	TPE 50 Shore A, PP
<b>R8</b>	TPE 55 Shore A, PE
<b>SER</b>	Self-extinguishing TPE
<b>SS</b>	Stainless steel
<b>TPC1</b>	Thermoplastic Copolyester
<b>-HA</b>	Supports the HACCP concept
<b>-HW</b>	High Wear resistant material

⑦ Color*		
<b>AT</b>	Anthracite	
<b>BG</b>	Beige	
<b>BK</b>	Black	
<b>BL</b>	Blue	
<b>DB</b>	Dark blue	
<b>GN</b>	Green	
<b>LB</b>	Light blue	
<b>LG</b>	Light gray	
<b>OR</b>	Orange	
<b>RE</b>	Red	
<b>TQ</b>	Turquoise	
<b>UC</b>	Uncolored	
<b>WT</b>	White	
<b>YL</b>	Yellow	

⑧ Height/Diameter/Bore size and style	
Height in mm (in)	
Format: Hxxx	
Pin diameter in mm (in)	
Format: Dxxx	
Bore size: SQ (= square) or RD (= round)	
either in mm or inches	
Format: SQxxMM or RDxxIN	

⑨ Length/Width	
Pins Length in mm (in)	
Format: Lxxx	
Module width in mm (in)	
Format: Wxxx	

\* For each series' standard colors please refer to the table of materials for each belt (chapter 1.2). A number of other colors are available on request. Colors can vary from the original due to the print, production processes or material used.