

## Technical specifications

### Nuway connect with Coral classic textile insert

Combination	Textile only						Textile and 4 row bristle					
	Open			Closed			Open			Closed		
System	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm
Depth to height of aluminium (mm)	8	14	19	8	14	19	8	14	19	8	14	19
Depth to height of insert (mm)	11	17	22	11	17	22	15	21	26	15	21	26
Distance between the profiles (mm)	5			0			5			0		
Weight (kg)	9.5	13.2	14.9	10.5	15.1	17.1	11.1	15.1	16.9	12.4	17.4	19.4
Max width per module (mm)	3000											
Max depth per module (mm)	Relates to the weight											
Max weight per module (kg)	23											
Dynamic load (kg) wheel of 80mm, 40,000 passes	200	200	200	200	200	200	50	50	50	50	50	50
Static load (kg/sqcm)	200	200	200	200	200	200	100	100	100	100	100	100
Fire behaviour EN ISO 9239-1	B <sub>f</sub> s1						C <sub>f</sub> s1					
Frame	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3
Ramp frame	11 x 49	17 x 70		11 x 49	17 x 70		11 x 49	17 x 70		11 x 49	17 x 70	
Material and manufacturing method	Anodised aluminium profiles with PVC connector profiles, stainless steel clips											
Wiper design	Coral clean-off system						Coral clean-off system and 4 row bristles					
Wiper material	100% polyamide BCF						100% polyamide BCF for both textile and bristles					

### Nuway connect with Coral classic textile insert

Combination	Bristle only						Bristle and Rubber					
	Open			Closed			Open			Closed		
System	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm
Depth to height of aluminium (mm)	8	14	19	8	14	19	8	14	19	8	14	19
Depth to height of insert (mm)	15	21	26	15	21	26	15	21	26	15	21	26
Distance between the profiles (mm)	5			0			5			0		
Weight (kg)	12.7	17.1	18.8	14.2	19.6	21.6	12.3	16.6	18.3	13.8	19.1	21.1
Max width per module (mm)	3000											
Max depth per module (mm)	Relates to the weight											
Max weight per module (kg)	23											
Dynamic load (kg) wheel of 80mm, 40,000 passes	50	50	50	50	50	50	50	50	50	50	50	50
Static load (kg/sqcm)	100	100	100	100	100	100	100	100	100	100	100	100
Fire behaviour EN ISO 9239-1	C <sub>f</sub> s1						C <sub>f</sub> s1					
Frame	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3
Ramp frame	11 x 49	17 x 70		11 x 49	17 x 70		11 x 49	17 x 70		11 x 49	17 x 70	
Material and manufacturing method	Anodised aluminium profiles with PVC connector profiles, stainless steel clips											
Wiper design	4 row bristles						4 row bristles and ribbed rubber					
Wiper material	100% polyamide BCF						100% polyamide BCF for bristles and 100% EPDM for rubber					

Please note EPDM rubber is Ethylene Propylene Diene Monomer.


# Technical specifications

## Nuway connect with Coral classic textile insert


Combination	Rubber only					
	Open			Closed		
System	10mm	17mm	22mm	10mm	17mm	22mm
Depth to height of aluminium (mm)	8	14	19	8	14	19
Depth to height of insert (mm)	12	18	23	12	18	23
Distance between the profiles (mm)	5			0		
Weight (kg)	12.0	16.2	17.9	13.3	18.6	20.6
Max width per module (mm)	3000					
Max depth per module (mm)	Relates to the weight					
Max weight per module (kg)	23					
Dynamic load (kg) wheel of 80mm, 40,000 passes	100	100	100	100	100	100
Static load (kg/sqcm)	100	100	100	100	100	100
Fire behaviour EN ISO 9239-1	C <sub>fl</sub> s1					
Frame	13 x 13 x 1.7	19 x 19 x 1.7	25 x 25 x 3	13 x 13 x 1.7	19 x 19 x 1.7	25 x 25 x 3
Ramp frame	11 x 49	17 x 70		11 x 49	17 x 70	
Material and manufacturing method	Anodised aluminium profiles with PVC connector profiles, stainless steel clips					
Wiper design	Ribbed rubber					
Wiper material	100% EPDM					

## Main dimensions shown in mm


### Nuway connect 10mm

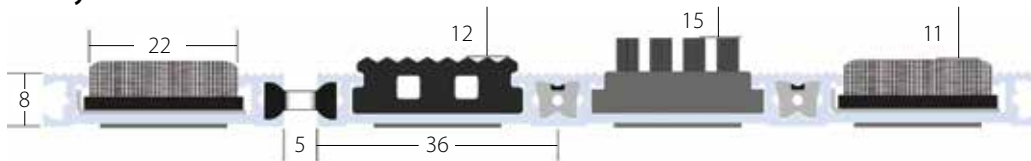

### Nuway connect 17mm

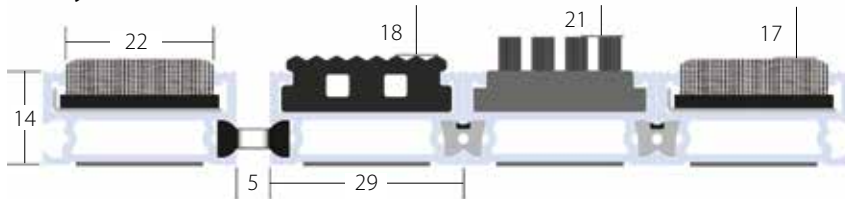

### Nuway connect 22mm

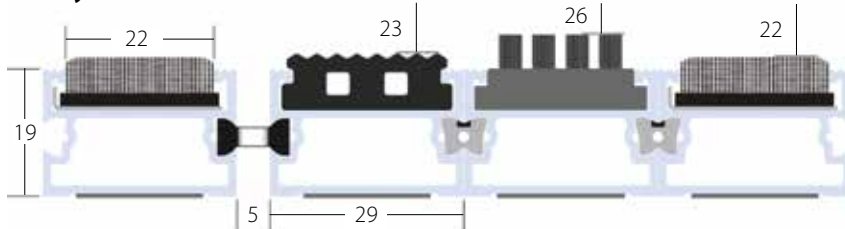

#### Nuway enquiries:

Tel: 01773 740 688

Fax: 01773 740 640

Email: [info.flooring.uk@forbo.com](mailto:info.flooring.uk@forbo.com)

[www.forbo-flooring.co.uk](http://www.forbo-flooring.co.uk)

#### Samples:

Tel: 0800 731 2369

#### Registered office:

Forbo Flooring UK Limited

Den Road, Kirkcaldy

Fife KY1 2ER

Registered in Scotland: No 41400

