



Textile Flocked flooring

flotex[®] journeys II



creating better environments


Forbo
FLOORING SYSTEMS



flotex®
High Performance Textile

The **only flooring solution** that addresses all your long term care needs

FLOTEX SHEET CONSTRUCTION

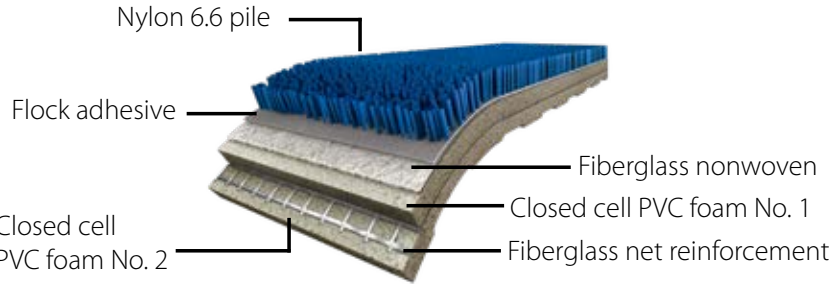

- CHECKLIST

 - ✓ Durable
 - ✓ Slip resistant
 - ✓ No transition strips
 - ✓ Acoustical properties
 - ✓ Hygienic
 - ✓ Easy to clean
 - ✓ Affordable

flotex® journeys II



630001-II | yellowstone



630004-II | black hills



630001-II | yellowstone
630004-II | black hills



630004-II | black hills

THE HIGH-TECH TEXTILE FLOORING



EXCELLENT
SLIP RESISTANCE
WHEN WET



WASHABLE AND
WATERPROOF



MECHANICAL
WET CLEANING
POSSIBLE



THE ONLY TEXTILE
FLOORING INSTEAD OF
FLOORING CARPET.



TRANSITION STRIPS
ARE NOT NEEDED.
NO TRIP.

flotex® journeys II



630002-II | cypress falls



630003-II | glacier bay



630009-II | mesa verde



630006-II | sequoia



630002-II | cypress falls



630009-II | mesa verde

flotex® journeys II



630011-II | grand canyon



630008-II | laurentian mountains



630007-II | joshua tree



630010-II | everglades



630011-II | grand canyon



630010-II | everglades

flotex® journeys II



630005-II | green mountain



630012-II | acadia



630013-II | wheat sheaf



630014-II | harvest



630005-II | green mountain



630013-II | wheat sheaf

flotex® journeys II



630015-II | lilac



630016-II | spa



630017-II | russet



630018-II | haystack



630016-II | spa



630018-II | haystack

630017-II | russet

TECHNICAL SPECIFICATIONS

ENGLISH

APPLICATIONS

senior living, long-term care facilities, waiting rooms, offices, outpatient clinics, locker rooms, dining areas, health clubs, airports, classrooms, administrative areas, daycares, library, dorms

PHYSICAL CHARACTERISTICS (Sheet)

(dimensions are approximate)

Gauge 0.17" (4.3 mm)
Width 79" (2 meters)
Length 98.4' (30 meters)
Roll Size 71.76 yards² (60 meters²)
Wear layer density approx. 46,000/pulgada²

TECHNICAL DATA

Durability/Appearance Retention:

Wear layer composition nylon type 6.6
EN1307 (wear class) 4 (heavy duty)
Wira Abrasion test achieves > 60,000 cycles
EN 985 Castor Chair test suitable for continuous use under castors
ISO 3416-86 achieves 95% recovery in 24 hours/100% in one week

Fire Testing:

ASTM E 648/NFPA 253 (Critical Radiant Flux) Class 1
ASTM E 662/NFPA 258 (Smoke Density) 450 or less
ASTM D 2859 (Surface Flammability of Carpet & Rugs/ Pill Test) Pass
CAN/ULC S102.2 (Canadian Fire Test):
..... FSR-245: SDC-105 (Sheet)

Sound Reduction:

ASTM E 492 IIC 57 (SHEET)
Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor/Ceiling Assemblies using the Tapping Machine
ISO 354 Sound Absorption Noise Reduction Coefficient = 0.10
Sheet: 20dB when tested in accordance with ISO 140-8

Slip Resistance

Meets or exceeds the industry recommendation of >0.5 for flat surfaces when tested in accordance with ASTM D 2047, Standard Test Method for Static Coefficient of Friction. Suitable for use on flat or inclined surfaces.

Electrical Properties:

ISO 6356 Static Propensity 0.1 Kv
ISO 10965 Vertical Resistance > 10⁹ ohms

LEED®: Flotex® contributes to LEED® credits, please visit www.forboflooringNA.com for more information.

ESPAÑOL

APLICACIONES

asilos, áreas de atención a largo plazo, salas de espera, oficinas, ambulatorios, vestidores, comedores, clubes de salud, aeropuertos, salones de clase, áreas administrativas, guarderías, biblioteca, dormitorios

CARACTERÍSTICAS FÍSICAS (HOJA)

(las dimensiones son aproximadas)

Espesor 0.17" (4.3 mm)
Ancho 79" (2 metros)
Largo 98.4' (30 metros)
Tamaño del rollo 71.76 yards² (60 metros²)
Densidad de la capa de desgaste approx. 46,000/pulgada²

DATOS TÉCNICOS

Durabilidad/apariencia de retención:

Composición de la capa de desgaste nylon tipo 6.6
EN1307 (clase de desgaste) 4 (trabajo pesado)
Wira Prueba a la abrasión resiste > 60,000 ciclos
EN 985 Prueba de la silla con ruedas adecuado para el uso continuo con ruedas
ISO 3416-86 logra 95% de recuperación en 24 hrs/100% en una semana

Prueba de Fuego:

ASTM E 648/NFPA 253 (Flujo Radiante Crítico) Clase 1
ASTM E 662/NFPA 258 (Densidad de Humo) 450 o menos
ASTM D 2859 Prueba de la Píldora Pasa
CAN/ULC S102.2 (Prueba de fuego de Canadá):
..... FSR-245: SDC-105 (Sheet)

Reducción de Sonido:

ASTM E 492 IIC 57 (HOJA)
Método de prueba Estándar Laboratorio de medición de impacto A través de la transmisión de sonido
Piso/techo, utilizando la máquina de Tapp
ISO 354 Absorción de Sonido Coeficiente de reducción de ruido = 0.10
Hoja: 20dB cuando es probado de acuerdo a la ISO 140-8

Resistencia a Derrape:

Cumple o excede la recomendación de la industria de >0.5 para superficies planas cuando se prueba de acuerdo con ASTM D 2047, Método de prueba estándar para el coeficiente estático de fricción.
Adecuado para su uso en superficies planas o inclinadas.

Propiedades Eléctricas:

ISO 6356 Propensión de estática 0.1 Kv
ISO 10965 Resistencia Vertical > 10⁹ ohms

LEED®: Flotex® contribuye a créditos LEED®, por favor visite www.forboflooringNA.com para más información

FRANÇAIS

APPLICATIONS

centre pour personnes âgées, centre de soins prolongé, salle d'attente, bureau, Clinique médicale, vestiaires, salles à manger, centre sportif, aéroports, salle de classe, espace administratif, garderies, bibliothèque, dortoirs

CARACTÉRISTIQUES PHYSIQUES (FEUILLE)

Calibre 0.17" approx. (4.3 mm)
Largeur 79" (2 mètres)
Longueur 98.4' (30 mètres)
Dimensions du rouleau 71.76 yards² (60 mètres)
Densité de la couche d'usure approx. 46,000/pouce²

INFORMATIONS TECHNIQUES

Durabilité/rétention de l'apparence:

Composition de la surface d'usure nylon type 6.6
EN1307 (classe d'usure) 4 (trafic lourd)
Test d'abrasion Wira >60 000 cycles
EN985 résistance aux roulettes appropriés pour utilisation continue sous chaise à roulettes
ISO 3416-86 atteints 95 % de récupération en 24 h/100 % en une semaine

Résistance Feu/Fumée:

ASTM-E 648/NFPA 253
(Fluctuation radiance critique) Classe 1
ASTM E-662/NFPA 258
(densité de la fumée) 450 ou moins
ASTM D 2859 Test bouloche réussit
CAN/ULC S102.2 (Test canadien d'incendie):
..... FSR-245: SDC-105 (Sheet)

Affaiblissement acoustique:

ASTM E 492 IIC 57 (FEUILLE)
Méthode de test standard pour Transmission du son du plancher/plafond
ISO 354 Absorption du son coefficient de réduction du son = 0.10
Feuille: 20 dB éprouvé selon ISO 140-8

Résistance au glissement:

Rencontre ou excède les normes de l'industrie de >0.5 pour les surfaces planes lorsque testées selon la norme ASTM D 2047, Méthode d'essai standard pour le coefficient de frottement statique.
Convient pour une utilisation sur des surfaces plates ou inclinées.

Propriété statique:

ISO 6356 Propension Statique 0.1 kV
ISO 10965 Résistance verticale > 10⁹ ohms

LEED®: Flotex® contribue à des crédits LEED®, s'il vous plaît visitez www.forboflooringNA.com pour plus d'informations.



Forbo Flooring Systems

visit us online: www.forboflooringNA.com | email: info.na@forbo.com

North American Headquarters: 8 Maplewood Drive, Humboldt Industrial Park, Hazleton, PA 18202 | ph: 1-800-842-7839 / 570-459-0771 | fax: 570-450-0258

Canadian Office: 3983 Nashua Drive, Unit 1, Mississauga, ON L4V 1P3 | ph: 1-800-268-8108 / 416-745-4200 | fax: 1-877-893-4680 / 416-745-4211



done with your samples?
let us recycle them for you
call 1-800-842-7839 for info

FSC logo here



FLOORING SYSTEMS

creating better environments

Item#235822 V1