


Technical specifications

Nuway flameguard

	Nuway flameguard
Maximum length per module	2500mm
Maximum width per module	750mm
Maximum weight per module	23kg/m ²
Depth	12mm
Scraper bar material	Aluminium
Construction	Closed
Number of wiper strips	1
Total weight (kg/m ²)	17
Max static load (kg/cm ²)	900
Dynamic load (kg) 2 wheels 80mm, 20,000 passes	350
Fire behaviour EN13501-1	Meets LUL standard: ST/Su/S Station/Surface/Supine London Underground Ltd Engineering Standard 2-01001-002 Issue A1
Ramp frame model	ARF 50
Manufacturing method	Entrance flooring system with scraper bars and rubber wiper strips
Wiper designs	Plain
Wiper material	VAMAC Rubber

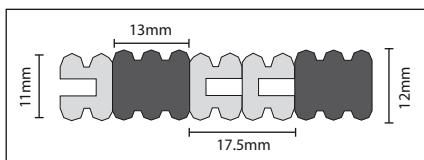

12mm Single closed



Nuway was the very first entrance matting brand to receive Building Research Establishment (BRE) certification and Forbo, at the time of press, is still the only manufacturer to offer BRE accredited products in this sector.