

Technical specifications

Nuway cable with Coral classic

Accessory	None				3-row bristle		Bristle	Scraper
Depth to height of aluminium (mm)	10	17	22	22MD	17	22	22	22
Depth to height of insert (mm)	13	20	25	25MD	20	25	25	
Weight (kg/m²)	9	10	12	16	12	14	14	15
Max width per module (mm)	2500	3000			3000		3000	3000
Max depth per module (mm)	Relates to weight				Relates to weight			Relates to weight
Max weight per module (kg)	23				23			23
Distance between profiles (mm)	5				5		5	5
Construction	Open				Open		Open	Open
Dynamic load (kN) DIN 1072: 200 x 260mm = 520cm²	10	20	20	40	20		20	20
Fire behaviour EN13501-1	B _f s1							
Frame	13 x 20 x 3	20 x 20 x 3	25 x 20 x 3	25 x 20 x 3	20 x 20 x 3	25 x 20 x 3	25 x 20 x 3	25 x 20 x 3
Ramp frame	11 x 49 x 2	18 x 70 x 3			18 x 70 x 3			
Manufacturing method	Entrance Flooring System made from aluminium carriers with PA tufted inserts. Connected with cables				Entrance Flooring System made from aluminium carriers with PA tufted inserts and PA bristles. Connected with cables			Entrance Flooring System made from aluminium carriers with PA tufted inserts and PA bristles. Connected with cables
Wiper designs	Coral clean-off system				Coral clean-off + 3-row bristles		Coral clean-off + 1-row bristles	Coral clean-off system + scraper
Wiper material	100% polyamide BCF				Textile and bristles: 100% polyamide BCF			Textile: 100% polyamide Scraper: Aluminium

Nuway Cable with rubber

Accessory	None				3-row bristle		Bristle	Scraper
Depth to height of aluminium (mm)	10	17	22	22HD	17	22	22	22
Depth to height of insert (mm)	13	20	25	25HD	20	25	25	
Weight (kg/m²)	14	15	17	21	14	16	16	16
Max width per module (mm)	2500	3000			3000		3000	3000
Max depth per module (mm)	Relates to weight				Relates to weight			Relates to weight
Max weight per module (kg)	23				23			23
Distance between profiles (mm)	5				5		5	5
Construction	Open				Open		Open	Open
Dynamic load (kN) DIN 1072: 200 x 260mm = 520cm²	10	20	20	40	20		20	20
Fire behaviour EN13501-1								
Frame	13 x 20 x 3	20 x 20 x 3	25 x 20 x 3	25 x 20 x 3	20 x 20 x 3	25 x 20 x 3	25 x 20 x 3	25 x 20 x 3
Ramp frame	11 x 49 x 2	18 x 70 x 3			18 x 70 x 3			
Manufacturing method	Entrance Flooring System made from aluminium carriers with PA tufted inserts. Connected with cables				Entrance Flooring System made from aluminium carriers with PA tufted inserts and PA bristles. Connected with cables			Entrance Flooring System made from aluminium carriers with rubber inserts and alu scraper. Connected with cables
Wiper designs	Rubber				Rubber + 3-row bristles		Rubber + 1-row bristles	EPDM + scraper
Wiper material	Rubber: 100% EPDM				Rubber: 100% EPDM Bristles: 100% polyamide BCF			Rubber: 100% EPDM Scraper: Aluminium


Technical specifications

Nuway cable with 3-row bristle


Accessory	None		Scraper
Depth to height of aluminium (mm)	17	22	22
Depth to height of insert (mm)	20	25	22
Weight (kg/m ²)	14	16	16
Max width per module (mm)	3000	3000	3000
Max depth per module (mm)	Relates to the weight	Relates to the weight	Relates to the weight
Max weight per module (kg)	23	23	23
Distance between profiles (mm)	5	5	5
Construction	Open	Open	Open
Dynamic load (kN) DIN 1072: 200 x 260mm = 520cm ²	20	20	20
Static load (kg/sqcm)	100	100	100
Fire behaviour EN ISO 9239-1			
Frame	20 x 20 x 3	25 x 20 x 3	25 x 20 x 3
Ramp frame	18 x 70 x 3		
Manufacturing method	Entrance Flooring System made from aluminium carriers with PA bristles. Connected with cables		Entrance Flooring System made from aluminium carriers with PA bristles and aluminium scraper. Connected with cables
Wiper designs	3-row bristles	3-row bristles	3-row bristles + scraper
Wiper material	100% polyamide	100% polyamide	Bristles: 100% polyamide Scraper: Aluminium

Main dimensions shown in mm


Nuway cable with textile insert

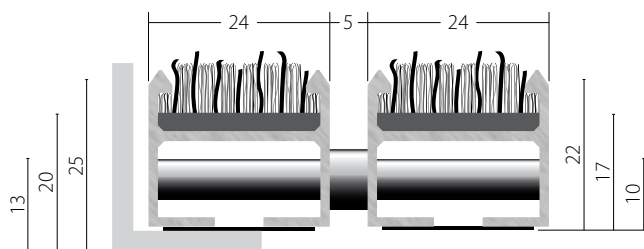

Nuway cable with rubber insert

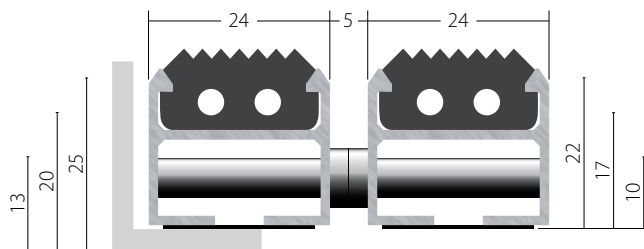

Nuway cable with bristle insert

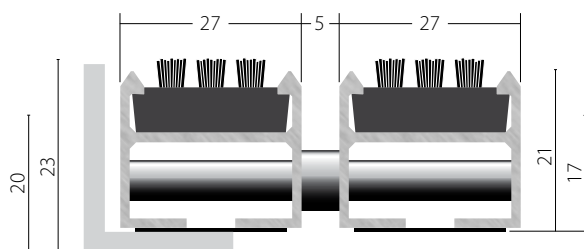

Nuway enquiries:

Tel: 01773 740 688

Fax: 01773 740 640

Email: info.flooring.uk@forbo.com

www.forbo-flooring.co.uk

Samples:

Tel: 0800 731 2369

Registered office:

Forbo Flooring UK Limited

Den Road, Kirkcaldy

Fife KY1 2ER

Registered in Scotland: No 41400



forbo

FLOORING SYSTEMS

creating better environments