

# A NATURAL CLICK

**marmoleum®** *click*

creating better environments



FLOORING SYSTEMS

# NATURAL INGREDIENTS

Each Marmoleum Click panel is made of water repelling High Density Fibre-board with a sound absorbing cork backing and 2.5mm Marmoleum on top. Due to the natural ingredients it is a good choice both for you and for the environment. Marmoleum Click improves life for people with asthma as Marmoleum is one of only two floor coverings approved by Allergy UK. Not only is it comfortable underfoot, it is also anti-static and its proven bacteriostatic properties inhibit the breeding of harmful bacteria as well. Last but definitely not least: due to the natural ingredients the floor looks and feels natural.

**marmoleum®click**  
A natural click




633866 eternity – 633702 liquid clay



*Great combinations*  
by **marmoleum®click**



333251 lemon zest – 633701 moon – 633707 black hole – 633860 silver shadow



333251 - 633701 - 633707 - 633860



333251 - 633701 - 633707 - 633860



333360 - 333355 - 333358


# EVERY STYLE AND EVERYWHERE

Available in 23 colours ranging from soothing neutrals to vibrant bolds, Marmoleum Click makes it possible to create inviting personal spaces that are unique to your home and lifestyle. There are three panel sizes ranging from the larger 90 x 30 cm to the 60 x 30 cm and the square 30 x 30 cm. All colours and sizes are mutually compatible. So choosing the colours is just the starting point, after that you can play with the different sizes to create your ultimate floor design!


**marmoleum®click**  
A natural click



933573 traces of nature – 633702 liquid clay



933573 - 633702



935216 - 935217 - 333363



333358 petrol – 633568 delta lace

Easy to live in  
by **marmoleum®click**



# NOT ONLY IN YOUR DREAMS...

Marmoleum Click with its strong protective Topshield™ finish, is extremely durable and simple to care for. The smooth surface is easy to clean – a dry-cloth sweeper for dust and a neutral cleaner and damp cloth for any spots will do the job – and its beautiful colours will not fade over time. Marmoleum Click's anti-static properties repel dust and dirt and contribute to a better indoor environment and air quality. Because Marmoleum is a natural product, it reaches room temperature quickly, ensuring your house is snug and warm. Marmoleum Click can even be used with underfloor heating.

**marmoleum®click**  
A natural click





333363 lilac – 333702 liquid clay




*Warm feelings*  
by **marmoleum®click**

333866 eternity – 333355 rosemary green – 333885 spring buds – 333360 vintage blue



333866 - 333355 - 333885 - 333360



333858 - 333363 - 333860 - 333360



333358 - 333885 - 333360


# A PROFESSIONAL CLICK

It is quick and easy to install Marmoleum Click. There is no need to mess around with glue or waiting times. Lay it, walk on it. The direct benefit is that it reduces installation costs significantly. Marmoleum Click is very strong and robust with a total thickness of 9.8 mm. The 2.5 mm thick Marmoleum on top is so durable that it stays looking good, even in challenging areas. In fact the floor is so durable you can even take it with you when you move to a new home.


**marmoleum®click**  
A natural click



333355 rosemary green



333355



333723 - 333724 - 333131



333251 - 333701 - 333724 - 333723



Totally my style  
by **marmoleum®click**

633724 orbit - 633723 nebula



# THE CLICK WITH NATURE

marmoleum®click  
A natural click



Marmoleum Click is a flooring product made primarily from renewable natural resources. The top layer is Marmoleum, a bio-based, ecologically produced material made from 97% natural raw materials, 72% of which are rapidly renewable, like flax (linseed) and wood flour, along with 43% recycled content.

- The main ingredient in Marmoleum is **linseed oil**, produced by pressing the seeds of the flax plant. The flax plant is an easy-to-cultivate species delivering annual crops of linseed as well as fibres for the textile industry.

- **Pine rosins** are mixed with the vegetable oil pressed from the linseed to produce a flexible binder. The pine trees from which the rosins are extracted come from controlled forestry locations throughout the world.

- **Wood flour** is a waste product of the timber industry. Low grade wood such as roots and branches are finely ground and used in Marmoleum. No tropical hardwoods are ever used.

- When it comes to our beautiful colours, only **ecologically friendly pigments** are used.



- The backing for Marmoleum is made from spun yarn of strong **jute** fibre. Jute is plentiful and highly renewable.



## COMMITTED TO THE HEALTH OF ONE

As our floors are part of your environment and most of our time at home is spent indoors, it is our ambition to make a positive contribution to your health and wellbeing. Therefore we consciously develop our products to be a safe solution that is non-toxic and low emitting and safe to walk on. In addition our floors take care of a hygienic environment as they are dust and dirt repellent and easy to clean. Finally we aim for our floors to contribute to your sense of wellbeing, by providing comfortable floors that are available in a wide range of colours and design options that match your personal style. You can read more on our Committed to the health of one programme on: [www.forbo-flooring.co.uk/CHO](http://www.forbo-flooring.co.uk/CHO)



Fun to design,  
easy to install  
by **marmoleum**® click


## MORE INFORMATION

### MAKING THE CLICK IS EASY

Marmoleum Click is quick and easy to install. Simply slot it together with a special tongue & groove locking system and literally click the panels into place. It can be installed one tile at a time. Because Marmoleum Click panels are wide and leave no seams when connected, it's easy to get a nice smooth finish in no time. The Vålinge 5G locking system provides a secure, glueless installation. Lay it, walk on it.

Of course, your Marmoleum Click retailer can also fit your floor, if you prefer. You can achieve enhanced sound reduction properties of 21dB by installing Marmoleum Click over a Forbo foam underlay, helping to keep noise levels to a minimum.


A complete installation guide is included with each box of Marmoleum Click panels. You can also find the installation instructions on our website: [www.forbo-flooring.co.uk](http://www.forbo-flooring.co.uk)

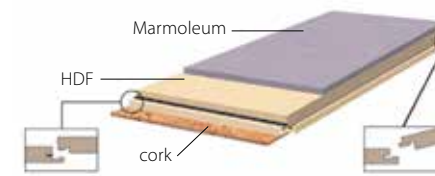

- Marmoleum Click 30 x 30 cm squares are supplied in boxes of 7 squares – approx 0.63 square metres.

- Marmoleum Click 60 x 30 cm panels are supplied in boxes of 7 panels – approx 1.26 square metres.

- Marmoleum Click 90 x 30 cm panels are supplied in boxes of 7 panels – approx 1.89 square metres.

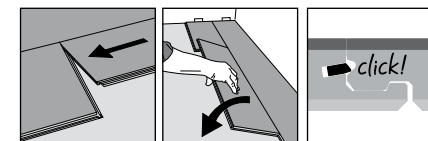

Marmoleum Click can be installed over every type of surface. The only time extra preparation is needed is if the floor or underlay is very uneven (differences of 2 mm or more).

### WHERE TO BUY

Marmoleum Click is available from leading retailers. For details of your local supplier, please visit the For My Home section at [www.forbo-flooring.co.uk](http://www.forbo-flooring.co.uk). They can give you expert advice, a detailed quotation and information on installing your floor. For the address of your nearest supplier, please check out 'where to buy' on line. All the latest Marmoleum collections can also be viewed online. Go to [www.forbo-flooring.co.uk/marmoleumclick](http://www.forbo-flooring.co.uk/marmoleumclick) to view colour samples, ideas on combinations and more!

















23 COLOURS

marmoleum®click  
Create it with linoleum








TECHNICAL SPECIFICATIONS

Marmoleum Click meets the requirements of EN 14085

	Marmoleum Click	
 Total thickness	EN-ISO 24346	9.8 mm
 Nominal thickness Marmoleum	EN-ISO 24346	2.5 mm
Locking system	5G	
 Domestic: heavy	EN-ISO 10874	Class 23
 Commercial: heavy	EN-ISO 10874	Class 33
 Tile/panel size	EN ISO 24341	30 x 30 cm 60 x 30 cm 90 x 30 cm
 Residual indentation	EN-ISO 24343-1	≤ 0.15 mm
 Castor chair resistance	EN 425	Suitable for office chairs with castors.
 Light fastness	EN-ISO 105-B02	Method 3: blue scale minimum 6.
 Resistance to chemicals	EN-ISO 26987	Resistant to diluted acids, oils, fats and to conventional solvents. Not resistant to prolonged exposure to alkalis.
 Bacteriostatic properties	Marmoleum has natural bacteriostatic properties, which are confirmed by independent laboratories, even against the bacteria MRSA.	
 Cigarette resistance	EN 1399	Marks left on linoleum as a result of stubbed-out cigarettes can be removed.
 Slip resistance	DIN 51130	R9
 Acoustical impact sound reduction	EN ISO 717-2	> 17 dB ≥ 21 dB (installed on Forbo foam)
 Life Cycle Assessment	LCA is the foundation for securing the lowest environmental impact.	

Marmoleum Click meets the requirements of EN 14041

 Reaction to fire	EN 13501-1	C <sub>fl</sub> - s1
 Formaldehyde emission	EN ISO 717-1	E1
 Slip resistance	EN 13893	DS: ≥ 0.30
 Body voltage	EN 1815	< 2 kV
 Thermal conductivity	EN 12524	0.15 W/m-K

All Forbo Flooring Systems' sales organisations worldwide have a certified Quality Management System in accordance with ISO 9001.  
All Forbo Flooring Systems' manufacturing operations have a certified Environmental Management System in accordance with ISO 14001.  
The Life Cycle Assessment (LCA) of Forbo Flooring Systems' products is documented in individual Environmental Product Declarations (EPD's) which can be found on all of our websites.





Forbo Flooring Systems is part of the Forbo Group, a global leader in flooring and movement systems, and offers a full range of flooring products for both commercial and residential markets. High quality linoleum, vinyl, textile, flocked and entrance flooring products combine functionality, colour and design, offering you total flooring solutions for any environment.



#### **UK**

Forbo Flooring UK Limited  
High Holborn Road  
Ripley  
Derbyshire DE5 3NT

#### **London EC1 showroom**

79 St John Street, Clerkenwell  
London EC1M 4NR  
Tel: 0207 553 9300

#### **For commercial enquiries:**

If calling from the North,  
London & South East  
Tel: 0800 0282 162  
Fax: 01772 646 912  
[bcs.flooring.uk@forbo.com](mailto:bcs.flooring.uk@forbo.com)

If calling from Scotland,  
Midlands & South West  
Tel: 0800 0935 258  
Fax: 01592 643 999  
[kcs.flooring.uk@forbo.com](mailto:kcs.flooring.uk@forbo.com)

#### **Nuway enquiries:**

Tel: 01773 740 688  
Fax: 01773 740 640  
[efs.flooring.uk@forbo.com](mailto:efs.flooring.uk@forbo.com)

#### **Residential enquiries:**

Tel: 0800 0935 846  
Fax: 01592 643 999  
[krccs.flooring.uk@forbo.com](mailto:krccs.flooring.uk@forbo.com)  
[www.forbo-flooring.co.uk](http://www.forbo-flooring.co.uk)

#### **Sample orders:**

**Tel: 0800 731 2369**  
**Fax: 0843 319 1831**  
[samples.uk@forbo.com](mailto:samples.uk@forbo.com)

#### **Ireland**

Forbo Ireland Ltd  
2 Deansgrange Business Park  
Blackrock  
Co Dublin

Tel: 00353 1 2898 898  
Fax: 00353 1 2898 177  
[info.ireland@forbo.com](mailto:info.ireland@forbo.com)  
[www.forbo-flooring.ie](http://www.forbo-flooring.ie)

#### **Other countries**

Forbo Flooring B.V.  
P.O. Box 13  
1560 AA Krommenie  
The Netherlands

Tel: +31 75 647 74 77  
Fax: +31 75 647 77 01  
E-mail: [contact@forbo.com](mailto:contact@forbo.com)  
[www.forbo-flooring.com](http://www.forbo-flooring.com)

#### **Registered office:**

Forbo Flooring UK Limited  
High Holborn Road  
Ripley  
Derbyshire DE5 3NT  
Registered in England 9200318



FLOORING SYSTEMS

creating better environments