


# novilux<sup>®</sup>

4 a class of its own

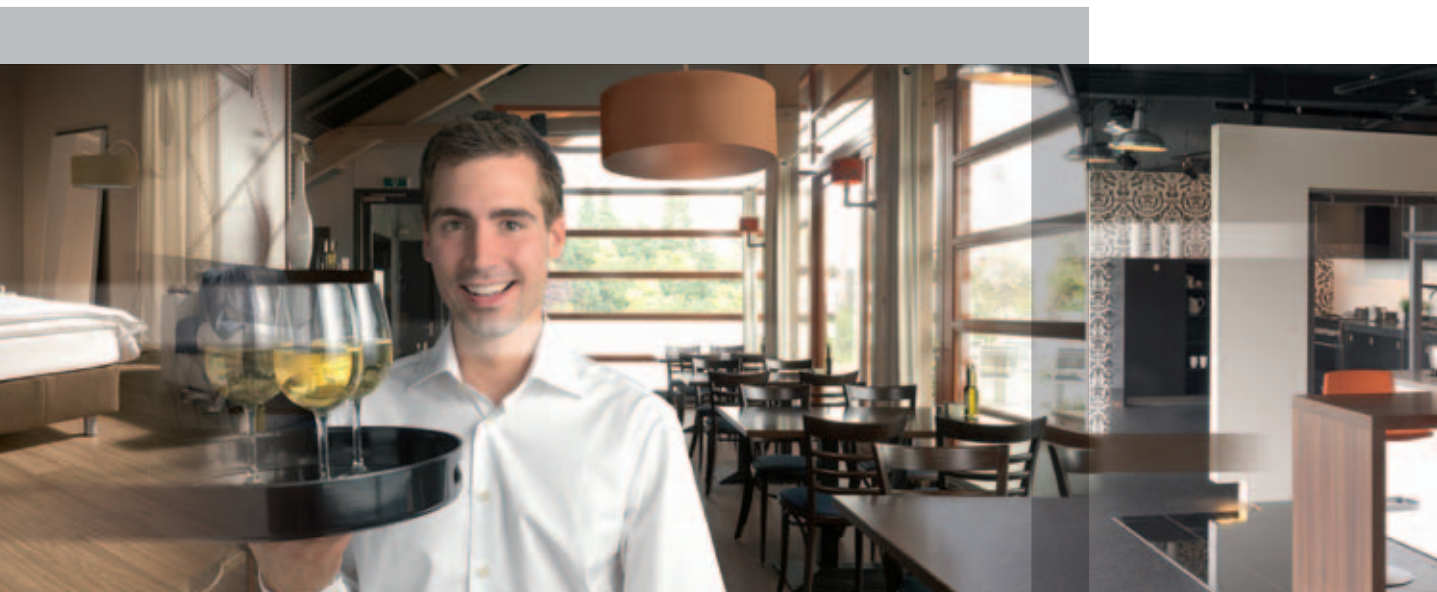

# The product

Novilux products are especially designed for new and refurbishment pro-grammes in retail, office, health and care or any other demanding locations, including domestic areas, where a high performance floorcovering is required. Novilux is particularly suitable for locations where hygiene is very important and for people with dust related allergies. All products, in particular the Traffic series, have positive ergonomic characteristics, relieving pressure of the spinal column, which in turn can prevent back problems associated with long periods of standing or walking. It makes people feel less tired. All Forbo Novilux products are produced in an environmentally friendly way and have a long life span. The production of Forbo Novilux products conforms to the strict criteria of the ISO 14001 environmental management system. Forbo-Novilon B.V. was the first manufacturer of floorcoverings in the world to be tested and certified for this environmental management system.

## Installation

The usual requirements for a sub floor are valid. It must be level, sound, rigid, clean and permanently dry. For domestic use Novilux can be loose-laid in an area of up to 20 square metres. All Novilux ranges come in 2 and 4 metre, which makes laying quick and efficient. When installing multiple widths of Novilux Compacta, Traffic and Design, alternate widths should be reverse-laid to avoid shade variation between widths. Please ensure your Novilux floor is installed in a professional way, following the instructions that come with a product of this nature.

## Cleaning and maintenance

Forbo Novilux products have a strong protective finish that makes cleaning and maintenance very simple indeed. All products can be cleaned with the same simple method: In normal use sweep or vacuum the floor to remove loose dirt and grit. Wash regularly afterwards with Forbo Monel and water (50 ml/10 l water) to remove spots and clean the floor. For periodical cleaning, also apply Monel film using Forbo Monel solution (250 ml/5 l water) and mop. Allow floor to dry. This method greatly reduces effort and time spent on keeping your floor in shape.



Forbo Flooring B.V.  
Postbus 13  
1560 AA Krommenie  
T: 075 647 78 80  
F: 075 628 37 71  
contact@forbo.com  
www.forbo-flooring.com

The quality and environmental management system of Forbo - Novilon B.V. (NL) where Novilux is manufactured, is certified in accordance with ISO 9001 and ISO 14001.

