



**KLEBSTOFF**  
ADHESIVE

**PFLEGE-  
MITTEL**  
MAINTENANCE

**LACQUER**  
LACK

**MISCELLANEOUS**  
ZUBEHÖR

**LEVELLING  
COMPOUND**  
**SPACHTEL-  
MASSE**

**GRUNDIERUNG**  
PRIMER

**SURFACE**

# PRODUCT PORTFOLIO

FLOORING & PARQUET INSTALLATION

the strong connection

**eurocol**

# CONTACTS

## Forbo Eurocol Deutschland GmbH

August-Röbling-Str. 2 • D-99091 Erfurt  
Phone: + 49 (0)361 73041 - 0 • Fax: + 49 (0)361 73041 - 91  
info.erfurt@forbo.com • www.forbo-eurocol.de

### Managing Director

#### Dr. Stefan Vollmuth

Mobile + 49 (0)151 - 162 680 42, stefan.vollmuth@forbo.com  
Phone: + 49 (0)361 - 73041 - 100

### Export Managers

#### Natalia Kleinknecht

Mobile: + 49 (0)172 - 365 86 70, natalia.kleinknecht@forbo.com

#### Gerhard Lipp

Mobile: + 43 (0)664 - 130 26 55, gerhard.lipp@forbo.com

#### Artur Woznica

Mobile: + 48 (0)603 - 632 486, artur.woznica@forbo.com

#### Luminita Cozma

Mobile: +40 72 363 82 42, luminita.cozma@forbo.com

### Customer Service

#### Claudia Wiegand C/O

Phone: + 49 (0)361 - 73041 61, claudia.wiegand@forbo.com

#### Susanne Köhn C/O

Phone: + 49 (0)361 - 73041 50, susanne.koehn@forbo.com

# TABLE OF CONTENTS

## FLOORING INSTALLATION

PRIMER **04 - 09**

SMOOTHING AND  
LEVELLING COMPOUNDS **10 - 18**

ADHESIVES **19 - 33**

Adhesives for PVC and/or rubber floor coverings **20 - 22**  
Adhesives for textile floor coverings **23**  
Adhesives for linoleum **24 - 25**  
Fixing agents/tackifiers **25 - 26**  
Electrically Conductive Systems **27 - 28**  
Contact- and mounting adhesives **29**  
Supplementaries floor installation **32**  
Underlay mats **33**

ARTIFICIAL TURF AND  
SPORT FLOORING SYSTEMS **34 - 36**

Artificial turf **35**  
Sport flooring systems **36**

## PARQUET INSTALLATION

PRIMER **38**

ADHESIVES FOR  
PARQUET INSTALLATION **38 - 42**

PARQUET LACQUER &  
PARQUET OIL-WAX **43 - 47**

Wood putty and primers **44**  
Parquet lacquer **45 - 46**  
Parquet oil-wax **47**

CLEANING AND MAINTENANCE **48 - 49**

CLEANING AND MAINTENANCE OF  
OILED AND WAXED PARQUET **50**

SURFACE PRODUCTS **51 - 55**

BetonDesign **52 - 53**  
C FLOOR **54 - 55**

TOOLS & MORE **56 - 58**

The product descriptions in this catalogue represent only a small sample of our available technical information.  
Please do not hesitate to ask for our full technical information and safety data sheets.

# DESCRIPTION OF SYMBOLS

## APPROVAL



General building-authority approval by the Deutsches Institut für Bautechnik (German Institute for Civil Engineering, DIBt).



Internationally, the EMICODE® is the most important and best-known system for the classification of emissions behaviour for flooring installation products, adhesives and building materials.



CE marking is a certification mark that indicates conformity with health, safety, and environmental protection standards for products sold within the European Economic Area (EEA)

## SUITABILITY



Use a required roller



Suitable for sub-floor heating systems



Suitable for indoor use



Store free from frost



Roller-caster-chair resistant



Suitable for in- and outdoor use



Fast accessibility



Pumpable



Frost resistant product



Reaction to fire Bfl-s1



Acoustic



Use a wipe or cloth



Chemical resistance



Scratch resistance



Electrically conductive

**NMP-free** Free of N-Methyl-2-Pyrrolidone




Apply with brush



Slip resistance R9



Saliva resistant



Apply with notched trowel



Class domestic normal



Class commercial general



Class commercial heavy



Class commercial very heavy



FLOOR COVERING



PARQUET



SURFACE FINISHING

Ideal applications



Two-component product



Dust reduced



IMO





# PRIMER

## 015 EUROBLOCK MS



**One-component SMP moisture blocker** | Water-free 1-component SMP moisture blocker to block residual moisture on absorbent cement-based screeds up to 4 %CM | Application in one layer | easy to apply | contains no migratory components | mixing with a hardener is eliminated, thus no hardening losses or possible mixing errors

Ready to apply, fast hardening One-component SMP moisture reaction resin primer to block non-pressing residual moisture in cement screed up to 4 %CM, for strengthening surface edge zones of mineral substrates.  
Suitable for direct bonding of parquet with Eurocol 1C adhesives.  
Prime with 070 Europrimer Fill before using self-levelling compound.



**Unit size:** 11 kg

**Shipping unit:** 60/pallet

**Consumption:** approx. 150 - 350 g/m<sup>2</sup>, (depending on the application and subfloor)

**Mode of application:** To use as a **surface stabilizer:** Nylon roller (eg. eurocol nylon fibre roller), **to use as a moisture barrier:** Notched trowel A2 (TKB)

## 021 EUROBLOCK RENO LE 2C



**Two-component damp proof coating** | damp proofing without moisture limit | water-free | very low emissions and odourless

Two-component, epoxy resin, damp proof coating to block residual moisture of concrete and cement screed. Very good subfloor penetrating properties for surface consolidation. Adhesive promoter for levelling works on mastic asphalt, ceramic tiles and wooden chip-boards. Can be mixed with 846 or 847 Europlan Sand to create spatula applicable epoxy-mortar to repair subfloors or close cracks and holes. Can also be used to cover old remaining adhesives on subfloors before applying levelling compound or adhesive. Solvent-free.



**Unit size:** 10 kg combi (A + B)

**Shipping unit:** 45/pallet

**Consumption:** 300 - 500 g/m<sup>2</sup> per coating

**Application:** roller, rubber, spatula

**Pot-life:** 30 min.

**Hardening time:** 16 - 24 hrs.

## 025 EUROBLOCK DEEP 2C



**Two-component damp proof coating** | damp proofing up to 4 CM % | water-free

Two-component, epoxy resin, damp proof coating to block residual moisture of concrete and cement screed up to 4 CM %. For the stabilization of unstable and worn screed with very good subfloor penetrating properties. For the protection of dry, moisture sensitive subfloors such as anhydrite, calcium sulphate and stone wood composites against surface water from levelling compounds or adhesives. Can be used on underfloor heating systems. Can be mixed with 846 or 847 Europlan Sand to create spatula applicable epoxy-mortar to repair subfloors or close cracks and holes. Can also be used to cover old adhesive on subfloors before applying levelling compound or adhesive. Improved bonding can be achieved before levelling works by quartz sand blinding of still wet final coat of 025 with 846 Europlan Sand (2 - 2.5 kg/m<sup>2</sup>). Solvent-free.



**Unit size:** 10 kg combi (A + B)

**Shipping unit:** 45/pallet

**Consumption:** 250 - 400 g/m<sup>2</sup> per coating

**Application:** roller, rubber, spatula

**Pot-life:** 25 min.

**Hardening time:** 16 - 24 hrs.

## PRIMER

### 026 EUROBLOCK MULTI



**One-component damp proof coating** | Eco damp proofing up to 4 CM % | one-component, no mixing with hardener | no sanding needed

Dispersion-based, one-component, damp proof coating to block residual moisture of cement-based subfloors (screed) up to 4 CM %. Moisture blocking can be completed in one day. Subsequent levelling or adhesive works can be done within 7 days after final coat application.

When laying multi-layered parquet directly with approved Eurocol MS-polymer adhesives a residual moisture of screed up to 3 CM % is possible in combination with the 026 Euroblock Multi. Solvent-free.



**Unit size:** 12 kg

**Shipping unit:** 60/pallet

**Consumption:** approx. 175 - 250 g/m<sup>2</sup> per coating

**Application:** roller

**Intermediate drying time between coatings:** approx. 20 - 60 min.

**Final drying time:** approx. 12 hrs.



### 042 EUROBLOCK TURBO



**One-component damp proof and surface reinforcement coating** | one-component, no mixing with hardener needed | fast damp proofing up to 5 CM % | water-free

Ready to use, one-component, fast drying, damp proof coating to block residual moisture of absorbent, cement-based subfloors (screed) up to 5 CM %. Very good penetrating properties. Ideal for reinforcing surfaces of absorbent cement- and calcium sulphate- (gypsum) based subfloors before levelling or adhesion works. For subsequent levelling works, quartz sand blinding of still wet coat with 846 Europlan Sand is necessary. Direct installation of multilayer parquet is possible with approved Eurocol parquet adhesive. Solvent-free.



**Unit size:** 11 kg

**Shipping unit:** 80/pallet

**Consumption:** 100 - 150 g/m<sup>2</sup> coat

**Application:** roller

**Hardening time:** min. 2 hrs. (dry, tacky free surface)



### 044-1 EUROPRIMER MULTI PLUS



**Universal primer** | dilutable concentrate | fast drying | highly water resistant | ideal before levelling works

Primer to be diluted with water for priming of absorbent and non-absorbent mineral-based subfloors, wooden composites and mastic asphalt before levelling or adhesion works. Dilution depends on subfloor type: cement screed (mixing ratio 1:2 with water), calcium sulphate (gypsum) screed, gypsum based floor boards such as Fermacel, Knauf (mixing ratio 1:1 with water). Bonding promoter before levelling works on terrazzo, ceramic, mastic asphalt and wooden composites (undiluted). Water resistant, especially for application of levelling compound in thick layers. Ensures overall equal absorbency. Fast film building and drying. Solvent-free.

For wintertime shipments, frost-resistant equivalent: 078 Eurosafe Polaris Uni



**Unit size:** 10 kg

**Shipping unit:** 60/pallet

**Consumption:** 50 - 150 g/m<sup>2</sup>

**Application:** roller

**Drying time:** depending on application, approx. 30 min - 15 hrs.



# PRIMER

## 048 EUROPRIMER PLUS

### Universal primer under levelling compound and parquet adhesives

| high end, universal | ready to use | very high water resistance | blocks plasticizer migration



High-end, ready-to-use dispersion primer for absorbent and non-absorbent cement- and calcium sulphate- (gypsum) based subfloors (screed), gypsum-based floor boards such as Fermacel, Knauf, wooden composites, stone, ceramic and mastic asphalt. Ideal before levelling works to ensure overall equal absorbency, to bind dust, and to cover old adhesive residues according to data sheet. Direct installation of wooden floors possible with recommended Eurocol Adhesive.

Solvent-free.



**Unit size:** 11.2 kg

**Shipping unit:** 60/pallet

**Consumption:** 80 - 90 g/m<sup>2</sup>

**Application:** roller, brush

**Drying time:** depending on application, approx. 60 - 120 min. Following levelling or adhesive works possible within 72 hrs.



## 050 EUROPRIMER MIX

### Dispersion primer | dilutable concentrate



Highly economical primer to be diluted with water for use on cement-based, absorbent subfloors (screed) to bind dust and ensure overall equal subfloor absorbency before levelling and adhesive works. To be diluted with water, depending on subfloor absorbency (mixing ratio up to 1 : 4-5 with water).

Solvent-free.



**Unit size:** 1 kg, 10 kg

**Shipping unit:** 384/pallet, 60/pallet

**Consumption:** 30 - 60 g/m<sup>2</sup>

**Application:** roller, brush, spray application

**Drying time:** approx. 30 min.



## 070 EUROPRIMER FILL

### Fast and filling primer | priming and filling in one step | fast drying | no quartz sand blinding necessary beforehand | levelling on damp proof coats



Ready to use, one-component, fast drying primer to prime and fill (in one step) absorbent and non-absorbent cement- and calcium sulphate- (gypsum) based subfloors (screed), stonewood screed, ceramic tiles, wooden floorboards, parquet, mastic asphalt and gypsum- based floor boards such as Fermacel, Knauf. For priming and levelling of slight irregularities and joints on ceramic tiles, planks, parquet, wooden composites, gypsum-based floor boards before levelling works. Bonding promoter before levelling works on approved epoxy damp proof coats.

Solvent-free.



**Unit size:** 15 kg

**Shipping unit:** 40/pallet

**Consumption:** 100 - 200 g/m<sup>2</sup>, depending on subfloor

**Application:** spatula, rubber slider, roller

**Drying time:** 60 - 120 min.



## 078 EUROPRIMER POLARIS UNI

### Universal primer | frost-resistant for winter transport | dilutable with water



Frost-resistant for transport (re-defrostable) primer to be diluted with water for priming of absorbent and non-absorbent substrates before levelling or adhesion works. Dilution depending on the subfloor. Fast film building and drying.



**Unit size:** 10 kg

**Shipping unit:** 60/pallet

**Consumption:** 100 - 150 g/m<sup>2</sup>, depending on subfloor

**Application:** roller, brush, spray application

**Drying time:** 0.5 - 15 hrs.



## PRODUCT OVERVIEW SUBFLOOR PREPERATION

The following table indicates which products can be used on which subfloors:

	015 EUROBLOCK MS	021 EUROBLOCK RENO LE	025 EUROBLOCK DEEP	028 EUROBLOCK RAPID	042 EUROBLOCK TURBO
Cement Screed	✓	✓	✓	✓	✓
Anhydrite screed	✓ for stabilizing	✓ for stabilizing	✓ for stabilizing	✓ for stabilizing	✓ for stabilizing
Calcium sulphate bonded levelling screed	✓ for stabilizing	✓ for stabilizing	✓ for stabilizing	✓ for stabilizing	✓ for stabilizing
Mastic asphalt		✓ as a bonding layer	✓ as a bonding layer	✓ as a bonding layer	
Magnesia screed/ stone wood		✓ as a bonding layer, moisture protection	✓ as a bonding layer, moisture protection	✓ as a bonding layer, moisture protection	✓ as a bonding layer, moisture protection
Ceramics		✓ as a bonding layer	✓ as a bonding layer	✓ as a bonding layer	
Terrazzo, stone floors		✓ as a bonding layer, degrease	✓ as a bonding layer, degrease	✓ as a bonding layer, degrease	
Chipboard V 100 E1		✓ as a bonding layer, moisture protection	✓ as a bonding layer, moisture protection	✓ as a bonding layer, moisture protection	✓ as a bonding layer, moisture protection
Gypsum bonded dry constructions	✓ for stabilizing	✓ for stabilizing	✓ for stabilizing	✓ for stabilizing	✓
Waterproof adhesive residues		✓	✓	✓	✓
Water-soluble adhesive residues		✓	✓	✓	✓
Wooden floorboards, dry, fixed concrete					✓
concrete		✓ shotblasting	✓ shotblasting	✓ shotblasting	
insulating underlay					
metals		✓ as a bonding layer, degrease	✓ as a bonding layer, degrease	✓ as a bonding layer, degrease	
OSB-Plates	✓ as a bonding layer, moisture protection	✓ as a bonding layer, moisture protection	✓ as a bonding layer, moisture protection	✓ as a bonding layer, moisture protection	✓
Primer on reactive primer					
Direct bonding 1C and 2C reactive adhesives	✓				
Direct bonding CT and intermediate priming					✓
self-levelling compounds					



## PRODUCT OVERVIEW SUBFLOOR PREPERATION

The following table indicates which products can be used on which subfloors:

	026 EUROBLOCK MULTI	044-1 EUROPRIMER MULTI PLUS	048 EUROPRIMER PLUS	050 EUROPRIMER MIX	070 EUROPRIMER FILL
Cement Screed	✓	✓ mixing ratio. 1:2	✓	✓	✓
Anhydrite screed		✓ mixing ratio. 1:1	✓		✓
Calcium sulphate bonded levelling screed		✓ mixing ratio. 1:1	✓		✓
Mastic asphalt		✓	✓		✓
Magnesia screed/ stone wood					only new screeds
Ceramics		✓ degrease	✓ degrease		✓ degrease
Terrazzo, stone floors					
Chipboard V 100 E1		✓	✓		✓
Gypsum bonded dry constructions		✓ mixing ratio. 1:1	✓		✓
Waterproof adhesive residues		✓			✓
Water-soluble adhesive residues					
Wooden floorboards, dry, fixed concrete		✓	✓		✓
concrete					
insulating underlay					
metals					
OSB-Plates		✓ without conti-finish	✓ without conti-finish		✓ without conti-finish
Primer on reactive primer					✓ with self-leveling compound
Direct bonding 1C and 2C reactive adhesives	✓ approved adhesives		✓		
Direct bonding CT and intermediate priming		✓			
self-levelling compounds		✓ mixing ratio. 1:5		✓ mixing ratio. 1:5	



# SMOOTHING AND **LEVELLING COMPOUNDS**

# SMOOTHING AND LEVELLING COMPOUNDS

## 811 EUROPLAN FIBRE



**Fibre to reinforce levelling compounds** | crack repair

Special fibre to be added to cement- and calcium sulphate- (gypsum) based levelling compounds to reinforce and to increase the load bearing capacity, stability and durability of levelling compounds, to minimize inherent tension formation during drying process, and to increase their pressure resistance. Recommended when levelling compounds are to be applied on mastic asphalt and on gypsum flooring panels. Easy to mix. Low consumption: one bag sufficient for one 25 kg sack of levelling compound.

**Unit size:** 250 g/bag

**Shipping unit:** plastic bucket with 50 bags

**Fibre length:** mix of 6 mm - 12 mm

**Application:** strew into levelling compound during mixing procedure after mixing with water

## 913 EUROPLAN SILICAT 2C



**Two-component filling compound and adhesive** | crack repair | hardens quickly | low emissions

Two component, silicate-based adhesive which can be used to bond wood, metal profiles and glass on porous substrates. Ideal for filling cracks and holes in mineral screed. Shipping unit contains 2 bags with 20 wave connectors each. Suitable on underfloor heating systems.

Supplementary products: Wave connectors, 846 Europlan sand.

**Unit size:** 2 x 0.3 l bottle (A + B)

**Shipping unit:** each 5 bottles resin + 0.3 l hardener

**Consumption:** depends on size of the crack/hole

**Processing time:** approx. 8 min.

**Resilience:** depends on application, approx. 20 min.



## WAVE CONNECTORS



Wavy metal clips to be inserted into floor-cracks before filling and closing them with recommended crack-closing compounds.

**Unit size:** 100 pieces/bag



## 900 EUROPLAN DSP

**Dispersion-based surface smoothing for deformable subfloor** | ready to use

Ready-to-use, solvent-free, spatula applicable, plasticizer resistant smoothing compound. Remains elastic and flexible after drying. Can be applied in thin layers. Ideal for surface levelling on deformable subfloors, such as granulate underlay (insulation) mats, point elastic sports floors, suspended floors, chip boards composite boards. Suitable as plasticizer migration barrier (e.g. vinyl on vinyl installation) to close joints and screw holes before installation works on wooden chip boards. Also applicable on thoroughly cleaned, used resilient floor coverings (e.g. vinyl, CV, rubber) before further subsequent installation works.

**Unit size:** 14 kg

**Shipping unit:** 44/pallet

**Consumption:** 0.3 - 1.2 kg/m<sup>2</sup>

**Accessibility:** 1 - 3 hrs.

**Ready for laying:** approx. 24 hrs.



# SMOOTHING AND LEVELLING COMPOUNDS



SURFACE FINISHING



incl.  
Hardener  
PU

## 910 EUROPLAN PU DUO 2C

**Two-component PU-based levelling compound** | self-levelling top- and underlay coat | highly durable | for indoor and dry outdoor application | grey | system component for BetonDesign

Self-flowing, flexible, highly durable hardening, two-component PU-based compound, applicable both as top coating or for levelling works before subsequent installation works. High load bearing, therefore ideal for industrial applications where high traffic is to be expected (fork-lift wheel resistant). Hardens to a hard elastic compound, therefore also ideal for deformable floor constructions such as sports floors and suspended floor installations. Ideal for levelling, thoroughly glued down old resilient and wooden floor coverings (rubber, vinyl, parquet) before subsequent works (renovation without floor replacement). For installation works on rubber-granulate underlay mats, suitable as self-levelling compound before installation of resilient floor coverings and wooden floor after fine sanding and only with recommended adhesives. Can be used to fill joints and to level mastic asphalt. Also can be used as top coat or as filling primer on mastic asphalt and also on metal sheets. Solvent-free.



**Unit size:** 9.72 kg combi (A+B)

**Shipping unit:** 52/pallet

**Consumption:** approx. 1.3 kg/m<sup>2</sup>/mm

**Processing time:** approx. 40 min.

**Hardening time:** 6-8 hrs.



PARQUET



## 920 EUROPLAN ALPHY

**High-end gypsum-based self-levelling compound** | up to 20 mm | very low-tension setting

High quality, universal, self-levelling compound very low tension for medium to high traffic. Alpha-hemihydrate-based for levelling all kinds of screed and concrete subfloors, gypsum-based floor boards such as Fermacel, Knauf. Ideal for less stable subfloors. Applicable up to 20 mm, mastic asphalt 8 mm layer thickness. To prepare subfloor for subsequent installation works. Pumpable or applicable with spike roller and notched trowel.



DIN EN 13813: CA - C25 - F7



**Unit size:** 25 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.4 kg/m<sup>2</sup>/mm

**Accessibility:** 2-3 hrs.

**Ready for laying:** at 3 mm thickness, approx. 24 hrs.

## 924 EUROPLAN HYBRID

**Self-levelling compound, tension-free curing for both calcium sulphate and cementitious subfloors. Fast drying approx 6 hrs.** | dust reduced | up to 10 mm

Fast drying, very high-quality, universal, low-tension, hybrid-based self-levelling compound with excellent final strength. For levelling in particularly critical subfloors such as waterproof, fixed adhesive residues, standard-compliant mastic asphalt, ceramic tiles, natural stone and terrazzo. Can be used with primer on new mineral subfloors and bolted wooden boards (V100 P4 - P7, OSB 2-4). Suitable for subsequent parquet and flooring work.



DIN EN 13813: CA - C50 - F10



**Unit size:** 23 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.6 kg/m<sup>2</sup>/mm

**Processing time:** approx. 30 min.

**Ready for further works:** at 3 mm thickness approx. 6 hrs.

# SMOOTHING AND LEVELLING COMPOUNDS



FLOOR COVERING



## 928 EUROPLAN WHITE

**Gypsum-based self-levelling compound** | up to 10 mm | very low-tension setting

Universal self-levelling compound, curing with low tension with medium traffic. Gypsum-based for levelling all kinds of mineral screed and concrete subfloors, gypsum-based floor boards such as Fermacel, Knauf. Ideal for less stable subfloors. Applicable 2 up to 10 mm. To prepare subfloor for subsequent installation works. Applicable with spike roller and notched trowel.



DIN EN 13813: CA - C20 - F7

**Unit size:** 25 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.5 kg/m<sup>2</sup>/mm

**Accessibility:** 3-4 hrs.

**Ready for laying:** at 3 mm thickness, approx. 24 hrs.



PARQUET



## 940 EUROPLAN QUICK

**Cement-based filling and repairing compound**

Spatula applicable, rapidly setting and high load bearing, cement-based repairing compound for filling and levelling of subfloor irregularities and holes, reparation of stairs, subfloor height compensation, ramping, mold edges, slopes, etc. Filling compound consistency and texture can be adjusted. For subsequent levelling works, it needs to be primed with 044-1, 078 or 050. Can be mixed and extended with quartz sand 846 Europlan Sand up to 30 %. Applicable up to 50 mm layer thickness.



DIN EN 13813: CT-C40-F7

**Unit size:** 25 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.5 kg/m<sup>2</sup>/mm

**Readiness for further works:** after cooling down and hardening

**Processing time:** approx. 15 min.



PARQUET



## 960 EUROPLAN SUPER

**High-end self-levelling compound and top floor in concrete look** | up to 20 mm | ideal under parquet

High quality, multi-purpose, cement-based, self-levelling compound, curing with low tension and excellent final strength for highest traffic use. For levelling of cement-based subfloors such as screed. Applicable up to 20 mm, mastic asphalt up to 5 mm layer thickness. To prepare subfloor for subsequent installation works. Pumpable or applicable with spike roller and notched trowel. Over 10 mm can be extended with up to 30 % of quartz sand 846 Europlan Sand.



DIN EN 13813: CT-C35-F10

**Unit size:** 25 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.5 kg/m<sup>2</sup>/mm

**Accessibility:** 1-2 hrs.

**Ready for laying:** at 3 mm thickness, approx. 24 hrs.





# SMOOTHING AND LEVELLING COMPOUNDS



## 967 EUROPLAN EXPRESS

**High-end self-levelling compound express** | quick walkable | quick drying | ideal under parquet | usually direct levelling without primer

Fast, easy to apply, very high-quality, universal, low-tension, cement-based self-levelling compound with excellent final strength. For levelling in particularly critical subfloors such as waterproof, fixed adhesive residues, standard-compliant mastic asphalt\*, ceramic tiles, natural stone and terrazo. Can be used without priming. Can be used with primer on new mineral subfloors and bolted wooden boards (V100 P4 – P7, OSB 2-4). Suitable for subsequent parquet and flooring work.

**Unit size:** 25 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.5 kg/m<sup>2</sup>/mm

**Accessibility:** approx. 1 hr.

**Ready for further works:** 3 mm thickness, approx. 3 - 4 hrs.



DIN EN 13813: CT-C40-F10



## 971 EUROPLAN DE RAPID

**Quick drying screed** | Ready mixture without sand | fast laying | layer thickness from 5 to 40 mm

Very high-quality, cement-based self-levelling, quickly drying screed, curing with low tension. Applicable from 5 mm to 40 mm layer thickness. To prepare subfloors like existing screed, concrete, ceramic tiles, stone floors and terrazo for subsequent installation works. Especially needed when the subfloor has to be ready for installation quickly. Indoor use and outdoor use (roof-covered areas only).

**Unit size:** 25 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.7 kg/m<sup>2</sup>/mm

**Accessibility:** approx. 2 - 3 hrs.

**Ready for further works:** 1 - 4 days



DIN EN 13813: CT-C25-F7



## 975 EUROPLAN TE/S

**Self-levelling compound** | up to 10 mm layer thickness

Cement-based, self levelling compound, curing with low tension and good final strength for medium-high traffic. For levelling cement-based subfloors (screed). Applicable up to 10 mm. To prepare the subfloor for subsequent installation works. Pumpable or applicable with spike roller and notched trowel.

**Unit size:** 25 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.5 kg/m<sup>2</sup>/mm

**Accessibility:** approx. 2 - 3 hrs.

**Ready for further works:** with 3 mm thickness, approx. 24 hrs.



DIN EN 13813: CT-C30-F7



## 977 EUROPLAN PRO

**Self-levelling compound** | ideal under parquet | excellent self-levelling | layer thickness from 1 to 10 mm

Very high quality, multi-purpose, cement-based, excellent self-levelling compound, curing with very low tension and good final strength for high traffic use. For levelling cement-based subfloors (screed). Applicable up to 10 mm, mastic asphalt up to 5 mm layer thickness. Pumpable and applicable with spike roller and notched trowel. To prepare the subfloor for subsequent installation works on elastic and parquet floor covering.

**Unit size:** 25 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.5 kg/m<sup>2</sup>/mm

**Accessibility:** approx. 2 - 3 hrs.

**Ready for further works:** with 3 mm thickness, approx. 24 hrs.



DIN EN 13813: CT-C30-F7



# SMOOTHING AND LEVELLING COMPOUNDS

## 999 EUROPLAN UNIFILL



**Self-levelling compound** | layer thickness up to 5 mm

Cement-based, self-levelling compound, curing with low tension and with good final strength for medium high traffic use. For levelling cement-based subfloors (screed). Applicable up to 5 mm in one operation. To prepare subfloor for further installation works.

Can be used also for installation of multi-layered parquet in combination with Eurocol 1-C MS polymer adhesive.



DIN EN 13813: CT-C25-F6



**Unit size:** 25 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.5 kg/m<sup>2</sup>/mm

**Accessibility:** 2-3 hrs.

**Ready for further works:** with 3 mm thickness, approx. 24 hrs.

## 991 EUROPLAN DIRECT RAPID



**Fast drying self levelling compound** | laying after 1.5 - 3 hrs. (for PVC/CV and textile flooring) | layer thickness up to 20 mm | usually direct levelling without primer | dust-reduced product

Fast curing, multi-purpose, cement-based, self levelling compound, curing with very low tension and with excellent final strength for highest traffic use.

For levelling cement-based subfloors (screed). Also usable for levelling of stone floors and ceramic tiles, for application on waterproof adhesive residues according to the data sheet. Applicable up to 20 mm, mastic asphalt up to 5 mm layer thickness.

On non-absorbent subfloors (e.g. stone floors, ceramic tiles) it can be used without primer. Installation of floor covering can be done approx. 1.5 - 3 hrs. after finishing levelling works depending on layer thickness.

To prepare the subfloor for subsequent installation works on elastic and parquet floor covering.



DIN EN 13813: CT-C40-F10



**Unit size:** 23 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.5 kg/m<sup>2</sup>/mm

**Accessibility:** approx. 1 hr.

**Ready for further works:** approx. 1.5 - 3 hrs.

## 990 EUROPLAN DIRECT



**Self levelling compound** | Easy to apply | Usually applied without primer | Very good levelling properties | Can be used as a wear layer and together with Eurocol FloorColouring | Layer thickness of 2 - 20 mm | Dust-reduced during the application

Very high-quality, universal, self-leveling, low-stress setting, cement-based self-levelling compound for extreme high traffic. For leveling specially on critical subfloors such as waterproof, fixed adhesive residues, standard mastic asphalt\*, ceramic tiles, natural stone slabs and terrazzo. Can be used without primer in most application.

With primer also applicable onto new mineral subfloors, on bolted wooden boards (V100 P4-P7, OSB 2-4).

Suitable for subsequent parquet and resilient floor covering work. Also to be combined with Eurocol FloorColouring in combination with Eurocol pigment powder and Eurocol surface finish.

Pumpable as well as applied by spatula. Can be applied from 2 - 20 mm thickness.

\*For mastic asphalt, the limit layer of thickness is 5 mm



DIN EN 13813: CT-C35-F10



**Unit size:** 23 kg

**Shipping unit:** 42/pallet

**Consumption:** approx. 1.5 kg/m<sup>2</sup>/mm

**Accessibility:** 2 - 3 hrs.

**Ready for further works:** with 3 mm thickness, approx. 24 hrs.



# floorcolouring

levelling and concrete floor finishing in one


## 390 FLOORCOLOURING

**Pigmentation powder for the creation of decorative floors.**

Is used as an additive in various quantities and mixing variants together with Eurocol smoothing compound 990 Europlan Direct. FloorColoring floors are finished with recommended Eurocol finishing lacquers, which enable their suitability for decorative interior applications such as offices, living rooms, bedrooms, hobby rooms.

**Available in the colors:**  
white, soft black and brown

**Unit size:** 0,230 kg  
**Shipping unit:** 18 cans/one carton  
**Consumption:** variable, 1 - 3 cans per bag of levelling compound

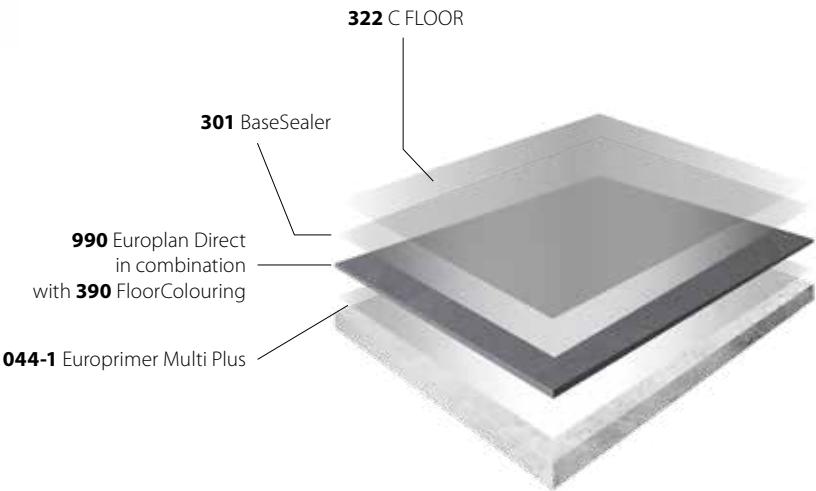

## PRODUCT OVERVIEW SUBFLOOR PREPERATION

The following table indicates which products can be used on which subfloors:

	900 EUROPLAN DSP	910 EUROPLAN PU DUO	920 EUROPLAN ALPHY	928 EUROPLAN WHITE	940 EUROPLAN QUICK	960 EUROPLAN SUPER
Cement screed	✓	✓	✓	✓	✓	✓
Anhydrite screed		✓	✓	✓	✓	✓
Calcium sulphate screed		✓	✓	✓	✓	✓
Mastic asphalt	✓	✓	✓		✓	✓
Magnesite screed / stone-wood (xylolite)	✓	✓	✓	✓	✓	✓
ceramic	✓	✓	✓	✓	✓	✓
Terrazo, stone boards	✓	✓	✓	✓	✓	✓
Chipboard V 100 E1	✓	✓	✓ screwed 811	✓ screwed 811		✓
Gypsum bonded dry constructions	✓	✓	✓ screwed 811	✓ screwed 811		✓
Waterproof adhesive residues	✓	✓				
Water-soluble adhesive residues		✓				
Concrete		✓ blocked	✓ blocked	✓ blocked	✓ blocked	✓ blocked
Insulating underlay	✓	✓				
Metal		✓ degreased				
OSB-boards without Conti-Finish	✓	✓	✓ screwed and primed, 811	✓ screwed and primed, 811		✓ screwed and primed
decoupling boards	✓	✓	✓	✓	✓	✓

## PRODUCT OVERVIEW SUBFLOOR PREPERATION

The following table indicates which products can be used on which subfloors:

	967 EUROPLAN EXPRESS	971 EUROPLAN RAPID DE	975 EUROPLAN TE/S	977 EUROPLAN PRO	990 EUROPLAN DIRECT	991 EUROPLAN DIRECT RAPID	999 EUROPLAN UNIFILL
Cement screed	✓ primed	✓	✓	✓	✓ primed	✓ primed	✓
Anhydrite screed	✓ primed	✓	✓	✓	✓ primed	✓ primed	✓
Calcium sulphate screed	✓ primed	✓	✓	✓	✓ primed	✓ primed	✓
Mastic asphalt	✓		✓	✓	✓	✓	✓
Magnesite screed / stone-wood (xylolite)			✓	✓			
ceramic (degreased)	✓	✓	✓	✓	✓	✓	✓
Terrazo, stone boards (degreased)	✓	✓	✓	✓	✓	✓	✓
Chipboard V 100 E1 (screwed)	✓	✓	✓	✓	✓	✓	
Gypsum bonded dry constructions (screwed)	✓	✓	✓	✓	✓	✓	
Waterproof adhesive residues	✓						
Water-soluble adhesive residues							
Concrete	✓ blocked	✓ blocked	✓ blocked	✓ blocked	✓ blocked	✓ blocked	✓ blocked
Insulating underlay							
Metal							
OSB-boards without Conti-Finish	✓ screwed and primed		✓ screwed and primed	✓ screwed and primed	✓ screwed and primed	✓ screwed and primed	
decoupling boards	✓		✓	✓	✓	✓	





# ADHESIVES FOR **FLOOR COVERINGS**


# ADHESIVES FOR PVC AND/OR RUBBER FLOOR COVERINGS

## 140 EUROMIX PU PRO 2C

**Two-component PU-based universal adhesive** | for high traffic flooring installation | **PVC, vinyl, rubber**



Highly durable, water- and solvent-free, two-component, PU-based adhesive for installation of floor coverings in high traffic areas. Suitable for vinyl tiles, vinyl tiles made of recycled materials and rubber tiles with sanded backing. Applicable on all types of subfloors such as cement-based (screed), cleaned metal sheets, mastic asphalt, and wooden composite boards. In case of residual moisture to be applied with Eurocol moisture blocking primer.



**Unit size:** 6.7 kg combi (A+B), 13.4 kg combi (A+B)

**Shipping unit:** 65/pallet (6.7 kg), 52/pallet (13.4 kg)

**Consumption:** 450 - 650 g/m<sup>2</sup>

**Processing time:** up to approx. 90 min.

## 522 EUROSAFE TACK

**One-sided pressure sensitive and wet set adhesive** | for installation of floor-, wall-coverings and ceiling | thermally activated bonding, contact adhesive | **PVC, vinyl**



Provides very high initial tack. Strong, dispersion-based adhesive for wet-set, one-side-pressure sensitive and contact bonding of vinyl or CV floor coverings in sheets, insulation mats on standard absorbent subfloors (wet-set bonding), and on non-absorbent subfloors like old vinyl floor coverings (one-side-pressure sensitive bonding) in combination with 900 Europlan DSP as the membrane for migration of plasticizers out of old floors. Can also be used for wall covering installation. Can be used as a contact adhesive (e.g. for heavy wall coverings, impact wall coverings in sports facilities). Can be thermally activated after drying.



**Unit size:** 13 kg, 20 kg

**Shipping unit:** 44/pallet (13 kg), 32/pallet (20 kg)

**Consumption:** 250 - 300 g/m<sup>2</sup>

**Installation time:** up to approx. 90 min.

## 528 EUROSTAR ALLROUND

**Universal adhesive** | wet-set bonding adhesive with extended installation time | **PVC, vinyl, textile**



High-quality, dispersion-based, wet-set adhesive with very good initial adhesive strength for installation of vinyl design floor coverings, LVTs, homogeneous and heterogeneous vinyl and CV-floor coverings in sheets and tiles, textile floor coverings with different backings and standard needle felt floor coverings on standard absorbent subfloors.



**Unit size:** 13 kg, 20 kg

**Shipping unit:** 44/pallet (13 kg), 32/pallet (20 kg)

**Consumption:** 250 - 300 g/m<sup>2</sup> notched trowel A2 (Vinyl/CV), 490 g/m<sup>2</sup> notched trowel B1-B2 (textile floors coverings)

**Installation time:** up to approx. 40 min.

# ADHESIVES FOR PVC AND/OR RUBBER FLOOR COVERINGS

## 425 EUROFLEX STANDARD



**Vinyl adhesive** | wet-set adhesive | frost resistant for winter shipping | **PVC, vinyl, textile**

Dispersion-based, frost resistant, wet-set adhesive with good initial adhesive strength for installation of homogeneous and heterogeneous PVC - floor coverings in sheets, CV floor coverings, textile floor coverings and standard needle felt floor coverings on standard absorbent subfloors.

**Unit size:** 13 kg, 20 kg

**Shipping unit:** 44/pallet; 32/pallet

**Consumption:** 320-480 g/m<sup>2</sup>

**Installation time:**  
up to approx. 10 - 20 min.



## 525 EUROSAFE BASIC



**Universal adhesive** | adhesive for wet bonding on absorbent sub-floors | good initial adhesion power | high bonding power


Wet-set adhesive with good initial adhesive strength for installation of homogeneous and heterogeneous PVC - floor coverings in sheets, CV floor coverings, textile floor coverings and PVC composite floor coverings with polyester fibre backing or mineral fibre backing on standard absorbent subfloors.

**Unit size:** 13 kg, 20 kg

**Shipping unit:** 44/pallet; 32/pallet

**Consumption:** approx. 300 g/m<sup>2</sup>

**Installation time:**  
approx. 20 min.



## 622 EUROSTAR TACK



**One-sided pressure sensitive and wet-set adhesive** | for installation of floor-, wall-coverings and ceiling | thermally reactive bonding | **PVC, vinyl**


High quality, strong, dispersion-based adhesive for wet-set, one-side pressure sensitive and contact installation of vinyl or CV floor coverings in sheets, insulation mats on standard absorbent subfloors (wet-set bonding), and on non-absorbent subfloors (one-side-pressure sensitive bonding). Can also be used for textile floor coverings and wall covering installation. Can be used as a contact adhesive (e.g. for heavy wall coverings, installation of floor coverings on stair steps). Can be thermally reactivated after drying. Shampoo resistant according to RAL 991 A2.

**Unit size:** 13 kg

**Shipping unit:** 44/pallet

**Consumption:** 250-300 g/m<sup>2</sup> notched trowel A1 - A2

**Installation time:** up to approx. 60 min.



## 643 EUROSTAR FIBRE



**All-in-one universal fibre-reinforced adhesive** | strong bonding | **PVC, vinyl, rubber, linoleum**



High quality, fibre-reinforced, strong, dispersion-based adhesive forming a hard adhesive ridge with multiple application properties. For wet-set installation of rubber floor coverings in sheets with sanded backing (e.g. Noraplan) as well as in tiles up to 1 m x 1 m, up to 4 mm thickness (e.g. Norament), for LVTs, vinyl and CV floor coverings in sheets and tiles, vinyl composite floor coverings, textile floor coverings with different backings, needle felt, linoleum in sheets, and in tiles (e.g. Modular) on standard absorbent subfloors.

**Unit size:** 13 kg

**Shipping unit:** 44/pallet

**Consumption:** 200-300 g/m<sup>2</sup> notched trowel A1-A2 (vinyl/CV/rubber), 450-550 g/m<sup>2</sup> notched trowel B1-B2 (textile floorings/linoleum)

**Installation time:** up to approx. 30 min.



# ADHESIVES FOR PVC AND/OR RUBBER FLOOR COVERINGS

## 644 EUROSTAR MULTI PLUS

**Fibre-reinforced wet-set adhesive** | easy to apply | lower consumption | short drying time | high performance



High quality, fibre-reinforced, strong, dispersion-based adhesive forming a hard adhesive ridge for wet-set installation of rubber floor coverings in sheets with sanded backing (e.g. Noraplan). Also for use in tiles up to 1 m x 1 m, up to 4 mm thickness (e.g. Norament), for LVTs, vinyl and CV floor coverings in sheets and tiles, and vinyl composite floor coverings, textile floor coverings with different backings, needle felt, linoleum in sheets, and in tiles (e.g. Modular) on standard absorbent subfloors.



**Unit size:** 12 kg

**Shipping unit:** 44/pallet

**Consumption:** 220 - 280 g/m<sup>2</sup> notched trowel A1-A2 (vinyl/CV/rubber), 350 g/m<sup>2</sup> notched trowel B1 (linoleum)


**Installation time:** up to approx. 40 min.

## 540 EUROSAFE SPECIAL

**Fast adhesive for bonding PVC flooring in sheets and tiles, cushion vinyl and carpet with a PVC backing.**



Very high quality adhesive wet bed adhesive with long open time and pressure sensitive adhesive, which reaches a very high final strength. The adhesive is used for bonding homogeneous and heterogeneous PVC flooring in sheets and tiles, PVC design flooring (LVT), CV flooring, textile flooring with vinyl backing, polyurethane flooring, elastomer flooring in sheets and tiles up to 4 mm thick, polyolefin flooring (Stratica) as well as approved Eurocol insulation underlays on absorbent substrates conforming to standards. Suitable for shampooing according to RAL 991 A2.



**Unit size:** 13 kg

**Shipping unit:** 44/pallet

**Consumption/Application:** 250 - 350 g/m<sup>2</sup> Trowel A1 - A2 PVC/CV/ Elastomer


**Installation time:** up to approx. 60 min.

## 640 EUROSTAR SPECIAL

**Very low emission adhesive with a high initial grab for vinyl, polyolefin and rubber floor covering.**



Very high quality adhesive wet bed adhesive with long open time and pressure sensitive adhesive, which reaches a very high final strength. The adhesive is used for bonding homogeneous and heterogeneous PVC flooring in sheets and tiles, PVC design flooring (LVT), CV flooring, textile flooring with vinyl backing, polyurethane flooring, elastomer flooring in sheets and tiles up to 4 mm thick, polyolefin flooring (Stratica) as well as approved Eurocol insulation underlays on absorbent substrates conforming to standards. Suitable for shampooing according to RAL 991 A2.



**Unit size:** 12 kg

**Shipping unit:** 44/pallet

**Consumption/Application:** 225 - 275 g/m<sup>2</sup> Trowel A1 - A2 PVC/CV/ Elastomer

**Installation time:** up to approx. 120 min.

# ADHESIVES FOR TEXTILE FLOOR COVERINGS

## 425 EUROFLEX STANDARD



**Vinyl adhesive** | wet-set adhesive | frost resistant for winter shipping | **PVC, vinyl, textile**

Dispersion-based, frost resistant, wet-set adhesive with good initial adhesive strength for installation of homogeneous and heterogeneous PVC floor coverings in sheets, CV floor coverings, textile floor coverings, and standard needle felt floor coverings on standard absorbent subfloors.

**Unit size:** 13 kg, 20 kg

**Shipping unit:** 44/pallet; 32/pallet

**Consumption:** 320-480 g/m<sup>2</sup>

**Installation time:**  
up to approx. 10 - 20 min.



## 525 EUROSAFE BASIC



**Universal adhesive** | adhesive for wet bonding on absorbent sub-floors | good initial adhesion power | high bonding power

Wet-set adhesive with good initial adhesive strength for installation of homogeneous and heterogeneous PVC-floor coverings in sheets, CV floor coverings, textile floor coverings and PVC composite floor coverings with polyester fibre backing or mineral fibre backing on standard absorbent subfloors.

**Unit size:** 13 kg, 20 kg

**Shipping unit:** 44/pallet; 32/pallet

**Consumption:** approx. 300 g/m<sup>2</sup>

**Installation time:**  
approx. 20 min.



## 501 EUROSTAR TEX PRO



**Carpet adhesive** | wet-set adhesive


Wet-set adhesive for bonding of carpet floorings with different backing types and light needle felt floorings, on standard absorbent subfloors. Shampoo resistant according to RAL 991 A2.

**Unit size:** 14 kg

**Shipping unit:** 44/pallet

**Consumption:** 450-550 g/m<sup>2</sup>

**Installation time:** up to approx. 20 min.



## 609 EUROSTAR TEX (former 509 Eurostar Tex)



**Textile adhesive** | wet-set adhesive with extended installation time | high dimension stability | very good for standard needle felt floor covering | **textile**


High quality, strong, dispersion-based adhesive with high initial bonding strength and enhanced open time for wet-set installation of textile floor coverings with different backings, needle felt floor coverings, on standard absorbent subfloors. Can also be used for bonding of vinyl composite floorings. Shampoo resistant according to RAL 991 A2.

**Unit size:** 13 kg, 20 kg

**Shipping unit:** 44/pallet (13 kg), 32/pallet (20 kg)

**Consumption:** 450-490 g/m<sup>2</sup>

**Installation time:** up to approx. 30 min.





# ADHESIVES FOR LINOLEUM

## 610 EUROSTAR LINO

**Linoleum adhesive** | wet adhesive | **Linoleum**



Dispersion-based adhesive with high initial bonding strength and enhanced open time, for wet-set installation of linoleum in sheets and corkment underlay on standard absorbent subfloors.

For wintertime shipments, frost-resistant equivalent: 418 Euroflex Lino Polaris



**Unit size:** 13 kg

**Shipping unit:** 44/pallet

**Consumption:** 450 g/m<sup>2</sup>

**Installation time:** up to approx. 15 min.

## 611 EUROSTAR LINO PLUS


**Linoleum and carpet adhesive** | 25 % less consumption | reduced water content | fast curing after laying | also on low absorbent | elastic underlays | **Linoleum, textile**



High quality, strong, resin-free, dispersion-based adhesive with high initial bonding strength and enhanced open time for wet-set installation of linoleum in sheets and tiles, corkment, sisal, needle felt and textile floor coverings with different backings, woven carpets, and vinyl composite floor coverings on standard absorbent subfloors.

Up to 25 % lower adhesive consumption than market standard products.

Shampoo resistant according to RAL 991 A2.



**Unit size:** 11 kg

**Shipping unit:** 44/pallet

**Consumption:** 230-300 g/m<sup>2</sup>


**Installation time:** up to approx. 20 min., depending on flooring

## 418 EUROFLEX LINO POLARIS

**Linoleum adhesive - frost resistant** | wet adhesive | **Linoleum, textile**



Dispersion-based adhesive with good initial bonding strength and enhanced open time for wet-set installation of linoleum in sheets and corkment underlay on standard absorbent subfloors.



**Unit size:** 14 kg

**Shipping unit:** 44/pallet

**Consumption:** 400-450 g/m<sup>2</sup>

**Installation time:** up to approx. 20 min.

# ADHESIVES FOR LINOLEUM

## 520 LINOLEUM DOCTOR

Pressure sensitive renovation adhesive to repair hollow areas under linoleum.  
Hardens fast after rubbing down the injected adhesive under the floor covering.

### Repair kit:

- 1 bottle Linoleum Doctor 0.5 l
- 2 syringes with injection needles
- 1 operating instruction



1. Drill a hole of 4 mm diameter in the middle of the bubble.



2. Inject a small amount of Eurocol Linoleum Doctor into the bubble. During injection, move the syringe circularly around the drill hole.



3. Use a hammer to spread the Linoleum Doctor fluid by gently knocking on the floor covering in one direction. Afterwards repeat in the opposite direction.



4. Excessive adhesive is easily removed with an absorbent cloth. Eurocol Linoleum Doctor is solvent-free, water-soluble, gentle to the skin and absolutely harmless to the floor covering.



5. Rub the floor covering down on the whole bubble forcefully with a hammer.



6. Warm a piece of linoleum welding rod in the matching colour. Put it into the drill hole then cut the excessive welding rod.

# FIXING AGENTS/TACKIFIERS

## 541 EUROFIX ANTI SLIP

**Anti-slip Tackifier** | also suitable for electrically conductive application

Rollable bonding dispersion which provides full area anti-slip coat after drying. For fixation and for multiple, removable installation of heavy, self-laying, form stable carpet tiles with bitumen/vinyl or PU heavy coating ( $> 4 \text{ kg/m}^2$ ) on standard absorbent or non-absorbent subfloors. For electrically conductive (EC) installation, mix 10 parts of 541 Eurofix Anti-Slip with 3,5 parts of 841 Europrimer EC. Shampoo resistant according to RAL 991 A2.



**Unit size:** 10 kg

**Shipping unit:** 44/pallet

**Consumption:** 100 - 150 g/m<sup>2</sup>

**Airing time:** approx. 60 min. until transparency



## FIXING AGENTS/TACKIFIERS

### 542 EUROFIX TACK PLUS

**Tackifier for textile and loose lay LVTs** | universal



High quality rollable coating which is permanently self-adhesive after drying. For full-area fixation and for multiple removable installation of form-stable textile and vinyl tiles with different backings. Also for removable installation of textile- and vinyl- floor coverings in sheets. Recommended for loose lay LVTs, for textile light weight tiles on standard absorbent and non-absorbent subfloors. Also for removable installation of vinyl and textile floor coverings in sheets on underlays.



**Unit size:** 10 kg

**Shipping unit:** 44/pallet

**Consumption:** 100 - 120 g/m<sup>2</sup>

**Airing time before installation:**  
approx. 20 - 40 min. until transparency

### 546 EUROFIX TACKIFIER

**Universal tackifier** | easy removable | vinyl, DIY-use



High quality rollable coating which is permanently self-adhesive after drying. For full area fixation of vinyl and CV floor coverings in sheets, tiles and textile floor coverings (also with felt backing) on absorbent and non-absorbent (also existing, cleaned, full-area glued down floor coverings) subfloors. Ideal for private use in do-it-yourself application when easy floor covering removal (e.g. for renovation) is required. Note: 891 Euroclean added to mopping water makes removal of residues from 546 easier. Ideal for private living areas and rented apartments. Suitable for fixing over underfloor heating systems and with textile floorings. It is shampoo resistant according to RAL 991 A2.



**Unit size:** 3 kg, 13 kg

**Shipping unit:** 120/pallet (3 kg),  
40/pallet (13 kg)

**Consumption:** 100 - 130 g/m<sup>2</sup>

**Airing time before installation:**  
30 - 60 min.

### 642 EUROFIX TILES

**Tackifier for textile and loose lay LVTs** | universal



High quality rollable coating which is permanently self-adhesive after drying. For full-area fixation and for multiple removable installation of form-stable textile and vinyl tiles with different backings. Also for removable installation of textile- and vinyl- floor coverings in sheets. Recommended for textile light weight tiles on standard absorbent and non-absorbent subfloors. Also for removable installation of vinyl and textile floor coverings in sheets on underlays.



**Unit size:** 10 kg

**Shipping unit:** 44/pallet

**Consumption:** 100 - 120 g/m<sup>2</sup>

**Airing time before installation:**  
20 - 40 min.

# ELECTRICALLY CONDUCTIVE SYSTEMS

## 041 EUROPRIMER EC

### Conductive dispersion primer



Ready to use, dispersion-based primer for installation of electrically conductive floor coverings on absorbent standard subfloors according to floor covering manufacturer's instructions. In combination with 801 Eurostrip EC copper tape net, it improves transverse conductivity. Pay attention to floor covering manufacturer's installation instructions!



**Unit size:** 10 kg

**Shipping unit:** 60/pallet

**Consumption:** 100-150 g/m<sup>2</sup>

**Drying time:** approx. 2 - 4 hrs.



## 801 EUROSTRIP EC

### Self-adhesive copper tape



Self-adhesive copper tape for electrically conductive preparation of standard subfloors before installation of electrically conductive floor covering according to floor covering manufacturer's instructions. Ensures transverse potential equalization according to existing standards.

**Roll length:** 20 m


**Shipping unit:** 30 rolls/carton

**Application:** self-adhesive

## SYSTEM CONSTRUCTION

### INSTALLATION OF CONDUCTIVE FLOORING

(depends on floor covering manufacturer's advices, please always pay attention to the installation advices of the manufacturer)

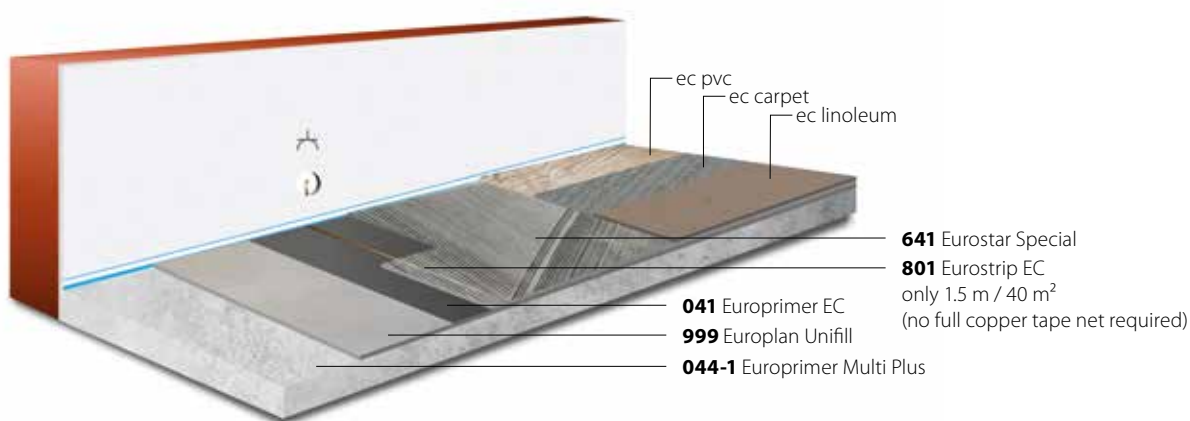

# ELECTRICALLY CONDUCTIVE SYSTEMS

## 541 EUROFIX ANTI SLIP

**Anti-slip tackifier** | also suitable for electrically conductive applications

Rollable bonding dispersion which provides full area anti-slip coat after drying. For fixation and for multiple removable installation of heavy, self-laying, form stable carpet tiles with bitumen-/vinyl- or PU-heavy coating on standard absorbent or non-absorbent subfloors. For electrically conductive (EC) installation, 10 parts of 541 Eurofix Anti-Slip must be mixed with 3.5 parts of 841 Europrimer EC. Shampoo resistant according to RAL 991 A2.



**Unit size:** 10 kg

**Shipping unit:** 44/pallet

**Consumption:** 100 - 150 g/m<sup>2</sup>

**Installation time:** approx 60 min. until transparency



## 641 EUROSTAR SPECIAL EC

**Universal adhesive, conductive** | rubber | PVC | textile

Dispersion-based, carbon-fiber containing conductive adhesive with high initial bonding strength in combination with 041 Europrimer EC and/ or Copper Tape 801 Eurostrip EC net for electrically conductive installation of floor coverings according to floor covering manufacturer's instructions. Such as electrically conductive rubber, vinyl (e.g. Colorex), textile floor coverings, needle felt on prepared absorbent standard subfloors.



**Unit size:** 12 kg

**Shipping unit:** 44/pallet

**Consumption:** 260 - 400 g/m<sup>2</sup>

**Installation time:** up to approx. 20 min., depending on floor covering

On elastomer coverings to be applied on 801 Eurostrip EC without 041 Europrimer EC.

## 523 EUROSTAR TACK EC

**Conductive adhesive for PVC and textile** | Very high-quality | light-coloured | conductive wet-set adhesive | very fast applicable | very high final strength

To be applied on electrically conductive PVC and textiles on standard absorbent subfloors which have been previously primed with 041 Europrimer EC and/or equip-ped with 801 Eurostrip EC copper tape. Shampoo resistant according to RAL 991A2.



**Unit size:** 12 kg

**Shipping unit:** 44/pallet

**Consumption:** approx. 250 - 400 g/m<sup>2</sup>

**Installation time:** approx. 10 - 15 min.



# CONTACT- AND MOUNTING ADHESIVES



## 232 EUROSOL MONTAGE

**Mounting adhesive** | fixing skirtings | joint filling glue | contains solvents

Elastically curing mounting adhesive, allows materials to be positioned for accurate alignment especially for installation of wooden or hard-vinyl skirting boards. Also used for joint sealing and installation of chip and gypsum boards, gypsum plasterboards, insulation and acoustic panels. For installation of construction boards, window seats made of plastic, natural stone or composite material. Excellent adhesion properties on concrete, wood materials, clean metal surfaces. Not for styrofoam. Hazardous material: Please check safety data sheet!



**Unit size:** 310 ml

**Shipping unit:** 12/carton, 1440/pallet

**Consumption:** 20 - 40 ml/rm

**Application:** cartridge gun

**Airing time:** up to 5 min.



## 233 EUROSOL CONTACT

**Contact adhesive** | very high immediate contact bonding power

Solvent-based, thermally reactivatable contact adhesive with very high initial contact bonding power for temperature resistant contact adhesion of a great variety of materials such as metal, glass, ceramic, plastics (ABS, PVC, Acrylic) wood, leather, hardboard, rubber etc. In floor covering installation for wooden skirting boards (rubber), stair nosings, groove profiles, floor covering. Also used for installation of homogeneous vinyl, vinyl, leather and cork floor coverings, rubber, and linoleum. Use according to floor covering manufacturer's instructions. Hazardous material: Please check safety data sheet!



**Unit size:** 0.650 kg, 5.5 kg, 10 kg

**Shipping unit:** 8/carton (650 g), 70/pallet (5.5 kg), 42/pallet (10 kg)

**Consumption:** 200 - 250 g/m<sup>2</sup>

**Application:** notched trowel A1, spatula or brush

**Airing time:** up to 5 - 10 min.

**Contact bonding time:** approx. 2 hrs.

## 650 EUROSTAR FASTCOL

**Dispersion-based contact adhesive** | very high contact bonding power

Dispersion-based, thermally reactivatable contact adhesive with high initial contact bonding power and long contact adhesion time for contact mounting of vinyl, rubber, linoleum and textile floor coverings onto stairs, stair nosings, covering up profiles and floor covering panels. Also used for installation of homogeneous vinyl, leather and cork floor coverings, rubber, and linoleum. Use according to floor covering manufacturer's instructions.



**Unit size:** 7.5 kg

**Shipping unit:** 60/pallet

**Consumption:** 200 - 300 g/m<sup>2</sup>

**Airing time:** 30 - 120 min.

**Contact bonding time:** approx. up to 4 hrs.



## PRODUCT OVERVIEW FIXING AGENTS/TACKIFIERS

	541 EUROFIX ANTI SLIP	542 EUROFIX TACK PLUS	546 EUROFIX TACKIFIER	642 EUROFIX TILES
Tufted carpet with secondary (synthetic) backing			✓	
Tufted carpet with fleece backing			✓	✓
Woven carpet				
Needle felt				
Linoleum				
Chlorine-free floor covering				
PVC in sheets/CV			✓	
PVC in tiles/LVT		✓ recommen- ded loos lay		
Elastomer/Rubber				
Insulating underlay 820/821				
Elastomer sheets and tiles up to 4 mm thick				
PU floor coverings in sheets and tiles				
form stable carpet tiles with bitumen-/vinyl or PU-heavy coating	✓			

## PRODUCT OVERVIEW ADHESIVES

425 EUROFLEX STANDARD	501 EUROSTAR TK	522 EUROSAFE TACK	525 EUROSAFE BASIC
✓	✓		
✓	✓		
✓			
✓	✓		
✓		✓	✓
		✓	✓

The following table indicates which products can be used with which type of floor covering:

528 EUROSTAR ALLROUND	540 EUROSAFE SPECIAL	609 EUROSTAR TEX	610 EUROSTAR LINO	611 EUROSTAR LINO PLUS	622 EUROSTAR TACK	640 EUROSTAR SPECIAL	643 EUROSTAR FIBRE	644 EUROSTAR MULTI PLUS	140 EUROMIX PU PRO
✓		✓	✓	✓	✓		✓	✓	
✓		✓		✓	✓		✓	✓	
		✓		✓			✓	✓	
✓		✓		✓			✓	✓	
			✓	✓ and Lino tiles			✓ and Lino tiles	✓	
	✓					✓	✓ (upon request)	✓ (upon request)	
✓	✓				✓	✓	✓	✓	
✓	✓					✓	✓	✓	✓
	✓					✓	✓	✓	✓
✓	✓		✓ corkment	✓ corkment	✓	✓	✓		
	✓					✓	✓	✓	✓ tiles
							✓	✓	

## SUPPLEMENTARIES FLOOR INSTALLATION

### 803 EUROSTRIP TRANSFER



**Fibre-reinforced dry-adhesive tape** | floor laying | floor profile, skirting mounting

Fibre-reinforced, double-sided, dry-adhesive tape that combines extra strength with long-term durability. Strong floor-laying tape also for hard-wearing floor coverings (carpet, vinyl). Also for accurate mounting of skirting boards made of wood, vinyl and rubber.

**Roll length:** 50 m

**Roll width:** 35 mm, 45 mm, 90 mm

**Shipping unit:** 32/carton (35 mm), 24/carton (45 mm), 12/carton (90 mm)

**Application:** with applicator or by hand

## UNDERLAY MATS

### 805 EUROFLOOR SARLIBASE TE



**Decoupling underlay** | decoupling from moist and/or weak subfloors

Underlay for decoupling of PVC and CV floorings, or textile floorings from moist or mechanically unstable subfloors. Provides additional step-sound insulation and good adhesion to recommended Eurocol vinyl and textile floor covering adhesives. With 1.5 mm thickness, low installation height is guaranteed. Indoor use. Fungistatic and biostatic against mould growth.




**Roll length:** 35 m

**Roll width:** 2 m

**Processing:** lay out loosely



### 810 EUROFLOOR FORCE FABRIC



**Reinforcement fabric** | for weak subfloors before levelling

Tear-resistant polyester fabric for subfloor surface reinforcement and load distribution. In particular for not sufficiently pressure resistant, unstable or deformable subfloors such as wooden boards, glued down insulation underlays, CV floor coverings and point-elastic sports floors before levelling works.


**Roll length:** 50 m

**Roll width:** 1 m

**Pallet size:** 40 rolls/pallet

**Application:** gluing down, fixing or tacking

### 813 EUROFLOOR FORCE FIBRE



**Reinforcing fabric** | bridging cracks | for weak subfloors

Special fibre-compound underlay used when levelling works are done on non-standard, weak subfloors. Laid out on the subfloor and covered with levelling compound, the fibre-compound resolves and the fibres rise up and spread evenly within the levelling compound layer. For bridging cracks, load distribution and general subfloor stabilization. Minimum coating for levelling work: 5 mm. Use spike roller for equalization.

**Roll length:** 50 m


**Roll width:** 0.97 m

**Thickness:** 0.6 mm

**Pallet size:** 28 rolls/pallet

# UNDERLAY MATS

## 820 EUROFLOOR COMFORT/ 821 EUROFLOOR COMFORT PRO



**Step-sound absorbing underlay mat** | for floor coverings and parquet

PU-cork granulate based, elastic underlay to improve step-sound insulation and/or for height adjustments in subfloor constructions in new and old buildings. Step sound improvement degree according to DIN 52210 certified with 2 mm vinyl floor covering: approx. 20 dB. with 5 mm thick mat. 821 Eurofloor Comfort Pro - same as 820 but in addition certified as Bfl/S1 in accordance with German standard DIN EN 13501-1.



**Thickness/length/width:**

**820 Eurofloor comfort:**

2 mm x 50 lfm x 1 m

3 mm x 30 lfm x 1 m

5 mm x 24 lfm x 1 m

**821 Eurofloor Comfort Pro:**

3 mm x 30 lm x 1 m

**Pallet size:** 6 rolls/pallet

**Application:** gluing down on full area by Eurocol 622 Eurostar Tack

## 823 EUROFLOOR RENO



**Base and decoupling plate** | can be levelled before installation of resilient floor coverings

Polyester fibre plate, which has to be full-area glued down with recommended reactive Eurocol adhesives on suitable subfloors to decouple the floor covering construction from weak subfloors. Can also be used for height adjustments without levelling compounds, before the installation of parquet, ceramic tiles and different floor coverings. It significantly improves step sound insulation.



**Plate size:**

4 mm = 9 m<sup>2</sup>/carton (100 x 60 cm)

9 mm = 6 m<sup>2</sup>/carton (100 x 60 cm)

**Shipping unit:**

4 mm = 15 plates/carton

9 mm = 10 plates/carton



## FORBO QUICK FIT & FOAM



**Subfloor system** | Low construction height (11 mm) | No drying or setting times | Recoverable without damaging the subfloor | Joint-free up to 100 m<sup>2</sup>

Alternative subfloor system, consisting of 2 layers of self-adhesive MDF boards, which are glued together to accommodate a resilient or textile floor covering (carpet, PVC, CV, linoleum). Can be used as a substructure on old and new subfloors (also old, fixed floor surfaces). Also useful as an interim solution with temporary reuse of the spaces/floors, e.g. exhibition stand flooring, shopfitting. When used as an in-between layer, a 0,2 mm PE film and/or Forbo Foam film should be used. Covers cracks in the subfloor, easy to install and easy to dismantle. Suitable for use with castor chair acc. to DIN EN 12529.



**Shipping unit:**

3.6 m<sup>2</sup>, 5 lower and 1 upper pallet each (120 \* 60) cm, 10 cartons / pallet

Forbo foam roll 25 m<sup>2</sup> (25 running metre)







# ARTIFICIAL TURF AND **SPORT FLOORING** SYSTEMS

# ARTIFICIAL TURF

## 149 EUROMIX TURF 2C

### Two-component PU-based artificial turf adhesive

Two-component, PU-based, green coloured adhesive for gluing artificial turf along the seams on permitted polyester fleece tape (849 Eurotape U).



**Unit size:** 12.0 kg + 1.2 kg Hardener PU

**Shipping unit:** 12.0 kg: 44/pallet  
Hardener PU: 12/Carton, 384/pallet


**Consumption:** approx. 350 g/rm

**Installation time:** approx. 50 min.

## 160 EUROMIX TURF PRO 2C

**Two-component PU-based artificial turf adhesive** | up to 20 % less consumption | also suitable for bad weather conditions | can be applied until 2 °C

Two-component PU-based, green coloured adhesive with very low consumption for gluing artificial turf along the seams on permitted polyester fleece tape (849 Eurotape U). Fast drying. Applicable also under extreme temperature conditions according to technical data sheet. Low consumption in comparison to other turf adhesives.



**Unit size:** 12.0 kg + 1.8 kg Hardener PU

**Shipping unit:** 12.0 kg: 44/pallet  
Hardener PU: 6/Carton, 300/pallet

**Consumption:** approx. 270 g/rm

**Processing time:** approx. 60 min.

## 849 EUROTape U

**849 Eurotape U** | KR-Seam Tape universal | very high tensile strength | adhesive can be applied on both sides

High quality, tear-resistant underlay polyester fleece tapes for bonding artificial turf along the seams, in combination with Eurocol artificial turf adhesives.



**Roll length/roll width:**

100 lm x 30 cm

\*other widths on request

**Pallet size:** 60 rolls/pallet

# SPORT FLOORING SYSTEMS

## 833 EUROFINISH SPORT DUO 2C

**Two-component PU-dispersion-based sport-floor lacquer** | semi-matt | suitable for sports floor coverings according to DIN 18032



Very high quality, two component, PU-based lacquer with excellent spreading properties. For extremely abrasion resistant, highly-durable top coating of new, uncoated sports floor coverings made of linoleum or parquet. Suitable for re-coating of used subfloor covering; certified according to German standard DIN 18032 in combination with sport floor maintenance 897 Euroclean Sport. Emission-tested product according to DIBt principles. Meets requirements of ÖISS guidelines concerning sliding friction and gloss level. Shipped in semi-matt.



**Unit size:** 4.3 l + 0.26 kg Hardener Aqua LE

**Shipping unit:** 4/carton, 96/pallet

**Consumption:** approx. 120 ml/m<sup>2</sup>

**Drying time:** 4 - 5 hrs.

**Pot life:** approx. 1.5 hrs.



## 863 EUROFINISH SPORT

**One-component PU-dispersion-based sport lacquer** | suitable for sports floor coverings according to DIN 18032 | semi-matt, anti-slip resistant



High quality, matt and anti-slip, one-component PU-based lacquer with good spreading properties for high abrasion resistance and durable top coating for all kinds of uncoated sports linoleum and parquet which are used for sports flooring installation. Suitable for all sports floor coverings according to German standard DIN 18032 in combination with sports floor maintenance 897 Euroclean Sport.

Deliverable in half-matt. Emission-tested product according to DIBt principles. Meets requirements of ÖISS guidelines concerning sliding friction and gloss level.



**Unit size:** 10 l

**Shipping unit:** 60/pallet

**Consumption:** 120 ml/m<sup>2</sup>

**Drying time:** 4 - 5 hrs.



## 897 EUROCLEAN SPORT

**Clean & care for sports floors** | artified for sports floors according to DIN 18032 | resistant to staining and discolouration



Self-shiny, dirt repelling polymer dispersion for initial and regular care of lacquered resilient and wooden sports floors. Dries to a slip-resistant protective coat which is resistant to staining, footstep/heel marking. Streak free drying, no polishing needed. Slip-resistant according to German standard DIN 18032. Certified for sports floors according to DIN 18032.



**Unit size:** 10 l

**Shipping unit:** 60/pallet

**Consumption:** approx. 1 l/30 m<sup>2</sup>



## 809-A EUROCOLOR GAME LINE DUO 2C

**Game line marking and full area covering**



Highly abrasion resistant, semi-elastic curing, two-component, PU-based paint with high capacity for full area, one-layer coating of permitted resilient floor covering (linoleum, vinyl, rubber and parquet floor coverings). Ideal for game line marking in sport halls. Colours: red, orange, yellow, blue, light blue, green, white and black. Contains solvents! Pay attention to the safety data sheet!

**Unit size:** 0.5 kg combi (A+B)

**Shipping unit:** 270/pallet

**Consumption:** approx. 60 rm/can with 5 cm line width

**Drying time:** approx. 2 hrs.

**Potlife:** approx 1 hr.







# PARQUET INSTALLATION

## PRIMER

### 048 EUROPRIMER PLUS

**Universal primer under levelling compound and parquet adhesives** | high end, universal | ready to use | very high water resistance | blocks plasticizer migration



High-end, ready-to-use dispersion primer for absorbent and non-absorbent cement- and calcium sulphate- (gypsum) based subfloors (screed), gypsum-based floor boards such as Fermacel, Knauf, wooden composites, stone, ceramic and mastic asphalt. Ideal before levelling works to ensure overall equal absorbency, to bind dust and to cover old adhesive residues according to data sheet. Suitable for underfloor heating systems. Direct installation of wooden floors possible with recommended Eurocol Adhesive.



**Unit size:** 11.2 kg

**Shipping unit:** 60/pallet

**Consumption:** 80 - 90 g/m<sup>2</sup>

**Application:** roller, brush

**Drying time:** depending on application, approx. 60 - 120 min. Following levelling or adhesive works possible within 72 hrs.



## ADHESIVES FOR PARQUET INSTALLATION

### 144 EUROMIX PU MULTI 2C

**Two-component PU-based parquet adhesive** | easy to spread | sanding of parquet after 24 hrs.



+ Hardener PU

Highly durable, fast curing, water- and solvent-free, two-component adhesive for laying all kinds of standard wood floors, exotic wood on absorbent and non-absorbent mineral-based subfloors, sanded mastic asphalt, wood composites and dry screeds which are permitted for parquet installation. Usable for bonding of homogeneous vinyl floor coverings in tiles (e.g. Colorex), rubber tiles with roughed backing (e.g. Norament) and natural cork tiles.

Can be used on underfloor heating systems and on recommended Eurocol underlay. Emission-tested construction product according to DIBt principles. Cleaner for non-hardened materials: 815 Euroclean Handclean. Subfloor preparation for inadequate and/or moist sub-floor: 021 Euroblock Reno LE, 025 Euroblock Deep, 042 Euroblock Turbo. Quartz sand blinding is necessary.



**Unit size:** 7 kg + 0.875 kg Hardener PU (A+B)

**Shipping unit:** 65/pallet

**Consumption/Application:**

900 - 1000 g/m<sup>2</sup> notched trowel B3

1100 - 1300 g/m<sup>2</sup> notched trowel B11 - B15

**Installation time/Pot life:**

up to approx. 40 min.



### 146 EUROMIX WOOD BASIC 2C

**2C-PUR polyurethane wood flooring adhesive** | easy to apply | excellent ridge formation for parquet laying | parquet ready for sanding after 12 hours



+ Hardener LOT

Hard tying (ISO 17178), water-free, solvent-free two-component adhesive with extended processing time, highly resilient and fast setting. Shear-resistant curing. For laying standard-compliant parquet such as strip parquet, mosaic parquet, industrial parquet (including 10 mm), standard-compliant solid floor boards, solid lamparquet products, multilayer parquet, panel parquet, and bamboo parquet according to floor covering manufacturer's instructions.

Bonding is performed on standardized cement and calcium sulphate-based screeds, poured asphalt, wood based panels and gypsum fiber boards suitable for laying parquet, Eurocol decoupling and insulating underlays (e.g. 823 Eurofloor Reno, 820/821 Eurofloor Comfort, 804 Eurofloor Reno Fleece), and on nonabsorbent subfloors (e.g. fixed and cleaned ceramic and natural stone slabs, artificial stone). Can also be used on sanded Eurocol reactive primers approved for its application.



**Unit size:** 7 kg + 0.875 kg hardener

**Shipping unit:** 65/pallet

**Consumption/Application:**

900 - 1000 g/m<sup>2</sup> notched trowel B3

1100 - 1300 g/m<sup>2</sup> notched trowel B11

**Laying time:** approx. 60 min.

**Pot life:** 60 min.



# ADHESIVES FOR PARQUET INSTALLATION

## 148 EUROMIX WOOD 2C

**Two-component adhesive** | hardens shear resistant | easy to spread  
| long installation time

Elastically hardening, highly durable, fast curing, water- and solvent-free, two-component adhesive for laying all kinds of standard wood floors, exotic wood on absorbent and non-absorbent mineral-based subfloors, sanded mastic asphalt, wood composites and dry screeds which are permitted for parquet installation. Can be used on underfloor heating systems and on recommended Eurocol underlay. Cleaner: 815 Euroclean Handclean. Subfloor preparation for inadequate and/or moist subfloor: 021 Euroblock Reno LE, 025 Euroblock Deep, 042 Euroblock Turbo. Quartz sand blinding is necessary.



**Unit size:** 9.625 kg combi (A+B)

**Shipping unit:** 52/pallet

**Consumption/Application:**

900 - 1000 g/m<sup>2</sup> notched trowel B3  
1100 - 1300 g/m<sup>2</sup> notched trowel B11 - B15

**Installation time/Pot life:**

up to approx. 75 min.



## 153 EUROWOOD LE

**One-component SMP parquet adhesive** | long installation time |  
high suction adhesion | multipurpose

Elastic, ISO 17178 compliant, water- and solvent-free parquet adhesive based on SMP. Hardens without shrinking. For installation of strip, multi-layer, and solid parquet, as well as permitted solid floor-boards up to 220 cm length  $\geq 15$  mm thickness. For edge lamella parquet with minimum thickness of 16 mm, bamboo, smoked oak, especially surface treated parquet on suitable mineral-based subfloors and wooden composites, dry screed, mastic asphalt, recommended Eurocol decoupling and insulation mats which meet the requirements of parquet installation. For high step-sound improvement. Usually no primer necessary. Easy to remove from varnished surfaces. Sanding and sealing after 48 hrs. The adhesive is characterized by a long installation time. A swimming of the parquet elements is greatly reduced by the high suction adhesion.

Cleaner for non-hardened materials: 815 Euroclean Handclean. Subfloor surface improvement, DPM of residual moisture: 021 Euroblock Reno LE, 042 Euroblock Turbo. Quartz sand blinding is necessary.



**Unit size:** 16 kg

**Shipping unit:** 33/pallet

**Consumption/Application:**

800 - 1000 g/m<sup>2</sup> notched trowel B3  
1000 - 1200 g/m<sup>2</sup> notched trowel B11 - B15

**Installation time:** approx. 60 min.

## 157 EUROWOOD MS

**One-component SMP parquet adhesive** | strong adhesive | multipurpose

Elastic, ISO 17178 compliant, water- and solvent-free parquet adhesive based on SMP, hardens without shrinking. For installation of strip, multi-layer and solid parquet, as well as permitted solid floor-boards up to 220 cm length  $\geq 15$  mm thickness. For edge lamella parquet with minimum thickness of 16 mm, bamboo, smoked oak, specially surface treated parquet on suitable mineral-based subfloors and wooden composites, dry screed, sprinkled with sand, mastic asphalt, recommended Eurocol decoupling and insulation mats which meet the requirements of parquet installation. For high step-sound improvement. Usually no primer necessary. Easy to remove from varnished surfaces. Sanding and sealing after 48 hrs. Emission-tested construction product according to DIBt principles. Cleaner for non-hardened materials: 815 Euroclean Handclean. Subfloor surface improvement, DPM of residual moisture: 021 Euroblock Reno LE, 042 Euroblock Turbo. Quartz sand blinding is necessary.



**Unit size:** 16 kg

**Shipping unit:** 33/pallet

**Consumption/Application:**

800 - 1000 g/m<sup>2</sup> notched trowel B3  
1000 - 1200 g/m<sup>2</sup> notched trowel B11 - B15

**Installation time:** approx. 30 min.



# ADHESIVES FOR PARQUET INSTALLATION

## 159 EUROWOOD PRO

**One-component SMP parquet adhesive** | special use for multi-layer parquet



Elastic, ISO 17178 compliant, water- and solvent-free parquet adhesive based on SMP, hardens without shrinking. For installation of suitable multi-layer parquet onto mineral-based subfloors and wooden composites which meet the requirements for parquet installation. For step-sound improvement, usually no primer necessary, easy to remove from varnished surfaces. Emission-tested construction product according to DIBt principles. Cleaner for non-hardened materials: 815 Euroclean Handclean. Subfloor surface improvement, DPM of residual moisture: 021 Euroblock Reno LE, 042 Euroblock Turbo. Quartz sand blinding is necessary.



**Unit size:** 16 kg

**Shipping unit:** 33/pallet

**Consumption/Application:**

900 - 1100 g/m<sup>2</sup> notched trowel B3

1000 - 1200 g/m<sup>2</sup> notched trowel B11 - B15

**Installation time:** up to approx. 20 min.




## 554 EUROSTAR PARQUET PLUS

**Universal dispersion-based adhesive** | premium quality



One-component, ready-to-use, fast hardening, shear-resistant, dispersion-based adhesive with very low water content. Used for laying permitted standard mosaic, strip, multilayer (up to 1200 mm length), massive and edge lamella parquet 22 mm on mineral-based subfloors and wooden composites which meet the requirements for parquet installation. Please consider the manufacturer's approval for dispersion-based adhesives. Emissions-tested construction product according to DIBt principles.



**Unit size:** 22 kg

**Shipping unit:** 24/pallet

**Consumption/Application:**

800 - 900 g/m<sup>2</sup> notched trowel B3

900 - 1100 g/m<sup>2</sup> notched trowel B11

**Installation time:** up to approx. 15 min.



## 150 PARQUET DOCTOR

**For repair of hollow spots under parquet**



Moisture curing, polymer-based adhesive to repair small hollow spots and gluing imperfections under glued down parquet.

**Unit size:** 750 g

**Shipping unit:** 6/carton

**Consumption:** depends on hollow spots

**Hardening time:** min. 3 hrs.

## PRODUCT OVERVIEW ADHESIVES

The following table indicates which products can be used with which type of wood flooring:

	144 EUROMIX PU MULTI	146 EUROMIX WOOD BASIC	148 EUROMIX WOOD	153 EUROWOOD LE
Mosaic parquet*	✓	✓	✓	✓
On edge lamella parquet*	✓	✓	✓	✓
LAM Parquet*	✓	✓	✓	✓
Strip parquet	✓	✓	✓	✓
Strip parquet/short boards	✓	✓	✓	✓
Solid floor boards	✓	✓	✓	✓
8 mm - Solid hardwood floor	✓	✓	✓	✓
Surface treated solid floor boards	✓	✓	✓	✓
2 layered rods	✓	✓	✓	✓
Inlaid parquet, prefabricated parquet	✓	✓	✓	✓
3 layered planks	✓	✓	✓	✓

\* To be used together with approved lacquers and oils (858 Eurofinish M Protect, 832 Eurofinish Duo, 884 N Eurofinish Perfect Duo)

## PRODUCT OVERVIEW ADHESIVES

The following table indicates which products can be used with which type of wood flooring:

	157 EUROWOOD MS	159 EUROWOOD PRO	554 EUROSTAR PARQUET PLUS
Mosaic parquet*	✓		✓
On edge lamella parquet*	✓ 15 mm		✓ 22 mm
LAM Parquet*	✓		✓ oak
Strip parquet	✓		✓
Strip parquet/short boards	✓		✓
Solid floor boards	✓		
Surface treated solid floor boards	✓		
2 layered rods	✓	✓	✓
Inlaid parquet, prefabricated parquet	✓	✓	✓
3 layered planks	✓	✓	

\* To be used together with approved lacquers and oils (858 Eurofinish M Protect, 832 Eurofinish Duo, 884 N Eurofinish Perfect Duo)



# **PARQUET LACQUER** & PARQUET OIL-WAX

# WOOD PUTTY AND PRIMERS

## 870 EUROFILLER WOOD



### Wood filler solution

Aroma free wood filler solution to be mixed with sanding dust (grain 80-100) of all types of wood. To use for joint-filling up to 2 mm, fast drying, clear, easy to sand. Especially for renovation of old parquet floorings and wood, which contains a lot of fat. Hazardous material: Please consider security advices and Ordinance on hazardous materials!



NMP-free

**Unit size:** 10 l

**Shipping unit:** 42/pallet

**Consumption:** 50 - 100 ml/m<sup>2</sup> depending on the floor condition and joint size

**Application:** double sided spatula

**Drying time:** approx. 30 min.



## 8802 EUROFILLER WOOD PLUS



### Wood filler solution

Water-based, pre-filled wood putty solution. For mixing with dust remains from sanding parquet to create a spatula applicable putty for filling parquet joints up to 2 mm width.



NMP-free

**Unit size:** 5 kg, 10 kg

**Shipping unit:** 72/pallet, 44/pallet

**Consumption:** 50 - 150 g/m<sup>2</sup> depending on size and number of joints

**Application:** double sided spatula

**Drying time:** 30 - 60 min.



## 882 EUROPRIME BASE



### Primer lacquer

Ready-to-use primer for all permitted, standard wood floors. To be used prior to Eurocol lacquer application to ensure perfect surface appearance after top lacquer.



NMP-free

**Unit size:** 5 l

**Shipping unit:** 4/carton, 96/pallet

**Consumption/Application:** approx. 30 ml/m<sup>2</sup> double-sided spatula, approx. 100 ml/m<sup>2</sup> aqua micro-fibre roller

**Drying time:** 30 - 60 min.



## 865 EUROPRIME BLOCK



**Blocking primer, for exotic wood** | primer for renovation and exotic wood | light, warm-toned wood grain accentuation

Primer (containing solvents) for use before application of Eurocol parquet lacquers. Blocks top lacquers against wood components and residues which might cause problems with lacquer bonding and discolouration. Especially for exotic wood, smoked oak. Ideal for renovation of old floorings. Hazardous material: Please check safety data sheet!



**Unit size:** 10 l

**Shipping unit:** 60/pallet

**Consumption:** approx. 100 ml/m<sup>2</sup>

**Drying time:** 1 - 2 hrs. up to max 12 hrs.



# PARQUET LACQUER

## 832 EUROFINISH DUO 2C



**Two-component Acrylic-based parquet lacquer** | gloss, silk matt, matt | object use, wear-resistant | very good mechanical/chemical resistance

Dispersion-based two-component lacquer for durable sealing of all kinds of permitted standard wood floors. Wear resistant class C according to Austrian standard C 2354.



**Unit size:** 4.3 l + 0.26 kg  
Hardener Aqua LE

**Shipping unit:** 4/carton, 96/pallet

**Consumption/Application:**  
20 ml/m<sup>2</sup> double sided spatula  
100 ml/m<sup>2</sup> aqua microfibre roller

**Drying time:** approx. 15 min./application with double sided spatula,  
4 hrs./application with aqua microfibre roller

**Processing time:** approx. 1.5 hrs.



## 855 EUROFINISH BASIC



**One-component Acrylic-PU-based lacquer** | gloss, silk matt, semi matt | residential use

Dispersion-based parquet lacquer for finishing of all kinds of permitted standard wood floors. For residential use. Emission-tested product according to DIBt principles. Wear resistant class A according to Austrian standard C2354.



**Unit size:** 5 l

**Shipping unit:** 4/carton, 96/pallet

**Consumption/Application:**  
approx. 30 ml/m<sup>2</sup> double-sided spatula,  
approx. 120 ml/m<sup>2</sup> aqua microfibre roller

**Drying time:** approx. 30 min/coating, double-sided spatula,  
4 hrs./coating aqua microfibre roller



## 858 EUROFINISH M PROTECT



**One-component parquet lacquer** | silk matt | characteristics of a two-component lacquer | suitable over underfloor heating systems

Dispersion-based, one-component parquet lacquer for finishing of all kinds of permitted, standard wood floors. Hardens with atmospheric oxygen to a scratch and abrasive resistant finish with excellent resistance to household chemicals. Hardened lacquer film eventually achieves almost the same chemical/mechanical resistance and durability as a two-component lacquer. Wear resistant class C according to Austrian standard C 2354.



**Unit size:** 5 l

**Shipping unit:** 4/carton, 96/pallet

**Consumption/Application:**  
approx. 30 ml/m<sup>2</sup> double-sided spatula,  
approx. 120 ml/m<sup>2</sup> aqua microfibre roller

**Drying time:** approx. 20 min. with double sided spatula,  
4 hrs. with microfibre roller





# PARQUET LACQUER

## 867 EUROFINISH EASY FUTURE



**One-component PU-based parquet lacquer** | gloss, silk matt, matt | excellent surface appearance | suitable for residential areas

High quality, dispersion-based parquet lacquer with good spreading properties used for durable sealing of all kinds of permitted standard wood floors. Wear resistant class C according to Austrian standard C 2354. Meets anti-slip rate R9 according to BGR 181 in combination with 873 Aqua Lacquer additive. Corresponds to the DIN EN 71-3 standard for toy safety and migration of certain elements.

**Unit size:** 5 l

**Shipping unit:** 4/carton, 96/pallet

### Consumption/Application:

30 - 50 ml/m<sup>2</sup> double sided spatula,  
approx. 100 - 120 ml/m<sup>2</sup> aqua microfibre roller

**Drying time:** approx. 30 min./ application with double sided spatula, 3 - 4 hrs./ application with microfibre roller



NMP-free



## 884N EUROFINISH PERFECT DUO 2C



**Two-component PU-based parquet lacquer** | gloss, silk matt, matt | object and residential use | very high chemical resistance | excellent wear resistance | for high stress areas

High-end product, two-component, PUR-dispersion-based parquet lacquer for extremely abrasion-resistant, hard-wearing, chemical-resistant sealing of all standard parquet and cork floors. For finishing of all kinds of permitted standard parquet. Creates an extremely durable scratch-resistant and chemically resistant surface. Wear resistant class C according to Austrian standard C 2354. Meets anti-slip rate R9 according to BGR 181 in combination with 873 Aqua Lacquer additive. Corresponds to the DIN EN 71-3 standard for toy safety and migration of certain elements.

**Unit size:** 4.3 l + 0.26 kg Hardener Aqua LE

**Shipping unit:** 4/carton, 96/pallet

### Consumption/Application:


approx. 30 ml/m<sup>2</sup> double sided spatula  
approx. 100 ml/m<sup>2</sup> aqua microfibre roller

**Drying time:** approx. 20 min./application with double sided spatula, 3 hrs./application with aqua microfibre roller

**Processing time:** approx. 4 hrs.



NMP-free



## 873 AQUA LACK ADDITIVE

### R9 Additive



873 Aqua lacquer additive for permitted Eurocol finishing lacquers (Eurocol 884N, Eurocol 867) to meet anti-slip rate R9 according to BGR 181, DIN 51130.

**Unit size:** 0.15 kg

For 5 l aqua lacquer

# PARQUET OIL-WAX




## 850 EUROFINISH OIL WAX

**One-component oil wax emulsion** | project and residential use | semi-matt  
| hard-wax oil

Ready to use, deeply penetrating mix of high quality waxes and natural oils to use for impregnation and care of absorbent wooden floors, wood-block pavement and cork. Can be rolled or applied by spatula.

Pay attention to the suitability of the wood type. For project and residential areas with high traffic. Meets anti slip rate R9 according to BGR 181.



**Unit size:** 2.5 l

**Shipping unit:** 2/carton, 144/pallet

**Consumption/Application:**

approx. 20 ml/m<sup>2</sup> double sided spatula  
approx. 50 ml/m<sup>2</sup> oil-wax velour roller

**Drying time:** 8-10 hrs., 15 hrs./application




## 862 EUROFINISH HARD OIL HS

**One-component Impregnation oil** | project and residential use | silk-matt

Ready to use, high solid content parquet and wood oil for finishing of all kinds of unsealed, permitted standard wooden floors.

For project and residential areas with high traffic.



**Unit size:** 3 l

**Shipping unit:** 126/pallet

**Consumption/Application:**

approx. 25 - 30 ml/m<sup>2</sup> double sided spatula


**Drying time:** approx. 48 hrs.



## 869 EUROFINISH OIL WAX DUO 2C

**Two-component impregnation oil** | for high traffic areas | enables fast walkability of sealed floor | silk-matt

High solid content, solvent- and water-free, two-component oil-wax paste for finishing of all kinds of permitted, unsealed standard wooden floors. Hardens very fast, enabling fast walkability. Provides excellent chemical resistance. Finished surface combines appearance of naturally oil-wax impregnated wooden-floor with excellent chemical resistance.



**Unit size:** 1 l combi (A+B)

**Shipping unit:** 1/carton, 240/pallet

**Consumption/Application:**

25 - 35 ml/m<sup>2</sup> double sided spatula

**Drying time between coatings:**

approx. 30 - 60 min.

**Accessibility:** after approx. 4 hrs.

**Usability:** after approx. 24 hrs. roller

**Processing time:** 2 - 3 hrs.



## 879 EUROCLEAR OIL

**Care and refresh oil** | high traffic and residential use | oxidative curing

Oil for cleaning and refreshing of manually oiled and waxed parquet and wooden surfaces in one working step. Significantly improves the wear resistance of all kinds wooden floors, in particular that of soft wood. Recommended for areas with high traffic like doorways and entrance areas. Contains solvents! Pay attention to the safety data sheet!



**Unit size:** 2.5 l

**Shipping unit:** 4/carton, 240/pallet

**Consumption/Application:**

80 - 100 ml/m<sup>2</sup> oil/wax roller or oil brush

**Drying time:** approx. 24 hrs.



A close-up photograph of a mop head with white microfiber strands cleaning a white liquid spill on a light-colored wooden floor. The mop head is positioned on the right side of the frame, with its fibers touching the spill. The wooden floor has a visible grain and knots. The text 'CLEANING AND MAINTENANCE' is overlaid in white at the bottom left.

# CLEANING AND **MAINTENANCE**

# CLEANING AND MAINTENANCE

## 888 EUROCLEAN UNI



**Universal base cleaner** | clean & care in one step | pH neutral, skin friendly | for all waterproof surfaces

Self-shiny, dirt repellent maintenance agent for professional initial and regular clean and care of all types of engineered and manually sealed floor coverings (wood floors, resilient floor coverings) in one step. Efficiently removes firmly adhering dirt and heel marks, and reduces potential risk of further marks. Streak free drying, no polishing needed. Skin friendly since pH-neutral. Very economic consumption. Machine applicable. Must be added to mopping water according to instructions.

Giscode  
GU 50

**Unit size:** 2.5 l, 5 l

**Shipping unit:** 8/carton, 120/pallet (2.5 l), 96/pallet (5 l)

**Consumption:** depending on dirt

**Application:** wipe, cloth

**Exposure time:** at least 30 min.



## 891 EUROCLEAN BASIC



**Universal cleaner** | also suitable for linoleum

Water-based alkaline-based cleaning agent for thorough basic cleaning of all sorts of alkali-resistant floors (alkaline resistance up to pH-value 9 is required). Can be used for removing old maintenance coatings, makes removal of adhesive and tackifier residues easier after floor covering removal. Base cleaner before floor covering refreshing with 898 Euroclean Longlife and before floor covering recoating with C floor system.

Giscode  
GG 60

**Unit size:** 2.5 l, 10 l

**Shipping unit:** 8/carton, 120/pallet (2.5 l), 60/pallet (10 l)

**Consumption:** depending on dirt

**Application:** wipe, cloth

**Exposure time:** at least 10 min.



## 898 EUROCLEAN LONGLIFE



**Full area refreshment of old and new floor coverings** | resistant against footprints, dirt | easy to clean

Hard-wearing, self-shiny, dirt repelling maintenance agent for full area refreshment of worn floor coverings. Initial and regular care of manually sealed parquet, cork floor coverings, resilient floor coverings is subject to manufacturer's instructions. Can be added to mopping water according to instructions. Dries to a slip and stain resistant protective film. No polishing needed.

Giscode  
GE 20

**Unit size:** 2.5 l, 5 l

**Shipping unit:** 8/carton, 120/pallet (2.5 l), 4/carton, 96/pallet (5 l)

**Consumption:** 1 l/40 m<sup>2</sup>, 0.5 - 0.7 l for 100 m<sup>2</sup> in mopping water

**Application:** wipe

**Drying time:** 1 - 2 hrs.



# CLEANING AND MAINTENANCE OF OILED AND WAXED PARQUET

## 879 EUROCLEAR OIL



**Care and refresh oil** | high traffic and residential use | oxidative curing

Oil for cleaning and refreshing of manually oiled and waxed parquet and wooden surfaces in one working step. Significantly improves the wear resistance of all kinds wooden floors, in particular that of soft wood. Recommended for areas with high traffic like doorways and entrance areas. Contains solvents! Pay attention to the safety data sheet!



**Unit size:** 2.5 l

**Shipping unit:** 4/carton, 240/pallet

**Consumption/Application:**

80 - 100 ml/m<sup>2</sup> oil/wax roller or oil brush

**Drying time:** approx. 24 hrs.



## 896 EUROCARE OIL



**Care and refresh oil** | long-lasting protection for wooden floors | extends life of parquet sealing | regenerates the existing coating during maintenance care and fills in slight scratches | the oil provides an additional protective film on the wooded surface

Effective combination for initial and maintenance care, for refreshment of parquet and cork floor coverings manually sealed with oil-based Eurocol products, and for UV-oiled wooden surfaces. Suitable as a mopping water additive for maintenance care.



**Unit size:** 1 l

**Shipping unit:** 4/carton, 552/pallet

**Consumption:**

**Initial treatment:**

undiluted, approx. 5 – 10 ml/m<sup>2</sup>

**Maintenance care:** approx. 250 ml for 5 liters of mopping water/flat mop, for approx. 100 m<sup>2</sup>

**Initial treatment:** 1 liter for approx. 100m<sup>2</sup> pure/flat mop

**Drying time:** approx. 60 minutes, can be polished with a white pad



## 897 EUROCLEAR SPORT



**Clean & care for sports floors** | artified for sports floors according to DIN 18032 | resistant to staining and discolouration

Self-shiny, dirt repelling polymer dispersion for initial and regular care of lacquered resilient and wooden sports floors. Dries to a slip-resistant protective coat which is resistant to staining, footstep/heel marking. Streak free drying, no polishing needed. Slip-resistant according to German standard DIN 18032. Certified for sports floors according to DIN 18032.



**Unit size:** 10 l

**Shipping unit:** 60/pallet

**Consumption:** approx. 1 l/30 m<sup>2</sup>







# **SURFACE** PRODUCTS




# betondesign

FLOOR AND WALL WITH THE LOOK  
OF BASIC CONCRETE




## COLOURS



signal grey



ash




warm white



telegrau 1




dusty grey



stone grey




greige




platinum grey



slate



olive



rust (special)

It is possible to create special colours for surfaces above approx. 450 m<sup>2</sup> (RAL, RGB or Pantone). Delivery time for these special colours is at least six weeks after the customer's approval. Please contact Forbo Eurocol.

# BETONDESIGN

## 305 BETONDESIGN

### Pasty finishing coat with decorative concrete look



Ready to use, easy to apply, polymer dispersion-based compound for creating individually designed, unique, spatula-structured surfaces on floors and walls; single-colored (concrete design), multi-colored (marble design). It requires a smooth, stable, even and crack-free subfloor. 910 Europlan PU Duo provides a stable, even, crack over-bridging subfloor for BetonDesign. 960 Europlan Super provides a stable, even subfloor for BetonDesign.



**Unit size:** 7 kg

**Shipping unit:** 72/pallet

**Consumption:** approx. 400 - 500 g/m<sup>2</sup> per layer

**Application:** Spatula

**Hardening time:**

1. Layer approx. 4 – 6 hrs.,
2. Layer approx. 6 hrs.



## 301 BASESEALER

**One-component base coat for BetonDesign floors** | VOC emission-free | Waterborne | Easy to process | Ready for use | Quick-drying | No yellowing | Very good adhesion



For applying a base coat on a BetonDesign floor as an impregnation layer and adhesion improver for the 311 TopCoat.



**Unit size:** 2.5 kg

**Shipping unit:** 128/pallet

**Consumption:** approx. 150 - 250 ml/m<sup>2</sup>

**Application:** Eurotool Microfibre Roller

**Processing time:** approx. 2 - 4 hrs.  
(at 20 °C and an RH of 60%)

**Drying time:**

Walkable after 2 - 4 hrs at 20 °C.



## 311 TOPCOAT

**Dispersion-based, 2C PU TopCoat Lacquer** | for long term protection in high traffic areas | resistant against chemicals | wear-resistant | semi matt



Top coating designed for the transparent protection of hard surfaces like BetonDesign but also approved levelling compound surfaces (ConcreteDesign, FloorColouring). The coating creates a very high wear and scratch resistant protective layer with a good resistance to many household chemicals. Its semi matt appearance preserves the natural character and highlights the structured surface of the floor. Reduces dirt adhesion.



**Unit size:** 2.5 kg combi (A+B)

**Shipping unit:** 128/pallet

**Consumption:**  
approx. 50 - 75 ml/m<sup>2</sup>/mm

**Application:** Eurotool Microfibre Roller

**First careful walking:** after 8 hrs. (after lacquer application)

**Final hardness:** approx. 7 days (after finishing coat has fully hardened)



ALTERNATIVE:  
ALSO 322 C FLOOR  
USABLE

## STRIPPING AND RE-COATING OF WORN RESILIENT FLOOR COVERINGS



The installed PVC floor is completely worn out.



C FLOOR sealed surfaces are not only highly cross-linked, they also form a high early strength. This ensures that the C FLOOR floors are not only finished quickly but also can be used within a short time.



100 % TECHNICAL  
AND SERVICE  
KNOW-HOW FOR  
PROLONGING  
THE LIFE OF YOUR  
RESILIENT FLOOR  
COVERING

After C FLOOR, the floor looks like new.

# C FLOOR

## 891 EUROCLEAN BASIC

### Water-based universal basic cleaning agent



Water-based base cleaner for base or intensive cleaning and de-coating of suitable resilient floor coverings (PVC, CV, elastomer, linoleum, sealed parquet), as part of a regular cleaning work and the C Floor renovation system.  
Instructions for the different flooring types!  
In industrial vacuum cleaning machines can be used.



**Unit size:** 2.5 l, 10 l

**Shipping unit:** 8/carton, 120/pallet (2.5 l), 60/pallet (10 l)

**Consumption:** depending on dirt

**Application:** wipe, cloth

**Exposure time:** approx. 10 min.

## 322 C FLOOR

### 2C Coating for floor covering and Eurocol Surface floors-coating and re-coating | highly wear resistant | highly chemical resistant



+ Hardener

Dispersion based, two-component polymer coat with high cross-linking density for the long-term, hardwearing protection of old and new resilient floor coverings and Eurocol Surface Floors. For top-coating of new and re-coating of worn resilient floorcoverings. Also for floor coverings, which are exposed to extremely high mechanical and chemical stress. Eurocol 322 C Floor creates a wear- and scratch resistant, protection coat with excellent elasticity and chemical resistance. Reduced time daily cleaning maintenance, reduced for daily dirt adhesion. Easy to apply with excellent adhesion. Anti-slip classification R9 and R10/ R11 with R10/R11 Anti-Slip Additive.

Matt-finish.



**Unit size:** 5 l + 1.25 l Hardener Surface Finish

**Shipping unit:** 5 l (102/pallet), 1.25 l (300/pallet)

**Consumption:** approx. 85 - 100 ml/m<sup>2</sup> per layer

**Application:** Eurotool Microfibre Roller

**Processing time:** approx. 4 hrs.

**Hardening time:** approx. 48 hrs.

## 321 C FLOOR COLOR DUO

### Full area refreshment of old and new floor coverings | highly wear resistant | highly chemical resistant | high cross linking ratio



incl. Hardener

PU-based, 2-component colored coating with excellent color opacity for coating of new and re-coating of old, worn or badly maintained resilient floor coverings. Especially for those old floor coverings with stains and defects which are not remediable by transparent re-coating. Also for new or well-preserved floor coverings which are to be re-designed. It is possible to scatter color chips (for special chip design) onto the still wet top color coat.

The color coat (with or without chip design) has to be sealed with Eurocol 322 C Floor, transparent C Floor coat.



**Unit size:** 5.52 l combi (A+B)

**Shipping unit:** 48/pallet

**Consumption:** approx. 100 - 120 ml/m<sup>2</sup> per layer

**Application:** Eurotool Microfibre Roller

**Drying time:** approx. 4 - 48 hrs.



## TOOLS & MORE



### EUROTOOL MIXING BUCKET

Bucket for mixing levelling compounds.

**Prod.-no. 110469**, 1 pcs./VE

30 litre capacity



### EUROTOOL WATER BUCKET

Bucket with scale for measuring of precise water quantity for Eurocol powder products.

**Prod.-no. 110474**, 1 pcs./VE

10 litre capacity



### EUROTOOL MIXER

**With hexagonal fixing** | Mixer for screwing, for homogeneous mixing of Eurocol levelling compounds.

**Prod.-no. 110471**, 1 pc./VE

**With M14 thread fixing** | Mixer for screwing, for homogeneous mixing of Eurocol levelling compounds.

**Prod.-no. 110473**, 1 pc./VE



### EUROTOOL DOUBLE SIDED SPATULA

Stainless steel, for applying all suitable types of Eurocol parquet lacquers, oils and waxes.

**Prod.-no. 110570**, 1 pc./VE

**Length:** 27 cm



### EUROTOOL SPATULA HANDLE


Spatula handle for sticking into notched trowels.

**Prod.-no. 110522**, 1 pc./VE

**Length:** 28 cm

### EUROTOOL NOTCHED TROWELS

Double-sided toothed blades for applying adhesives to elastic flooring and parquet.

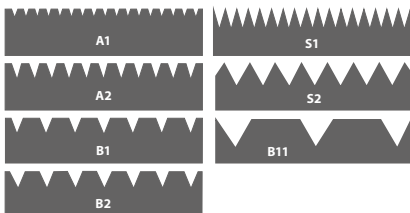

**A1 - Prod.-no. 111412** | 21 cm  
**A2 - Prod.-no. 111413** | 21 cm  
**B1 - Prod.-no. 111415** | 21 cm  
**B2 - Prod.-no. 111416** | 21 cm  
**S1 - Prod.-no. 111418** | 28 cm  
**S2 - Prod.-no. 111419** | 28 cm  
**B11 - Prod.-no. 111420** | 28 cm  
**78 - Prod.-no. 111421** | 28 cm

10 pcs./VE

## TOOLS & MORE

---



### EUROTOOL SPIKE ROLLER

Spike roller for removing the air from freshly applied Eurocol levelling compounds.  
Spike length: 12 mm

**Prod.-no. 110465**, 1 pc./VE

**Length:** 25 cm

---



### EUROTOOL METAL SPIKE ROLLER

Vent roller for Eurocol Surface products with fine metal spikes (0.04 mm) to create a very fine finish.  
Spike length: 15 mm

**Prod.-no. 111067**, 1 pc./VE

**Length:** 25 cm

---



### EUROTOOL OIL - WAX ROLLER

Disposable roller especially for oil-wax systems.

**Prod.-no. 110575**, 1 pc./VE

**Length:** 25 cm, 4 mm Floor

---



### EUROTOOL NYLONFIBRE ROLLER

Application roller especially for solvent-based paints in a single-coat application.  
Application quantity approx. 250 - 300 g/m<sup>2</sup>.

**Prod.-no. 110570**, 1 pc./VE

**Length:** 25 cm, 14 mm floor

---



### EUROTOOL MICROFIBRE ROLLER

Disposable roller for all types of aqua lacquers and primers.

**Prod.-no. 110571**, 1 pc./VE

**Length:** 25 cm, 11 mm Floor

---



### EUROTOOL HANDLE

For all Eurocol rollers and spike rollers.

**Prod.-no. 110572**, 1 pc./VE

**Length:** 25 cm

**Prod.-no. 110576**, 1 pc./VE

**Length:** 60 cm

**Prod.-no. 111408**, 1 pc./VE

**Length:** 6 cm



## TOOLS & MORE

---



### EUROCLEAN REPAIR PAD, GREY

Pad for linoleum, PVC, vinyl, rubber. For wet grinding and basic cleaning in combination with the 891 Euroclean Basic (alkaline). Rinse the pad with warm water after use.

**Prod.-no. 110903**, 1 pc./VE

**Size:** Ø 410 mm

**Colour:** grey



### EUROTOOL C FLOOR DISK 100 LINO

Grinding plate for base cleaning and dry grinding of worn linoleum. With raised ring and coupling. Replacement lamellas on request.

**Prod.-no. 110910**, 1 pc./VE

**Size:** Ø 410 mm



### 815 EUROCLEAN HANDCLEAN

#### Cleaning tissues

For general hand and tool cleaning. In particular for cleaning floor surfaces to remove unhardened silicone, PU-foam, PU-, Epoxy-, MS- construction related adhesive residues or sealing compounds.

**Unit size:** 80 tissues, (20 \* 30 cm)/box

**Shipping unit:** 6 boxes/carton



### 358 TOOLCLEANER

**Multi-cleaner** | especially designed for LiquidDesign tools and industrial pollution

Also suitable for cleaning adhesive mixers (including two component adhesives) and tools, machines, floors contaminated with resins/plastics (polyesters, polystyrene, polyurethane, polyamides, polyimides) ink, paint, stickers/glue residues, tar and bituminous pollution, among others.

**Unit size:** 10 l

**Shipping unit:** 60/pallet



### WAVE CONNECTORS

Wavy metal clips to be inserted into floor-cracks before filling and closing them with recommended crack-closing compounds.

**Prod.-no. 110466**, 100 pcs./VE

## NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

**Forbo Eurocol Deutschland GmbH**

August-Röbling-Str. 2 • D-99091 Erfurt

Phone: + 49 (0)361 73041-0 • Fax: + 49 (0)361 73041-91

info.erfurt@forbo.com • www.forbo-eurocol.de



Eurocol is part of the Forbo Group



EN 05/20