

Technical specifications

Nuway Aonnect with Coral Alassic textile insert												
Combination	Textile only						Textile and 4 row bristle					
System	Open			Closed			Open			Closed		
	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm
Depth to height of aluminium (mm)	8	14	19	8	14	19	8	14	19	8	14	19
Depth to height of insert (mm)	11	17	22	11	17	22	15	21	26	15	21	26
Distance between the profiles (mm)	5			0			5			0		
Article code (47xx is colour number)	810547xx0	817547xx0	822547xx0	810047xx0	817047xx0	822047xx0	810547xx3	817547xx3	822547xx3	810047xx3	817047xx3	822047xx3
Weight (kg)	9.5	13.2	14.9	10.5	15.1	17.1	11.1	15.1	16.9	12.4	17.4	19.4
Max width per module (mm)	3000											
Max depth per module (mm)	Relates to the weight											
Max weight per module (kg)	23											
Dynamic load (kg) wheel of 80mm, 40,000 passes	200	200	200	200	200	200	50	50	50	50	50	50
Static load (kg/sqcm)	200	200	200	200	200	200	100	100	100	100	100	100
Fire behaviour EN ISO 9239-1	B _f s1						C _f s1					
Frame	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3
Ramp frame	11 x 49	17 x 70		11 x 49	17 x 70		11 x 49	17 x 70		11 x 49	17 x 70	
Material and manufacturing method	Anodised aluminium profiles with PVC connector profiles, stainless steel clips											
Wiper design	Coral clean-off system						Coral clean-off system and 4 row bristles					
Wiper material	100% polyamide BCF						100% polyamide BCF for both textile and bristles					

Nuway connect with Coral classic textile insert												
Combination	Bristle only						Bristle and Rubber					
System	Open			Closed			Open			Closed		
	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm
Depth to height of aluminium (mm)	8	14	19	8	14	19	8	14	19	8	14	19
Depth to height of insert (mm)	15	21	26	15	21	26	15	21	26	15	21	26
Distance between the profiles (mm)	5			0			5			0		
Article code (47xx is colour number)	810510000	817510000	822510000	810010000	817010000	822010000	810510004	817510004	822510004	810010004	817010004	822010004
Weight (kg)	12.7	17.1	18.8	14.2	19.6	21.6	12.3	16.6	18.3	13.8	19.1	21.1
Max width per module (mm)	3000											
Max depth per module (mm)	Relates to the weight											
Max weight per module (kg)	23											
Dynamic load (kg) wheel of 80mm, 40,000 passes	50	50	50	50	50	50	50	50	50	50	50	50
Static load (kg/sqcm)	100	100	100	100	100	100	100	100	100	100	100	100
Fire behaviour EN ISO 9239-1	C _f s1						C _f s1					
Frame	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3	13 x 13 x 17	19 x 19 x 17	25 x 25 x 3
Ramp frame	11 x 49	17 x 70		11 x 49	17 x 70		11 x 49	17 x 70		11 x 49	17 x 70	
Material and manufacturing method	Anodised aluminium profiles with PVC connector profiles, stainless steel clips											
Wiper design	4 row bristles						4 row bristles and ribbed rubber					
Wiper material	100% polyamide BCF						100% polyamide BCF for bristles and 100% EPDM for rubber					


Please note EPDM rubber is Ethylene Propylene Diene Monomer.

Technical specifications


Nuway Aonnect with Coral Alassic textile insert						
Combination	Rubber only					
System	Open			Closed		
	10mm	17mm	22mm	10mm	17mm	22mm
Depth to height of aluminium (mm)	8	14	19	8	14	19
Depth to height of insert (mm)	12	18	23	12	18	23
Distance between the profiles (mm)	5			0		
Article code (47xx is colour number)	810520000	817520000	822520000	810020000	817020000	822020000
Weight (kg)	12.0	16.2	17.9	13.3	18.6	20.6
Max width per module (mm)	3000					
Max depth per module (mm)	Relates to the weight					
Max weight per module (kg)	23					
Dynamic load (kg) wheel of 80mm, 40,000 passes	100	100	100	100	100	100
Static load (kg/sqcm)	100	100	100	100	100	100
Fire behaviour EN ISO 9239-1	C _f s1					
Frame	13 x 13 x 1.7	19 x 19 x 1.7	25 x 25 x 3	13 x 13 x 1.7	19 x 19 x 1.7	25 x 25 x 3
Ramp frame	11 x 49	17 x 70		11 x 49	17 x 70	
Material and manufacturing method	Anodised aluminium profiles with PVC connector profiles, stainless steel clips					
Wiper design	Ribbed rubber					
Wiper material	100% EPDM					

Main dimensions shown in mm

Nuway connect 10mm



Nuway connect 17mm

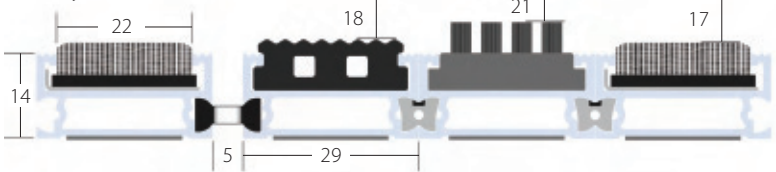

Nuway connect 22mm

