




354 | dark grey


Suitable for every type of commercial installation, Tessera Basis fits throughout the building, wherever an attractive and hardwearing modular floorcovering is required. Manufactured from 100% Aquafil nylon, it has the resilience and durability needed to contend with the heavy wheeled traffic conditions often found in busy environments.

Available in 18 semi-plain colourways, basis offers an exceptionally diverse palette with classic and contemporary shades which fit beautifully with any office interior.

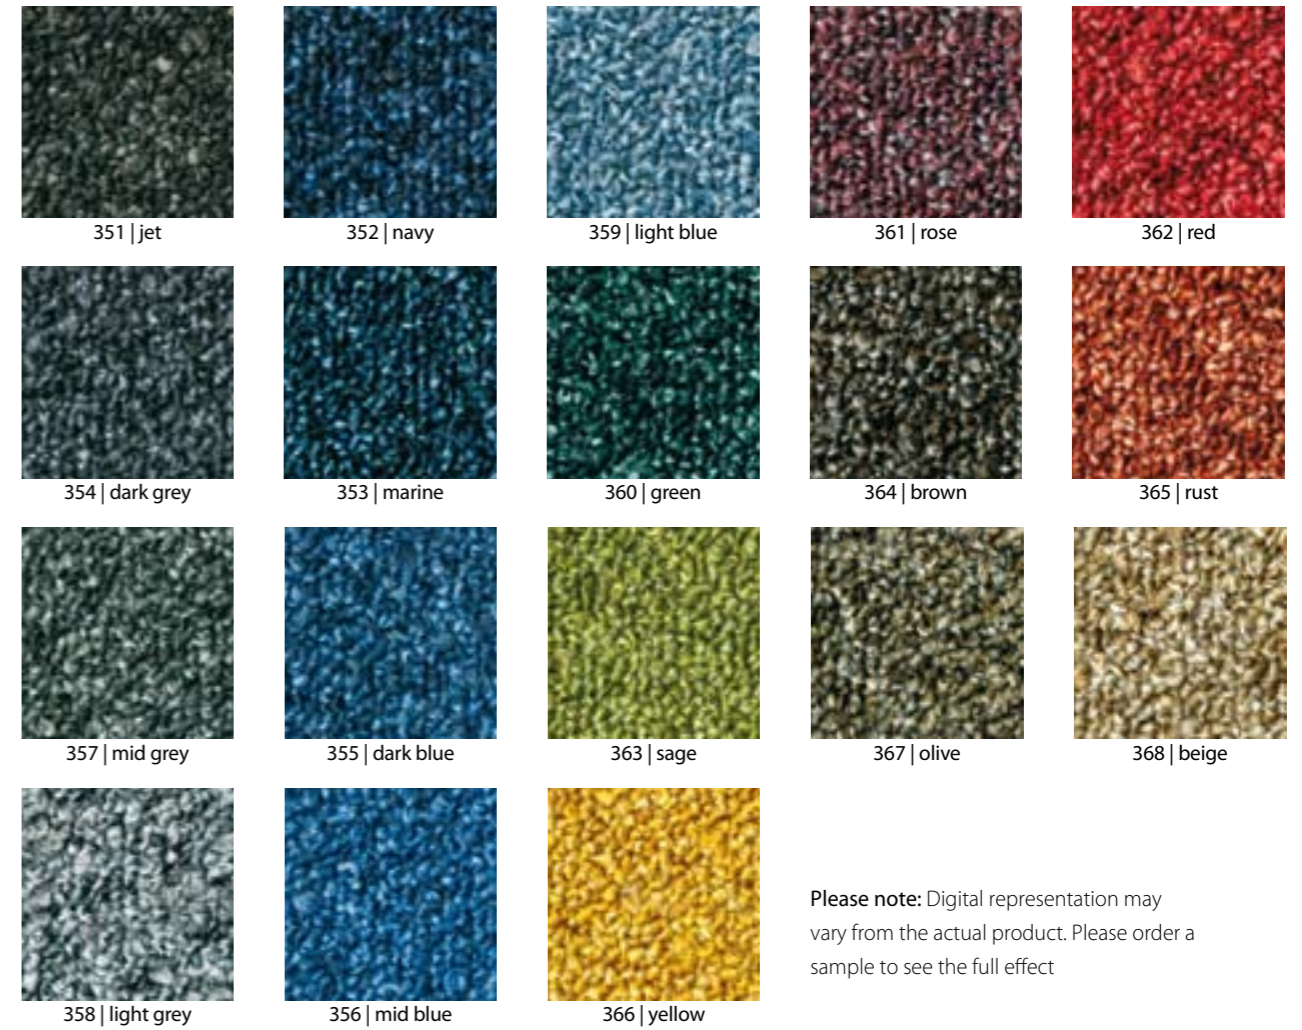

Please note: Digital representation may vary from the actual product. Please order a sample to see the full effect

tessera[®] basis technical specifications

Description	Tufted loop pile carpet tile	
Dimensions / tiles per box	50cm x 50cm / 20 tiles per box	
Total thickness	6,0mm ± 10%	
Installation Method	Broadloom, 1/4 turn, or tessellated 	
Pile composition	100% Aquafil polyamide	
Dye Method	Space dyed	
Pile Weight	520gsm ± 10%	
Total weight	3,835gsm ± 10%	
Stitch density	Tufts per m2	204,880 /m ² ± 10%
Primary backing	Polyester	
Secondary backing	Modified bitumen & polyester fleece	
Application	EN 1307	Class 33, suitable for any type of heavy contract application
Dimensional stability	EN 986	≤0.2 %
Castor chair	EN 985	Minimum R Value: ≥ 2.4
Light fastness	EN ISO 105-B02	>5
Impact sound reduction	ISO 140-8	22dB
Electrical resistance	EN 10965 & EN1815	<1 x 10 ⁹ Ω: Static dissipative. Body voltage < 2kV.
Environmental	Material used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. All Tessera carpet tiles are manufactured using 100% green electricity.	
Guarantee	Basis is guaranteed for 10 years under heavy contract conditions provided that it has been professionally fitted by a recognised contractor and regularly maintained in accordance with the Forbo requirements currently in force.	
CE	Basis meets the requirements of EN 14041	
Reaction to fire	EN 13501-1	B _s s1
Slip resistance	EN 13893	DS: ≥ 0,30

Forbo Flooring reserves the right to improve the specification of its products without giving prior notice. Errors and omissions excepted.