

CLASSIFICATION OF REACTION TO FIRE PERFORMANCE IN ACCORDANCE WITH EN 13501-1: 2007

Sponsor	Forbo Novilon B.V. De Holwert 12 NL-7741 KC COEVORDEN The Netherlands
Prepared by	Efectis Nederland BV Lange Kleiweg 5 P.O. Box 1090 NL-2280 CB RIJSWIJK The Netherlands
Notified Body no.	1234
Product name	Forbo Novibat 2S2 vinyl floor covering
Classification report no	2010-Efectis-R0545
Issue number	1
Date of issue	May 2010
Project number	2010101/128

This classification report consists of four pages and may only be used in its entirety.

This report is issued by Efectis Nederland BV (previously **TNO** Centre for Fire Research). Efectis Nederland BV and her sister company Efectis France are full subsidiaries of Efectis Holding SAS since 1st January 2008, in which the Dutch TNO and the French CTICM participate. The activities of the TNO Centre for Fire Research were privatised in Efectis Nederland BV since 1st July 2006. This is in response to international developments and requests by customers. In order to be able to give a better answer to the customer's request and offer a more comprehensive service of high quality and a wider range of facilities, the international collaboration has been further expanded. This is done with highly experienced partners in fire safety in Norway (Sinter-NBL), Spain (Afiti-Licof), Germany (IFT), USA (South West Research Institute) and China (TFRI). Further information can be found at our website.

1. Introduction

This classification report defines the classification assigned to **Forbo Novibat 2S2 vinyl floor covering** in accordance with the procedures given in EN 13501-1:2007 and EN 653.

2. Details of classified product

2.1 General

The product, **Forbo Novibat 2S2 vinyl floor covering**, is defined as a floor covering.

2.2 Product description

The product is a floor covering family according to EN 653 with a thickness/surface density range of 1.7 mm/1450 g/m² to 3.2 mm/2300 g/m².

- The floor covering is made of heterogeneous PVC;
- The base of the floor covering is an impregnated glass fleece web;
- The backing of the floor covering consists of a white coloured mechanical foam layer;
- The floor covering is provided with a 0.7 mm thick top layer, under which an imitation print is applied.

2.3 Manufacturer/Importer

Forbo Novilon B.V.
De Holwert 12
NL-7741 KC COEVORDEN
The Netherlands

3. Test reports & test results in support of classification

3.1 Test reports

Name of Laboratories	Name of sponsor	Test reports	Test method
Efectis Nederland BV The Netherlands	Forbo Novilon B.V. The Netherlands	2004-CVB-R0328 2005-CVB-R0219	EN ISO 11925-2:2002 EN ISO 9239-1:2002

3.2 Test results

Test method & test number	Parameter	No. tests	Results	
			Continuous parameter - mean (m)	Compliance parameters
TNO-reports: 2004-CVB-R0328 and 2005-CVB-R0219				
EN-ISO 11925-2 surface flame impingement	Fs ≤150 mm [mm]	6	84 and 68	-
	Ignition of filter paper		-	Compliant
EN ISO 9239-1	Critical Heat Flux [kW/m ²]	3	9.4 and 8.6	-
	Smoke density [%.min]		84 and 156	-

4. Classification and field of application

4.1 Reference of classification

This classification has been carried out in accordance with clause 12 of EN 13501-1:2007

4.2 Classification

The product, **Forbo Novibat 2S2 vinyl floor covering**, in relation to its reaction to fire behaviour is classified:

B_{fl}

The additional classification in relation to smoke production is:

s1

Reaction to fire classification: B_{fl} - s1

4.3 Field of application

This classification is valid for the following product parameters:

- Thickness/Surface density 1.7 mm/1450 g/m² to 3.2 mm/2300 g/m²

This classification is valid for the following end use applications:


- Substrate non-combustible (class A1, ISO 390 and EN 13238: 2001 par. 5.1.2 (1800 ± 200 kg/m³ – 6 mm)
- Methods and means of fixing Forbo vinyl adhesive
Amount approx. 0.3 to 0.4 kg/m² (wet)
- Joints no joints

4.4 Duration of the validity of this classification report


There are no limitations in time on the validity of this report.

5. Limitations

This classification document does not represent type approval or certification of the product.



Ing. C.C.M. Steinhage

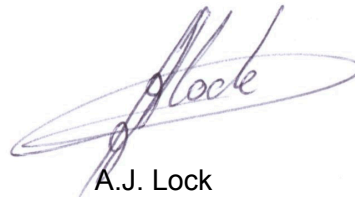

A.J. Lock

This report is issued by Efectis Nederland BV (previously **TNO** Centre for Fire Research). Efectis Nederland BV and her sister company Efectis France are full subsidiaries of Efectis Holding SAS since 1st January 2008, in which the Dutch TNO and the French CTICM participate. The activities of the TNO Centre for Fire Research were privatised in Efectis Nederland BV since 1st July 2006. This is in response to international developments and requests by customers. In order to be able to give a better answer to the customer's request and offer a more comprehensive service of high quality and a wider range of facilities, the international collaboration has been further expanded. This is done with highly experienced partners in fire safety in Norway (Sinter-NBL), Spain (Afiti-Licof), Germany (IFT), USA (South West Research Institute) and China (TFRI). Further information can be found at our website.