




allura click

creating better environments

Forbo
FLOORING SYSTEMS

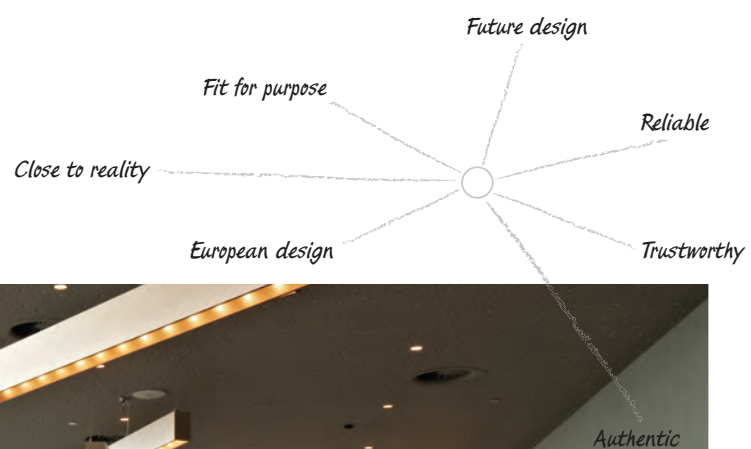


ALLURA CLICK

With Allura click, Forbo introduces an extension of its Luxury Vinyl Tile collection with 18 elegant designs in wood and stone decors. Realistic plank sizes, natural embossing and true tone colours make every item unique. For Allura click we have created a comprehensive collection of known and popular designs that offer a wide variety of choice to accommodate 'taste' and quality to all types of applications.



EASY does it

LEISURE & HOSPITALITY

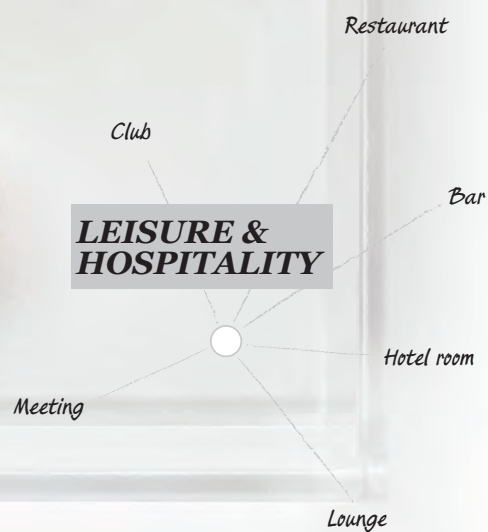

Beauty

Pharmacy

Design

RETAIL

Waiting area

Clothing



FLOOR FOCUS
OR MODEST
FOUNDATION




allura click

121,2 x 18,5 cm




W50063* / W56063**
mid ceruse oak



W50041* / W56041**
rustic warm oak



W50001* / W56001**
warm red oak



W50052* / W56052**
linear oak



W50065* / W56065**
ceruse oak




W50014* / W56014**
bright multicolour oak

121,2 x 18,5 cm



W50013* / W56013**
rustic multicolour oak



W50037* / W56037**
brown grey oak



W50018* / W56018**
multicolour light oak



W50025* / W56025**
green grey oak



W50074* / W56074**
linear smoked oak




W50002* / W56002**
lightbrown oak

121,2 x 18,5 cm



W50091* / W56091**
cherry



W50088* / W56088**
walnut



W50026* / W56026**
off white oak




W50087* / W56087**
beech

R6JCQ

31,2 x 60 cm



S52014*(1) / S57014**(1)
grey concrete



S52001*(1) / S57001**(1)
black slate

* Allura click compact 0.55 mm
** Allura click compact 0.30 mm
(1) Chanfrein 4 côtés

Technical specifications

Allura click meets the requirements of EN-ISO 10582-type 1

	Total thickness	EN-ISO 24346	5.0 mm
	Thickness of wearlayer	EN-ISO 24340	0.55 mm
	Commercial heavy	EN-ISO 10874	Class 33
	Light industrial general	EN-ISO 10874	Class 42
	PU coated		Yes
	Bevelled edge		Yes
	Plank size	EN-ISO 24342	185 x 1212 mm
	Tile size		312 x 600 mm
	Total weight	EN-ISO 23997	9300 gr/m ²
	Packaging per carton planks		1,79 m ²
	Packaging per pallet		75,26 m ² = 42 boxes
	Packaging per carton tiles		1,86 m ²
	Packaging per pallet		74,80 m ² = 40 boxes
	Slip resistance	DIN 51130	R9
	Acoustical impact noise reduction	EN-ISO 717-2	approx. 7 dB / 11 dB in combination with Forbo Click Underlay
	Castor chair continuous use	EN 425	Type W
	Residual indentation	EN-ISO 24343-1	< 0.10 mm
	Light fastness	EN-ISO 105-B02	≥ 6
	Resistance to chemicals		Resistant
	Dimensional stability	EN-ISO 23999	0.05%

Allura click meets the requirements of EN 14041

EN 14041
CE
0200135_DOP_310

	Reaction to fire	EN 13501-1	B _s S1 in combination with Forbo Click Underlay
	Slip resistance	EN 13893	Class DS
	Thermal conductioning	EN 12524	0.25 W/mk
	Body voltage	EN 1815	≤ 2 kV

Czech & Slovak Republic

Forbo s.r.o.
Novodvorská 994
142 21 Praha 4
Česká republika
Tel.: + 420 239 043 011
Fax: + 420 239 043 012
E-mail: info@forbo.cz
www.forbo-flooring.cz

Hong Kong & Macau

Flooring Systems
Forbo Flooring
E-mail: info.flooring.hk@forbo.com
www.forbo-flooring.com

Poland

Forbo Flooring
ul. Wolsztyńska 2
60-361 Poznań
Poland
Tel.: +48 (61) 862 13 82
Fax: +48 (61) 622 71 75
E-Mail: info@forbo-flooring.pl
www.forbo-flooring.pl
Infolinea: 0800 46 46 49

Portugal

Forbo-Revestimentos, SA
Zona Industrial da Maia I, Sector VII
Tv. Eng. Nobre da Costa, 87
Apartado 6091
4476-908 Maia
Tel.: +351 22 999 69 00
Fax: +351 22 999 69 09
e-mail: info.revestimentos@forbo.com
Visit: www.forbo-flooring.com.pt

Russia

Forbo Flooring Russia
19, Leninskaya sloboda, of.29
115280, Moscow, Russia
Tel.: 007495 775 18 21
Fax: 007 495 775 18 25
E-mail: moscow-office@forbo.com
www.forbo.ru
www.forbo-flooring.ru

Other countries

Forbo Flooring B.V.
P.O. Box 13
1560 AA Krommenie
The Netherlands
Tel.: +31 75 647 74 77
Fax: +31 75 647 77 01
E-mail: contact@forbo.com
www.forbo-flooring.com



Forbo

FLOORING SYSTEMS

creating better environments