

Product quick info

**FLT+ U30 NP/GL-NA-HACCP
blue FDA**

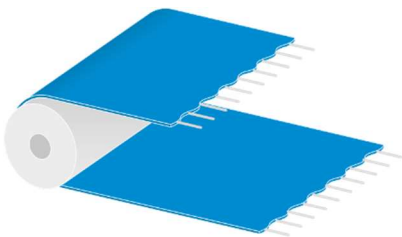
Sketch of cross-section (not actual size)

Applications

- Meat, Poultry and Seafood processing
- Vegetable and fruit processing
- Incline Conveying
- Applications with high positioning accuracy

Properties/Advantages

- Smooth surface (GL) top surface => good product grip, optimal hygiene
- Inverted pyramid surface (NP) driving face => reduced friction when running over stainless steel tables, optimum water displacement
- HACCP design
- Laterally flexible and troughable
- Tension member material Aramid cords => higher k1% value and minimum elongation
- Non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to EU and FDA, MHLW 370 is pending

**Basic technical data**

Top face	Polyurethane, GL
Underside	Polyurethane, NP
Article no.	640024
d _{min} [mm]	40
Total thickness [mm]	3.4
k _{1%} relaxed [N/mm width]	9
Weight [kg/m ²]	3.4
Permitted operating temperature [°C]	-10 to +70

Product Quick Info | EN | 11.2022

FMS · Reproduction of text or parts thereof only with our approval. Modifications reserved.

Forbo Siegling GmbH
 Lilienthalstrasse 6/8, D-30179 Hannover
 Phone +49 511 67 04 0
 www.forbo-siegling.com, siegling@forbo.com