

## Product quick info

**FLT U30 MT/NP-NA-HACCP BL  
FDA**

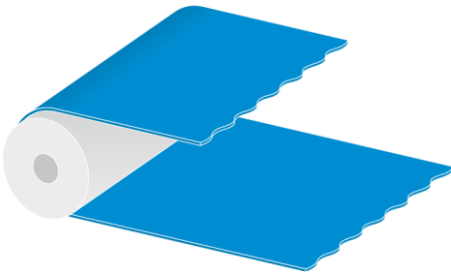
Sketch of cross-section (not actual size)

**Applications**

- Dough conveying
- Meat processing
- Fruit & vegetable processing

**Properties/Advantages**

- Top face: reduced product contact area and improved product release
- Driving face: very good cleanability and an easily scrapable surface
- HACCP design, very good cleanability
- Non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to EU, FDA 21 CFR and MHLW (No. 370)
- Laterally flexible and troughable

**Basic technical data**

|                                      |                  |
|--------------------------------------|------------------|
| Top face                             | Polyurethane, NP |
| Underside                            | Polyurethane, MT |
| Article no.                          | 640016           |
| d <sub>min</sub> [mm]                | 40               |
| Total thickness [mm]                 | 3.4              |
| k <sub>1%</sub> relaxed [N/mm width] | 1.75             |
| Weight [kg/m <sup>2</sup> ]          | 3.65             |
| Permitted operating temperature [°C] | -10 to +70       |

Product Quick Info | EN | 11.2024

FMS - Reproduction of text or parts thereof only with our approval. Modifications reserved.

Forbo Siegling GmbH  
 Lilienthalstrasse 6/8, D-30179 Hannover  
 Phone +49 511 67 04 0  
 www.forbo-siegling.com, siegling@forbo.com