


100 % adhesive free LVT



Product information

LVT Luxury Vinyl Tiles - loose lay installation



With a total thickness of 5 mm, this loose lay LVT floor covering is based on a 100 % non glued installation system with an angular click system along its length and flat on the end. It will be equipped with a 0.55 mm wear layer in transparent compact PVC abrasion group T and a glass mat reinforcement giving it perfect dimensional stability $\leq 0.05\%$ and excellent resistance to remanent punching ≤ 0.05 mm.

Finally, the product offers 15 dB acoustic efficiency via the addition of an acoustic underlay, is classified as Bfl-s1 according to the reaction to fire standard and will benefit from R10 slip resistance. Allura click pro will be available in 20 wood and mineral decors and 3 different formats.

Allura click pro is manufactured in Europe from guaranteed phthalate-free raw materials and includes 30% recycled content in its surface mass. With a 28-day VOC emission rate of $< 20 \mu\text{g}/\text{m}^3$, it is classified A+.

Its free-standing installation allows for quick installation and removal and easy recycling at the end of its life. Furthermore, Allura click pro can be installed on new or renovation supports, as a covering solution on existing supports such as tiles, compact and acoustic PVC ⁽¹⁾, including asbestos under certain conditions ⁽²⁾ (including kitchens) and up to 1,000 m² without any joints and without any installation constraint in front of windows ⁽¹⁾.

It will have a polyurethane (PUR) surface protection that will protect it from scratches and stains over time, facilitate its maintenance and avoid the application of a metal coating throughout its life.


It will benefit from a 7-year warranty and can be extended up to 6 additional years ⁽³⁾ (depending on the conditions of use of the manufacturer's Coral or Nuway mats).

Our floor coverings (installation and removal scraps) can be recycled via our Tack back programme Tournesol.

allura click pro

CLICK CONNECTED

- Clickable solution for any area up to 1000 m²
- Suitable for use with uneven subfloors and is genuinely adhesive free
- Balanced product that will perform over time

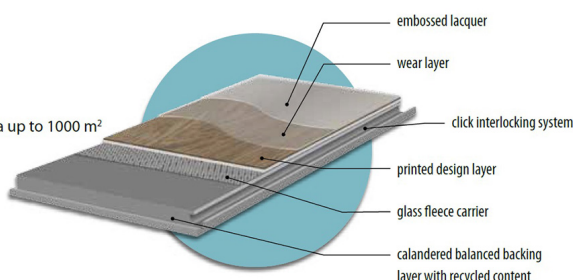

Technical specifications

Commercial name	Allura click pro
Total thickness	5,00 mm
Wearlayer	0,55 mm
Total weight	8 300 g/m²
Impact sound reduction	$\Delta L_w = 7$ dB
Residual indentation	$\leq 0,05$ mm
Reaction to fire	Bfl-s1 - n°2018/131-1(CRET)
Commercial use	33

Environmental datasheet

- EPD is available on Forbo's website
- Phthalate free
- TVOC emission rate $< 20 \mu\text{g}/\text{m}^3$, class A+ (best class in health safety labelling)
- Free from all restricted substances (formaldehyde, pentachlorophenol, heavy metals, CMR 1A and 1B); compliant with European REACH regulation
- 100% recyclable
- Made from 30% natural resource materials
- Product without glue installation

⁽¹⁾ Refer to the installation instructions and technical notices and only in private areas of the house

⁽²⁾ In compliance with the regulations in force

⁽³⁾ The extended warranty can be applied from the 2nd ML of Coral® Carpet or the installation of a Nuway® system depending on traffic