

## ENVIRONMENTAL PRODUCT DECLARATION

# FLOTEX TILE

FORBO FLOORING SYSTEMS  
FLOCKED FLOOR COVERING



### FLOORING SYSTEMS

Flotex combines the practicality of resilient flooring with the slip resistant and acoustic properties usually associated with textiles. Being completely waterproof, Flotex is also the only truly washable textile floor covering. Flotex is available in a large variety of designs. Alongside our traditionally printed designs, we can digitally print any desired design, offering our customers truly tailor-made flooring.

Forbo was the first flooring manufacturer to publish a complete Life Cycle Assessment (LCA) report verified by CML in 2000. In addition, Forbo is now publishing Environmental Product Declarations (EPD) for all products including full LCA reports. This EPD was developed using recognized flooring Product Category Rules and includes additional information to show the impacts on human health and eco-toxicity. By offering the complete story we hope that our stakeholders will be able to use this document as a tool that will translate the environmental performance of Flotex into true value and benefits for all our customers and stakeholders alike.

For more information visit:  
[www.forbo-flooring.com](http://www.forbo-flooring.com)





FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

This declaration is an environmental product declaration in accordance with ISO 14025 and EN15804 that describes the environmental characteristics of the aforementioned product. It promotes the development of sustainable products. This is a certified declaration and all relevant environmental information is disclosed. This EPD may not be comparable to other declarations if they do not comply with ISO 14025, EN 15804 and the reference PCR.



PROGRAM OPERATOR	UL Environment 333 Pfingsten Road Northbrook, IL 60611
DECLARATION HOLDER	Forbo Flooring B.V. Industrieweg 12 P.O. Box 13 NL-1560 AA Krommenie
DECLARATION NUMBER	12CA64879.105.1
DECLARED PRODUCT	Flotex Tile
REFERENCE PCR	Flooring: Carpet, Resilient, Laminate, Ceramic, and Wood (NSF 2012)
DATE OF ISSUE	13 June 2013
PERIOD OF VALIDITY	5 Years
CONTENTS OF THE DECLARATION	Product definition and information about building physics Information about basic material and the material's origin Description of the product's manufacture Indication of product processing Information about the in-use conditions Life cycle assessment results Testing results and verifications
The PCR review was conducted by:	NSF International
	Accepted by PCR Review Panel
	ncss@nsf.org
This declaration was independently verified in accordance with ISO 14025 and EN 15804 by Underwriters Laboratories <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	
	Loretta Tam, ULE EPD Program Manager
This life cycle assessment was independently verified in accordance with ISO 14044, EN 15804 and the reference PCR by:	
	Trisha Montalbo, PE International



Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

Product Definition


Product Classification and description

This declaration covers a broad range of designs and colors. Flotex Tile is comprised of a polyamide 6.6 pile above a glass fibre reinforced recycled backing. Flotex Tile complies with all requirements of EN1307: Textile Floor Coverings - Classification of Pile Carpets.

Flotex Tile has been manufactured for over 25 years and is a well-known brand sold worldwide.

Flotex Tile is built up in 5 layers as illustrated in the following image:

Figure 1: Illustration of Flotex Tile

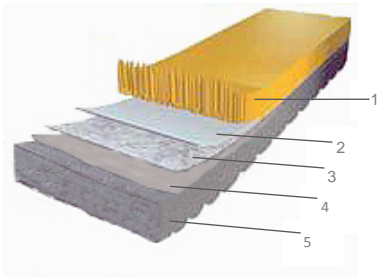

- 1. **Surface layer:** This layer gives Flotex Sheet its design, colour and wear properties
- 2. **Adhesive layer:** This layer bonds the surface layer to the backing
- 3. **Glass fibre layer:** This layer provides strength and dimensional stability to the product
- 4. **Lamination layer:** This layer bonds the recycled backing to the tile-top
- 5. **Recycled backing layer:** This layer is composed of recycled carpet/vinyl waste

Range of application

Flotex tile is classified in accordance with EN1307 to be installed in the following use areas defined in EN-ISO 10874:

Area of application	Flotex Tile
Domestic	<div>Class 23</div>
Commercial	<div>Class 33</div>





FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

## Product Standards

The product considered in this EPD has the following technical specifications:

- Meets or exceeds all requirements of EN1307: Textile Floor Coverings - Classification of Pile Carpets.



Flotex Sheet meets the requirements of EN 14041

EN 13501-1	Reaction to fire	B <sub>fl</sub> - s1
EN 13893	Slip resistance	DS: ≥ 0.30
EN 1815	Body voltage	< 2 kV
ISO 8302	Thermal conductivity	0.04 m <sup>2</sup> K/W

Fire Testing:

- Class 1 when tested in accordance with ASTM E 648/NFPA 253, Standard Test Method for Critical Radiant Flux.
- Meets 450 or less when tested in accordance with ASTM E 662/NFPA 258, Standard Test Method for Smoke Density.

## Accreditations

- ISO 9001 Quality Management System
- ISO 14001 Environmental Management System
- BREEAM
- Oeko-Tex
- British Allergy Foundation
- Ü Mark
- French act Grenelle: A+



© Registered trade mark of  
National Asthma Council Australia



Certificate No. EMS 32833



Certificate No. FM 00632





FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

## Delivery Status

Table 1: Specification of delivered product

Characteristics	Nominal Value	Unit
Product thickness	5.3	mm
Product Weight	4540	g/m <sup>2</sup>
Tile Dimension	0.5	m <sup>2</sup>

## Material Content

Table 2: Composition of Flotex Tile

Component	Material	Mass %	Availability	Origin of raw material
Polymer	Emulsion PVC	13.13	Non-renewable	Europe
Plasticizer	DINP	9.53	Non-renewable	Europe
Filler	Calcium Carbonate	8.31	Abundant mineral	Europe
Substrate	Glass tissue	3.08	Non-renewable	Europe
Reinforcement	Glass net	0.42	Non-renewable	Europe
Carpet Pile	Polyamide 6.6	5.50	Non-renewable	Europe/USA
Fire Retardant	Aluminium trihydrate	0.46	Non-renewable	Europe/Asia
Heat stabilizer	Zinc stearate	0.11	Non-renewable	Europe
Recycled Backing	Carpet/vinyl waste	59.00	Post Industrial	Europe
Additives	Various chemicals	0.46	Non-renewable	Europe/Asia

## Production of Main Materials

**Emulsion PVC:** Polymer which is manufactured by the polymerisation of vinyl chloride monomer.

**DINP:** Plasticiser manufactured by the reaction of phthalic anhydride and alcohol. Plasticizer is added to increase the flexibility, durability and longevity of the floor covering.

**Calcium carbonate:** An abundant mineral found in all parts of the world as the chief substance in rocks (i.e., marble and limestone). It can be ground to varying particle sizes and is widely used as filler.

**Glass Tissue:** A non-woven sheet material comprising chopped glass fiber filaments bound together with a binder. Imparts dimensional stability and lay-flat properties.

**Glass net:** A non-woven grid structure comprising glass filament yarn bound together with a binder. Increases tear resistance of finished flooring.

**Nylon 6.6:** Synthetic yarn made from the condensation reaction of hexamethylene diamine and adipic acid. Forms the pile surface of Flotex and gives excellent abrasion resistance and durability..

**Alumina trihydrate:** Fire retardant filler obtained by extracting aluminium hydroxide from Bauxite which is naturally occurring in the Earth's surface. Imparts fire retardance of Flotex sheet.

**Heat stabilizer:** Heat Stabilizer based on Zinc stearate. It is used to avoid PVC degradation during processing at relative high temperature.

**Recycled backing:** Blend of waste carpet and vinyl floor coverings, which gives approximately 59% recycled content by weight in the finished tile product.

**Various chemicals:** Minor components including - antistatic agent, pigment, inhibitor.

## Production of the Floor Covering

### Flotex manufacturing process at Ripley

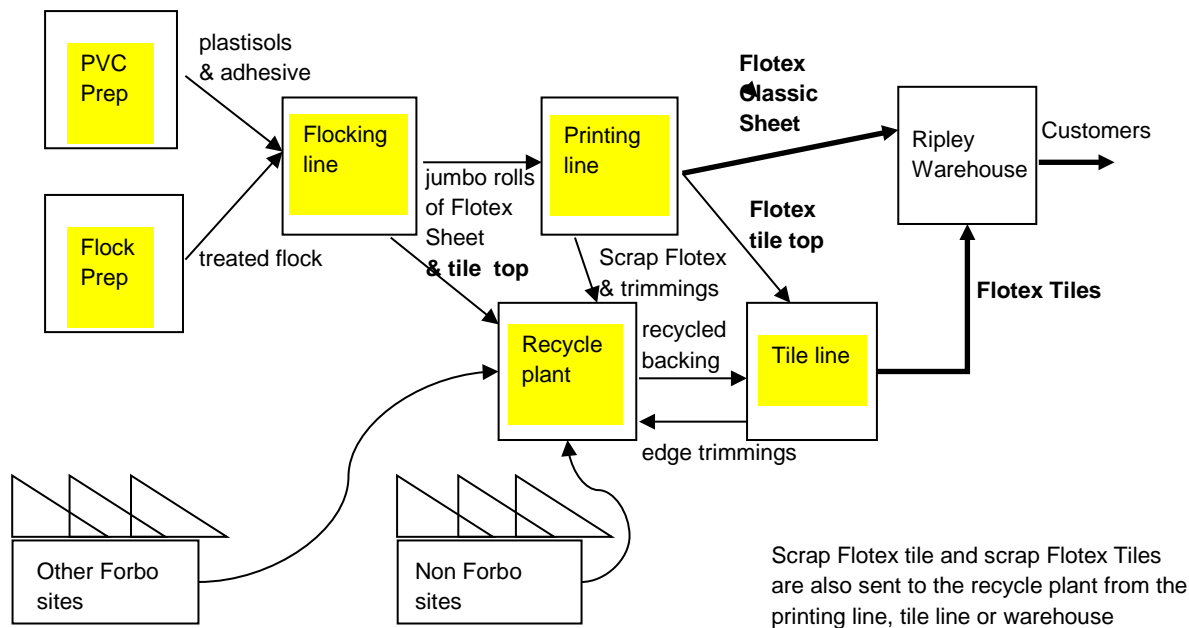


Figure 2: Illustration of the Production process

Flotex Tile is produced in several stages starting with *PVC Prep*, where the compounding of PVC emulsion polymers with plasticiser and other functional additives is carried out to produce various PVC plastisols. These plastisols are then spread-coated onto a glass substrate on the *Flocking Line*. The top surface of Flotex Tile is based on Nylon-6.6 tow, which is cut into 2mm fibres in the *Flock Prep* area. These fibres are scoured and dyed to give the desired colour base shade before electrostatically flocking into the wet PVC plastisol on the *Flocking Line*. The flocked fibres form the surface pile of Flotex Tile. After flocking, the plastisols are fully cured at elevated temperature on the *Flocking Line*.

The finished tile-top is processed on the Ripley *Printing Line* where specific designs can be applied to the surface layer using a rotary screen technique. The printed carpet is steamed to fix dyestuffs then washed and dried.

In the *Recycle Plant* waste carpet and vinyl are processed to produce a recycled backing layer. The recycled backing is then laminated to the printed tile-top sheet on the *Tile Line*. After final curing, the tile material is cooled before cutting into 0.5m<sup>2</sup> tiles. The tiles are then automatically boxed and palletized. All product trimmings and any rejected finished product are recycled in-house.

### Health, Safety and Environmental Aspects during Production

- ISO 14001 Environmental Management System



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

## Production Waste

Rejected material and the cuttings of the trimming stage are being reused in the manufacturing process. Packaging materials are being collected separately and externally recycled.

## Delivery and Installation of the Floor Covering

### Delivery

A worldwide distribution by truck and container ship is considered. On average every square meter of Flotex Tile is transported as follows:

- |  |        |
|--|--------|
| ○ Transport distance 40 t truck                      | 760 km |
| ○ Transport distance 7.5t truck (Fine distribution)  | 246 km |
| ○ Capacity utilization trucks (including empty runs) | 85 %   |
| ○ Transport distance Ocean ship                      | 0 km   |
| ○ Capacity utilization Ocean ship                    | 48%    |

Since Flotex tile is mainly sold in Europe on average there is no significant transport distance for the distribution of Flotex tile by Ocean ship.

### Installation

Because of the specific techniques used during the installation of Flotex Tile approximately 2% of the material is cut off as installation waste. For installation of Flotex Tile on the floor a scenario has been modeled assuming an amount 0.05 kg/m<sup>2</sup> of flooring tackifier is applied to the sub-floor.

Waste during the installation process may be recycled as floor covering through the manufacturers' facilities or thermally recycled in a waste incineration plant. Since the major part of Flotex tile is sold in Europe the European electricity grid mix is used in the calculations for the energy recovery during incineration.

### Health, Safety and Environmental Aspects during Installation

Forbo flooring recommends to use (low) zero emission adhesives for installing Flotex Tile.

### Waste

Waste during the installation process may be recycled as floor covering through the manufacturers' facilities or recycled/disposed of according to local regulations.

### Packaging

Cardboard boxes and PE-foil can be collected separately and should be used in a local recycling process. The wooden pallets can be reused.



Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## Use stage

The service lifetime of a floor covering for a certain application on a floor is too widespread to give one common number. For this EPD model the reference service lifetime (RSL) is set to one year. This means that all impacts for the use phase are based on the cleaning and maintenance model for one year. Depending on the area of use, the technical lifetime advised by the manufacturer and the estimated time on the floor by the customer, the service lifetime can be determined. The use phase impacts should be calculated with the foreseen service life to arrive at the total environmental impact.

### Cleaning and Maintenance

Level of use	Cleaning Process	Cleaning Frequency	Consumption of energy and resources
Commercial/Residential	Vacuuming	Twice a week	Electricity
	Wet Cleaning	Once a week	Hot water Neutral detergent

For the calculations the following cleaning regime is considered:

- Dry cleaning with a 1.5 kW vacuum cleaner for 0.21 min/m<sup>2</sup>, twice a week. This equates to 0.55 kWh/m<sup>2</sup>\*year.
- Once a week wet cleaning with 0.062 l/m<sup>2</sup> water and 0.0008 kg/m<sup>2</sup> detergent. This result in the use of 3.224 l/m<sup>2</sup>\*year water and 0.04 kg/m<sup>2</sup>\*year detergent. The wet cleaning takes place without power machine usage. Waste water treatment of the arising waste water from cleaning is considered (Data sourced from Forbo GABI model).

The cleaning regime that is recommended in practice will be highly dependent on the use of the premises where the floor covering is installed. In high traffic areas more frequent cleaning will be needed compared to areas where there is low traffic. The use of an entrance mat of at least four steps will reduce the cleaning frequency.

The cleaning regime used in the calculations is suitable for high traffic areas.

### Prevention of Structural Damage

All newly laid floor covering should be covered and protected with a suitable non-staining protective covering if other building activities are still in progress. Castor wheels should be suitable for textile floor coverings.

### Health Aspects during Usage

Flotex Tile is complying with:

- AgBB/DIBt requirements
- French act Grenelle: A+
- CHPS section 01350
- Oeko-tex
- British Allergy Foundation

## End of Life

The deconstruction of installed Flotex tile from the floor is done manually, since the tiles are installed using a tackifier. For the end of life stage, 100% landfill is taken into account with an average distance to the landfill facility by lorry of 200 km.



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

## Life Cycle Assessment

A full Life Cycle Assessment has been carried out according to ISO 14040 and ISO 14044.

The following Life Cycle Stages are assessed :

- Production Stage (Raw material acquisition, transportation to Manufacturing and Manufacturing)
- Transport Gate to User
- Installation Stage
- Use Stage
- End of Life Stage

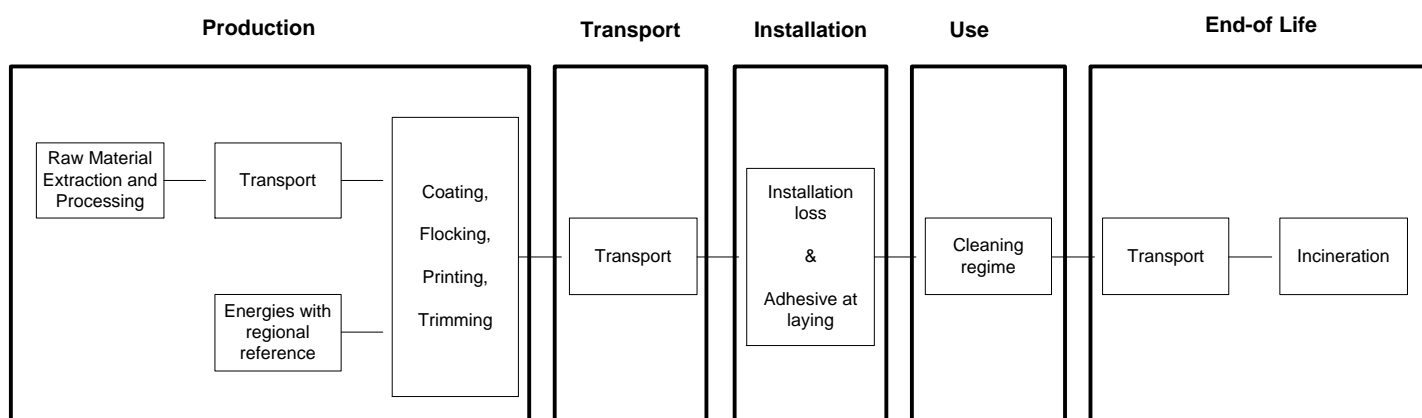


Figure 3: Flow chart of the Life Cycle Assessment

## Description of the Declared Functional Unit

The functional unit is one square meter of installed product and the use stage is considered for one year of service life.

## Cut off Criteria

The cut-off criteria shall be 1% of renewable and non-renewable primary energy usage and 1% of the total mass of the unit process. The total neglected input flows per module shall be a maximum of 5% of energy usage and mass.

In practice, in this assessment, all data from the production data acquisition are considered, i.e. all raw materials used as per formulation, use of water, electricity and other fuels, the required packaging materials, and all direct production waste. Transport data on all considered inputs and output material are also considered.

## Allocations

In the present study some allocations have been made. Detailed explanations can be found in the chapters below.

## Co-product allocation

No co-product allocation occurs in the product system.

## Allocation of multi-input processes

The Production and End of Life stage include incineration plants. In these processes different products are treated together within a process. The allocation procedures followed in these cases are based on a physical classification of



Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

the mass flows or calorific values.

Credits from energy substitution are allocated to the production stage, because the gained energy from energy substitution is lower than the energy input in this stage. The same quality of energy is considered.

### Allocation procedure of reuse, recycling and recovery

The installation waste and end of life waste is fed into incineration processes. Incineration processes include cogeneration processes which give thermal and power energy as outputs. It is assumed that this recovered energy offsets that produced by the European average grid mix and thermal energy generation from natural gas.

### Description of the allocation processes in the LCA report

The description of allocation rules in of this LCA report meets the requirements of the PCR.

### Background Data

As a general rule, specific data derived from specific production processes or average data derived from specific production processes have been used as the first choice as a basis for calculating an EPD.

For life cycle modeling of the considered products, the GaBi 6 Software System for Life Cycle Engineering, developed by PE INTERNATIONAL AG has been used. All relevant LCA datasets are taken from the GaBi 6 software database. The datasets from the database GaBi are documented in the online documentation. To ensure comparability of results in the LCA, the basic data of GaBi database were used for energy, transportation and auxiliary materials.

### Data Quality

The requirements for data quality and LCA data correspond to the specifications of the PCR.

Foreground data are based on 1 year averaged data (year 2012). The reference ages of LCA datasets vary but are given in the table in the Appendix. The time period over which inputs to and outputs from the system is accounted for is 100 years from the year for which the data set is deemed representative. The technological LCA of the collected data reflects the physical reality of the declared product. The datasets are complete, conform to the system boundaries and the criteria for the exclusion of inputs and outputs and are geographical representative for the supply chain of Forbo flooring.

For life cycle modeling of the considered products the GaBi 6 Software System for Life Cycle Engineering, developed by PE INTERNATIONAL AG, is used. All relevant LCA datasets are taken from the GaBi 6 software database. The last revision of the used data sets took place within the last 10 years.

### System Boundaries

Production Stage includes provision of all materials, products and energy, packaging processing and its transport, as well as waste processing up to the end-of waste state or disposal of final residues during the product stage.

Transport and Installation Stage includes provision of all materials, products and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction stage. These information modules also include all impacts and aspects related to any losses during this construction stage (i.e. production, transport, and waste processing and disposal of the lost products and materials). For the transportation a worldwide distribution is considered.

Use Stage includes provision and transport of all materials, products and related energy and water use, as well as waste processing up to the end-of-waste state or disposal of final residues during this part of the use stage. These information modules also include all impacts and aspects related to the losses during this part of the use stage (i.e.



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

production, transport, and waste processing and disposal of the lost products and materials).

End of Life Stage includes provision and all transports, provision of all materials, products and related energy and water use. It also includes any declared benefits and loads from net flows leaving the product system that have not been allocated as co-products and that have passed the end-of-waste state in the form of reuse, recovery and/or recycling potentials.

### Power mix

The selection of LCA data for the electricity generation is in line with the PCR.

The products are manufactured in Ripley, the United Kingdom. The GaBi 6 Hydropower, Biomass and Windpower datasets have therefore been used (reference year 2009). The energy supplier is providing Forbo with a certificate every year.

### CO<sub>2</sub>-Certificates

No CO<sub>2</sub>-certificates are considered in this study.

### Life Cycle Inventory Analysis

The total primary energy for one square meter installed Flotex tile is presented in table 3 their specific energy resources.

Table 3: Primary energy for all life cycle stages for Flotex tile for one year

Non-renewable primary energy by resources	Unit	Total Life cycle MJ	Total Life cycle %	Production	Transport	Installation	Use (1 yr)	End of Life
Total non renewable primary energy	MJ	236.58	100	216.58	3.10	6.60	5.84	4.74
Crude oil	MJ	71.79	30	62.89	2.84	2.76	0.63	2.66
Hard coal	MJ	8.88	4	7.73	0.01	0.06	0.98	0.11
Lignite	MJ	7.83	3	6.89	0.01	0.11	0.74	0.08
Natural gas	MJ	137.93	58	130.44	0.24	3.71	1.74	1.81
Uranium	MJ	10.42	5	8.63	0.01	-0.04	1.74	0.08
Renewable primary energy by resources	Unit	Total Life cycle MJ	Total Life cycle %	Production	Transport	Installation	Use (1 yr)	End of Life
Total renewable primary energy	MJ	7.01	100	6.04	0.12	0.03	0.79	0.03
Geothermal	MJ	0.06	1	0.05	0.00	0.00	0.01	0.00
Hydro power	MJ	1.21	17	0.94	0.00	-0.02	0.32	-0.02
Solar energy	MJ	4.25	61	3.79	0.12	0.04	0.23	0.07
Wind power	MJ	1.48	21	1.25	0.00	0.02	0.23	-0.02

The total amount of renewable and non-renewable primary energy is predominated by the production stage for a one year usage; within the production stage the main contributors are the raw material production and energy generation.



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

## Waste and non-renewable resource consumption

In table 4 the non-renewable resource consumption and waste production is shown for all life cycle stages for a one year usage.

Table 4: Waste categories and non renewable resources for Flotex tile (one year)

Wastes	Unit	Total Life cycle	Production	Transport	Installation	Use (1yr)	End of Life
Hazardous waste	[kg]	8.19E-03	5.26E-03	0.00E+00	2.93E-03	0.00E+00	0.00E+00
Non-hazardous waste	[kg]	1.68E+01	1.06E+01	1.10E-02	2.52E-01	1.12E+00	4.77E+00
Radioactive waste	[kg]	4.00E-03	3.29E-03	4.30E-06	1.53E-05	7.12E-04	1.26E-05
Resources	Unit	Total Life cycle	Production	Transport	Installation	Use (1yr)	End of Life
Non renewable resources	[kg]	14.02	11.74	0.01	0.23	1.13	0.91

## Life Cycle Assessment

In table 5 the environmental impacts for one lifecycle is presented for Flotex tile. In tables 6 the environmental impacts are presented for all the lifecycle stages.

Table 5: Results of the LCA – Environmental impacts one lifecycle (one year) – Flotex tile

Impact Category : CML 2001 – Nov. 2010	Flotex tile	Unit
Global Warming Potential (GWP 100 years)	1.36E+01	kg CO2-Equiv.
Ozone Layer Depletion Potential (ODP, steady state)	1.49E-07	kg R11-Equiv.
Acidification Potential (AP)	1.93E-02	kg SO2-Equiv.
Eutrophication Potential (EP)	3.11E-03	kg Phosphate-Equiv.
Photochem. Ozone Creation Potential (POCP)	9.76E-03	kg Ethene-Equiv.
Abiotic Depletion Potential Elements (ADPE)	4.63E-03	kg Sb-Equiv.
Abiotic Depletion Potential Fossil (ADPF)	2.32E+02	[MJ]

Table 6: Results of the LCA – Environmental impact for Flotex tile (one year)

Impact Category : CML 2001 – Nov. 2010	Unit	Production	Transport	Installation	Use (1yr)	End of Life
Global Warming Potential	kg CO2-Equiv.	1.15E+01	4.27E-01	4.77E-01	3.22E-01	8.52E-01
Ozone Layer Depletion Potential	kg R11-Equiv.	1.36E-07	3.91E-12	5.04E-10	2.30E-09	1.06E-08
Acidification Potential	kg SO2-Equiv.	1.50E-02	9.33E-04	7.23E-04	1.35E-03	1.26E-03
Eutrophication Potential	kg PSO4-Equiv.	2.48E-03	2.13E-04	9.33E-05	8.29E-05	2.34E-04
Photochem. Ozone Creation Potential	kg Ethene-Equiv.	9.57E-03	-3.22E-04	1.64E-04	9.17E-05	2.58E-04
Abiotic Depletion Elements	kg Sb-Equiv.	4.63E-03	8.33E-09	1.05E-07	6.36E-08	3.09E-08
Abiotic Depletion Fossil	MJ	2.11E+02	3.10E+00	6.60E+00	5.78E+00	4.56E+00

The relative contribution of each process stage to each impact category for Flotex tile is shown in figure 4.




FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

Figure 4: relative contribution of each process stage to each impact category for Flotex tile for a one year usage.

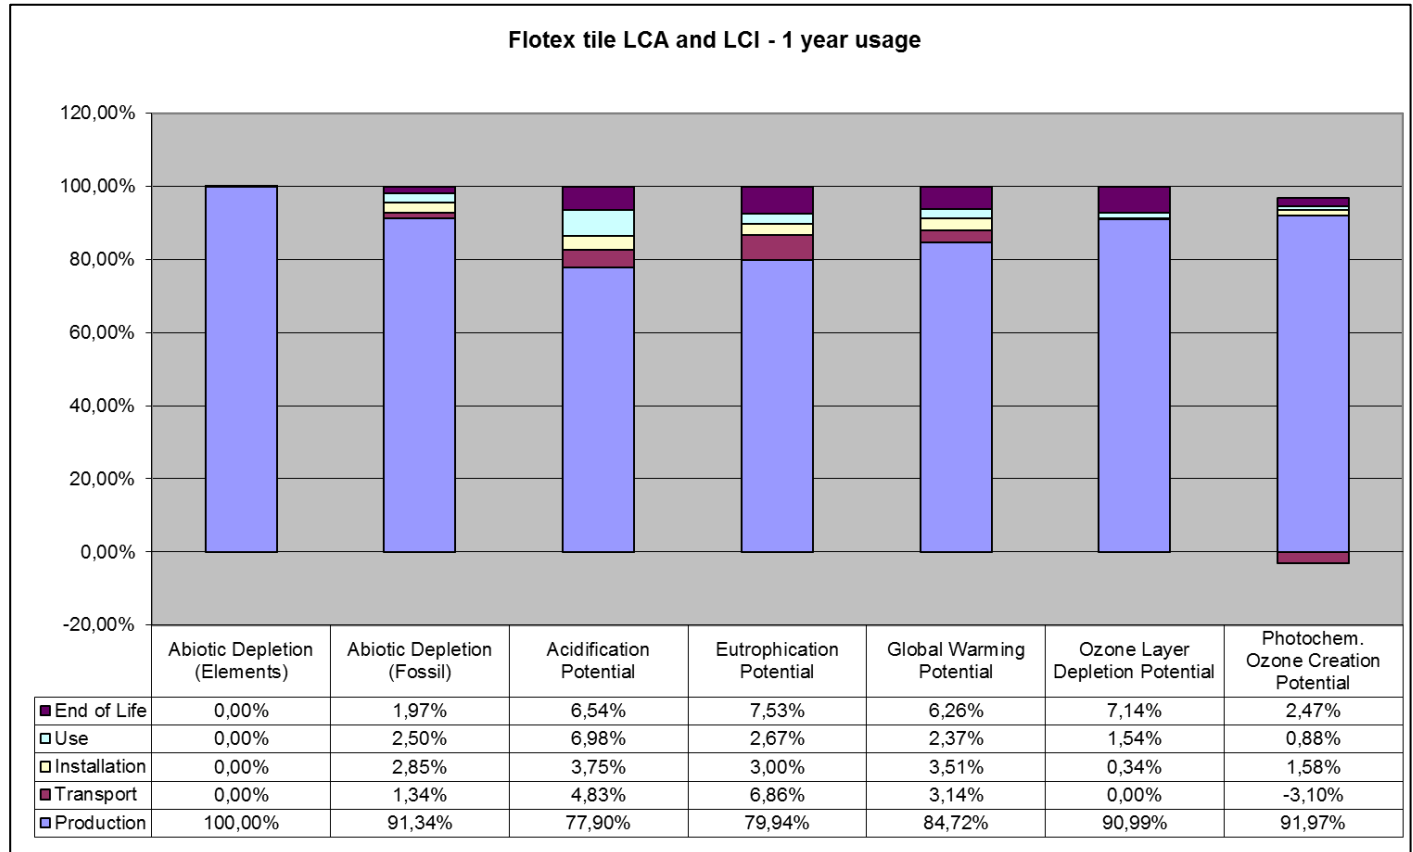

## Interpretation

The interpretation of the results has been carried out considering the assumptions and limitations declared in the EPD, both methodology- and data-related for a one year usage.

In all impact categories the production stage has the main contribution, between 77 and 100% of the total overall impact. For most of the categories the main contributor in the production stage is the Raw material supply with a share of more than 78% of total impacts from the production stage. Only for the POCP the share of the Forbo manufacturing is significant with a share of 81%.

In the transport stage AP, EP and GWP are having a considerable bigger impact than the other categories, for the POCP there is a credit in this life cycle stage. The main contributors to the impacts of these 4 categories are the trucks used for the trunking and fine distribution of Flotex tile to the user.

For GWP, AP, EP and ADPF the adhesive for the flooring installation has a minor impact of approximately 3% of the total. Also for the use stage these are the main impact categories, mainly caused by the use of electricity for cleaning.

At the End of Life stage the main impacts are AP, EP, GWP and ODP, this is due to the fact that a 100% landfill is considered in the calculation.



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

## Additional Environmental Information

To be fully transparent Forbo Flooring does not only want to declare the environmental impacts required in the PCR, but also the impacts on human health and eco-toxicity. Furthermore the outcome of the calculations according to the European Standard EN15804 are published in this section.

### Toxicity

For this calculations the USEtox™ model is used as being the globally recommended preferred model for characterization modelling of human and eco-toxic impacts in LCIA by the United Nations Environment Programme SETAC Life Cycle Initiative.

According to the "ILCD Handbook: Recommendations for Life Cycle Impact Assessment in the European context" the recommended characterization models and associated characterization factors are classified according to their quality into three levels:

- Level I (recommended and satisfactory),
- level II (recommended but in need of some improvements)
- level III (recommended, but to be applied with caution).

A mixed classification sometimes is related to the application of the classified method to different types of substances. USEtox™ is classified as Level II / III, unlike for example the CML impact categories which are classified as Level I.

Table 7: Results of the LCA – Environmental impacts one lifecycle (one year) – Flotex tile

Impact Category : USEtox	Flotex tile	Unit
Ecotoxicity	5.89E-01	PAF m3.day
Human toxicity, cancer	7.18E-09	Cases
Human toxicity, non-canc.	7.97E-07	Cases

In the following table the impacts are subdivided into the lifecycle stages.

Table 8 Results of the LCA – Environmental impact for Flotex tile (one year)

Impact Category : USEtox	Unit	Production	Transport	Installation	Use (1yr)	End of Life
Ecotoxicity	PAF m3.day	4.98E-01	2.79E-02	6.49E-03	2.78E-02	2.90E-02
Human toxicity, cancer	cases	6.62E-09	1.16E-10	1.24E-10	2.66E-10	5.43E-11
Human toxicity, non-canc.	cases	6.35E-07	5.47E-08	8.13E-09	5.50E-08	4.42E-08

### Interpretation

The interpretation of the results has been carried out considering the assumptions and limitations declared in the EPD, both methodology- and data-related for a one year usage.

In all the Toxicity categories the production stage has the main contribution of the total overall impact, this is mainly caused by the Raw material supply which is responsible for 81 – 93% of the toxicity impacts in this life cycle stage.

In the transport stage almost 100% of the impacts are caused by the diesel used for the trucks.

Another stage with a significant impact is the Use stage for all three impact categories. This is mainly due to the use of electricity for the cleaning of the floor. The used cleaning regime of vacuuming twice a week is very conservative and will in practice most of the times be lower.

At the End of Life stage the main impacts are Eco toxicity and Human toxicity (non-canc.), this is due to the fact that a



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

100% landfill is considered in the calculation.

### EN15804 Results

In this section the calculations have been conducted and verified according to the requirements of the European Standard EN 15804. In addition, calculations followed the document "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report", however, Part A was not included as a part of the verification.

Table 9: Results of the LCA – Environmental impact for Flotex tile (one year)

Parameter	Unit	Manufacturing	Installation		Use (1yr)	End of Life			Credits
		A1-3	A4	A5	B2	C1	C2	C3	D
GWP	[kg CO <sub>2</sub> -Equiv.]	1,15E+01	4,27E-01	5,85E-01	3,22E-01	1,44E-02	1,23E-01	7,76E-01	-1,70E-01
ODP	[kg CFC11-Equiv.]	1.36E-07	3.91E-12	5.46E-10	2.30E-09	1.30E-11	2.16E-12	1.07E-08	-9.79E-11
AP	[kg SO <sub>2</sub> -Equiv.]	1.50E-02	9.33E-04	9.89E-04	1.35E-03	6.84E-05	6.20E-04	8.68E-04	-5.59E-04
EP	[kg PO <sub>4</sub> <sup>3-</sup> -Equiv.]	2.48E-03	2.13E-04	1.11E-04	8.29E-05	3.60E-06	1.43E-04	1.03E-04	-3.33E-05
POCP	[kg Ethen-Equiv.]	9.57E-03	-3.22E-04	1.86E-04	9.17E-05	4.03E-06	6.90E-05	2.02E-04	-3.89E-05
ADPE	[kg Sb-Equiv.]	4.63E-03	8.33E-09	1.14E-07	6.36E-08	1.99E-09	4.60E-09	3.29E-08	-1.72E-08
ADPF	[MJ]	2,11E+02	3,10E+00	8,42E+00	5,78E+00	2,54E-01	1,71E+00	3,69E+00	-2,91E+00

GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non fossil resources; ADPF = Abiotic depletion potential for fossil resources

Table 10: Results of the LCA – Resource use for Flotex tile (one year)

Parameter	Unit	Manufacturing	Installation		Use (1yr)	End of Life			Credits
		A1-3	A4	A5	B2	C1	C2	C3	D
PERE	[MJ]	-	-	-	-	-	-	-	-
PERM	[MJ]	-	-	-	-	-	-	-	-
PERT	[MJ]	5.94	0.12	0.17	0.79	0.04	0.07	0.10	-0.32
PENRE	[MJ]	-	-	-	-	-	-	-	-
PENRM	[MJ]	-	-	-	-	-	-	-	-
PENRT	[MJ]	215	3.1	8.43	5.84	0.26	1.71	3.87	-2.92
SM	[kg]	0	-	-	-	-	-	-	-
RSF	[MJ]	1.85E-03	1.95E-05	2.53E-04	9.54E-05	5.20E-06	1.08E-05	2.19E-03	-4.82E-05
NRSF	[MJ]	1.93E-02	2.05E-04	2.24E-03	9.99E-04	5.45E-05	1.13E-04	3.17E-03	-5.05E-04
FW	[m <sup>3</sup> ]	2.66E+01	1.34E-01	2.06E+00	5.28E+00	1.14E-01	7.43E-02	4.51E+00	-8.76E-01

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Use of net fresh water



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

Table 11: Results of the LCA – Output flows and Waste categories for Flotex tile 2.5 mm (one year)

Parameter	Unit	Manufacturing	Transport	Installation	Use (1yr)	End of Life/credits			
		A1-3	A4	A5	B2	C1	C2	C3	D
HWD	[kg]	5.26E-03	0.00E+00	2.93E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NHWD	[kg]	1.06E+01	1.10E-02	4.40E-01	1.12E+00	5.76E-02	6.08E-03	4.95E+00	-4.35E-01
RWD	[kg]	3.29E-03	4.30E-06	1.06E-04	7.12E-04	3.75E-05	2.38E-06	1.33E-04	-2.82E-04
CRU	[kg]	-	-	-	-	-	-	-	0.00E+00
MFR	[kg]	-	-	-	-	-	-	-	0.00E+00
MER	[kg]	-	-	-	-	-	-	-	0.00E+00
EE Power	[MJ]	-	-	9.45E-03	-	-	-	-	-
EE Thermal energy	[MJ]	-	-	0.00E+00	-	-	-	-	-

HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy per energy carrier

### Interpretation

The interpretation of the environmental impacts calculated according to EN 15804 are similar to the interpretation according to ISO 14025 on page 12. A more detailed interpretation is published in the appendix.



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 &amp; EN 15804

## References

GABi 6 2012	PE INTERNATIONAL AG; GaBi 6: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2012.
GABi 6 2012D	GaBi 6: Documentation of GaBi 6: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2012. <a href="http://documentation.gabi-software.com/">http://documentation.gabi-software.com/</a>
NSF International May 22, 2012 UL ENVIRONMENT ERFMI 2008	Product Category Rule for Environmental Product Declarations <i>Flooring: Carpet, Resilient, Laminate, Ceramic, Wood</i> UL Environment's Program Operator Rules Final report: LCA, Environmental Information Sheet and Ecodesign Model of Resilient Flooring by order of ERFMI, PE International, 2008
IBU 2011	PCR - Part A: Calculation rules for the Life Cycle Assessment and Requirements on the Background Report, Institut Bauen und Umwelt e.V.
PE 2012	Description of Selected Impact Categories, PE International AG, 2012
ILCD Handbook: General guide for Life Cycle Assessment - Detailed guidance	European Commission - Joint Research Centre - Institute for Environment and Sustainability: International Reference Life Cycle Data System (ILCD) Handbook - General guide for Life Cycle Assessment - Detailed guidance. First edition March 2010. EUR 24708 EN. Luxembourg. Publications Office of the European Union; 2010
<b>STANDARDS AND LAWS</b> DIN EN ISO 14044	Environmental management - Life cycle assessment - Requirements and guidelines (ISO 14044:2006); German and English version EN ISO 14044
ISO 14025 2006	DIN EN ISO 14025: Environmental labels and declarations — Type III environmental declarations — Principles and procedures
ISO 14040 2006	Environmental management - Life cycle assessment - Principles and framework (ISO 14040); German and English version EN ISO 14040
CEN/TR 15941	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; German version CEN/TR 15941
EN 15804	EN 15804: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products
ISO 24011 CPR	Resilient floor coverings - Specification for plain and decorative linoleum REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC
EN-ISO 10874	Resilient, textile and laminate floor coverings - Classification

# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

**Flotex Tile**  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## Appendix

---

The following life cycle assessment study of the company Forbo Flooring, a manufacturer of resilient floor coverings, has been performed by Forbo Flooring under support of PE International and has been conducted according to the requirements of the European Standard /EN 15804/ following the document "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report" /IBU 2011/.



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## LCA Report for Environmental Product Declarations (EPD)



FLOORING SYSTEMS

**Flotex Tile**

**Forbo Flooring**

Title of the study:

Environmental product declarations of Flotex Tile

Part of the project: Life Cycle assessment (LCA)

LCA study conducted by:

Forbo Flooring

Industrieweg 12

1566 JP Assendelft

The Netherlands

June 2013

Supported by:

PE INTERNATIONAL AG

# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## Authors:

Floris Zeitler, Forbo  
Supported by Peter Shonfield, Julia Goerke

Forbo Flooring BV

Industrieweg 12  
1566 JP Assendelft, The Netherlands  
Tel. +31 (0) 75 6477477  
Fax +31 (0) 75 6477707  
E-mail [floris.zeitler@forbo.com](mailto:floris.zeitler@forbo.com)  
Internet [www.forbo-flooring.com](http://www.forbo-flooring.com)

Supported by:

PE INTERNATIONAL AG  
Hauptstraße 111 – 115  
D – 70771 Leinfelden – Echterdingen  
Tel. +49 (0) 711 34 18 17 – 0  
Fax +49 (0) 711 34 18 17 – 25  
E-mail [info@pe-international.com](mailto:info@pe-international.com)  
Internet [www.pe-international.com](http://www.pe-international.com)

## Nomenclature

Abbreviation	Explanation
ADP	Abiotic Depletion Potential
AP	Acidification Potential
BLBSB	Benefits and Loads Beyond the System Boundary
CRU	Components for re-use
EE	Exported energy per energy carrier
EP	Eutrophication Potential
EPD	Environmental Product Declaration
FW	Use of net fresh water
GWP	Global Warming Potential
HWD	Hazardous waste disposed
LCA	Life Cycle Assessment
MER	Materials for energy recovery
MFR	Materials for recycling
NRSF	Use of non-renewable secondary fuels
ODP	Ozone Layer Depletion Potential
PENRE	Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials
PENRM	Use of non-renewable primary energy resources used as raw materials
PENRT	Total use of non-renewable primary energy resources
PERE	Use of renewable primary energy excluding renewable primary energy resources used as raw materials
PERM	Use of renewable primary energy resources used as raw materials
PERT	Total use of renewable primary energy resources
PCR	Product Category Rules
POCP	Photochemical Ozone Creation Potential
RSF	Use of renewable secondary fuels
RSL	Reference Service Life
RWD	Radioactive waste disposed
SM	Use of secondary material



## General

The present LCA study of the company Forbo Flooring, a manufacturer of resilient floor coverings, has been performed by Forbo Flooring under support of PE International and has been conducted according to the requirements of the European Standard EN15804 following the document "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report". The LCA report was sent to verification on 06/07/13.

## Scope

This document is the LCA report for the "Environmental Product Declaration" (EPD) of "Flotex tile". The provision of an LCA report is required for each EPD of the EPD-program holder (UL Environment). This document shows how the calculation rules were applied and describes additional LCA information on the Life Cycle Assessment in accordance with the requirements of ISO 14040 series.

## Content, structure and accessibility of the LCA report

The LCA report provides a systematic and comprehensive summary of the project documentation supporting the verification of an EPD. The report documents the information on which the Life Cycle Assessment is based, while also ensuring the additional information contained within the EPD complies with the requirements of ISO 14040 series. The LCA report contains all of the data and information of importance for the details published in the EPD. Care is given to all explanations as to how the data and information declared in the EPD arises from the Life Cycle Assessment. The verification of the EPD is aligned towards the structure of the rule document based on ISO 14025 and EN15804.

## Goal of the study

The reason for performing this LCA study is to publish an EPD based on EN 15804 and ISO 14025. This study contains the calculation and interpretation of the LCA results for Flotex tile complying with EN 1307.

Manufactured by  
Forbo Flooring UK Ltd  
High Holborn Road  
Ripley  
Derbyshire  
DE5 3NT  
United Kingdom

The following life cycle stages were considered:

- Product stage
- Transport stage
- Installation stage
- Use stage
- End-of-life stage
- Benefits and loads beyond the product system boundary

The main purpose of EPD is for use in business-to-business communication. As all EPD are publicly available on the website of UL Environment and therefore are accessible to the end consumer they can also be used in business-to-consumer communication.

The intended use of the EPD is to communicate environmentally related information and LCA results to support the assessment of the sustainable use of resources and of the impact of construction works on the environment

## Scope of the study

### Declared / functional unit

The declaration refers to the declared/functional unit of 1m<sup>2</sup> installed flooring product.

### Declaration of construction products classes

The LCA report refers to a manufacturer declaration of type 1a): Declaration of a specific product from a manufacturer's plant.

Flotex tile is produced at the following manufacturing site:

Forbo Flooring UK Ltd  
High Holborn Road  
Ripley  
Derbyshire  
DE5 3NT  
United Kingdom

## Product Definition


### Product Classification and description

This declaration covers a broad range of designs and colors. Flotex Tile is comprised of a polyamide 6.6 pile above a glass fiber reinforced recycled backing. Flotex Tile complies with all requirements of EN1307: Textile Floor Coverings - Classification of Pile Carpets.

Flotex Tile has been manufactured for over 25 years and is a well-known brand sold worldwide.

Flotex Tile is built up in 5 layers as illustrated in the following image:

Figure 1: Illustration of Flotex Tile

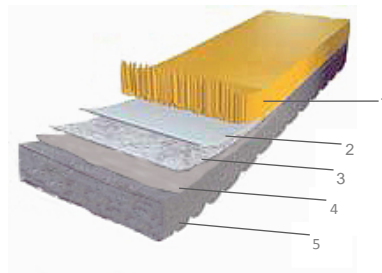

1. **Surface layer:** This layer gives Flotex Tile its design, color and wear properties
2. **Adhesive layer:** This layer bonds the surface layer to the backing
3. **Glass fiber layer:** This layer provides strength and dimensional stability to the product
4. **Lamination layer:** This layer bonds the recycled backing to the tile-top
5. **Recycled backing layer:** This layer is composed of recycled carpet/vinyl waste

# ENVIRONMENTAL PRODUCT DECLARATION





FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## Range of Applications

Flotex tile is classified in accordance with EN1307 to be installed in the following use areas defined in EN-ISO 10874:

Area of application	Flotex tile
Domestic	Class 23 
Commercial	Class 33 

## Product Standards

The product considered in this EPD has the following technical specifications:

- Meets or exceeds all requirements of EN1307: Textile Floor Coverings - Classification of Pile Carpets.



Flotex tile meets the requirements of EN 14041

EN 13501-1	Reaction to fire	B <sub>fl</sub> - s1
EN 13893	Slip resistance	DS: $\geq 0.30$
EN 1815	Body voltage	< 2 kV
ISO 8302	Thermal conductivity	0.0526 m <sup>2</sup> K/W

Fire Testing:

- Class 1 when tested in accordance with ASTM E 648/NFPA 253, Standard Test Method for Critical Radiant Flux.
- Meets 450 or less when tested in accordance with ASTM E 662/NFPA 258, Standard Test Method for Smoke Density.

## Accreditations

- ISO 9001 Quality Management System
- ISO 14001 Environmental Management System
- BREEAM
- Oeko-Tex
- British Allergy Foundation
- Ü Mark
- French act Grenelle: A+

Environment



# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## Delivery status

Characteristics	Nominal Value	Unit
Product thickness	5.3	mm
Product Weight	4540	g/m <sup>2</sup>
Tile dimension	0.5	m <sup>2</sup>

## Material Content

Component	Material	Mass %	Availability	Origin of raw material
Polymer	Emulsion PVC	13.13	Non-renewable	Europe
Plasticizer	DINP	9.53	Non-renewable	Europe
Filler	Calcium Carbonate	8.31	Abundant mineral	Europe
Substrate	Glass tissue	3.08	Non-renewable	Europe
Reinforcement	Glass net	0.42	Non-renewable	Europe
Carpet Pile	Polyamide 6.6	5.50	Non-renewable	Europe/USA
Fire Retardant	Aluminium trihydrate	0.46	Non-renewable	Europe/Asia
Heat stabilizer	Zinc stearate	0.11	Non-renewable	Europe
Recycled Backing	Carpet/vinyl waste	59.00	Post Industrial	Europe
Additives	Various chemicals	0.46	Non-renewable	Europe/Asia

## Production of Main Materials

**Emulsion PVC:** Polymer which is manufactured by the polymerisation of vinyl chloride monomer.

**DINP:** Plasticiser manufactured by the reaction of phthalic anhydride and alcohol. Plasticizer is added to increase the flexibility, durability and longevity of the floor covering.

**Calcium carbonate:** An abundant mineral found in all parts of the world as the chief substance in rocks (i.e., marble and limestone). It can be ground to varying particle sizes and is widely used as filler.

**Glass Tissue:** A non-woven sheet material comprising chopped glass fiber filaments bound together with a binder. Imparts dimensional stability and lay-flat properties.

**Glass net:** A non-woven grid structure comprising glass filament yarn bound together with a binder. Increases tear resistance of finished flooring.

**Nylon 6.6:** Synthetic yarn made from the condensation reaction of hexamethylene diamine and adipic acid. Forms the pile surface of Flotex and gives excellent abrasion resistance and durability.

**Alumina trihydrate:** Fire retardant filler obtained by extracting aluminium hydroxide from Bauxite which is naturally occurring in the Earth's surface. Imparts fire retardance of Flotex sheet.

**Heat stabilizer:** Heat Stabilizer based on Zinc stearate. It is used to avoid PVC degradation during processing at relative high temperature.

**Recycled backing:** Blend of waste carpet and vinyl floor coverings, which gives approximately 59% recycled content by weight in the finished tile product.

**Various chemicals:** Minor components including - antistatic agent, pigment, inhibitor.

## Production of the Floor Covering

### Flotex manufacturing process at Ripley

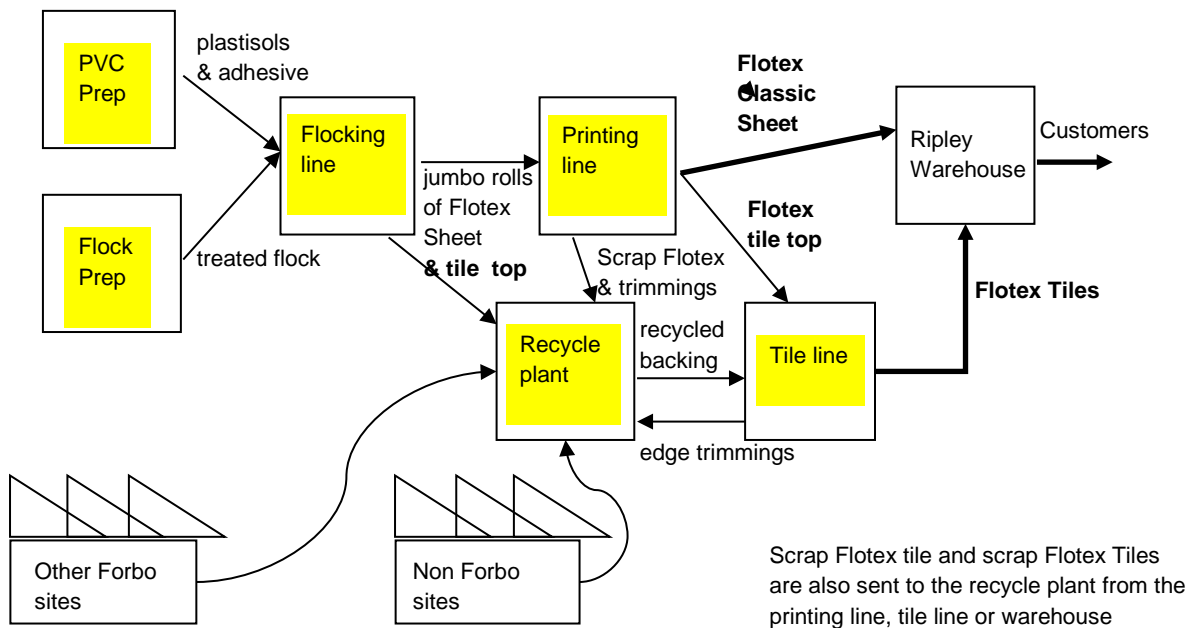


Figure 2 : Schematic manufacturing of Flotex tile

Flotex Tile is produced in several stages starting with *PVC Prep*, where the compounding of PVC emulsion polymers with plasticizer and other functional additives is carried out to produce various PVC plastisols. These plastisols are then spread-coated onto a glass substrate on the *Flocking Line*. The top surface of Flotex Tile is based on Nylon-6.6 tow, which is cut into 2mm fibers in the *Flock Prep* area. These fibers are scoured and dyed to give the desired color base shade before electrostatically flocking into the wet PVC plastisol on the *Flocking Line*. The flocked fibers form the surface pile of Flotex Tile. After flocking, the plastisols are fully cured at elevated temperature on the *Flocking Line*.

The finished tile-top is processed on the Ripley *Printing Line* where specific designs can be applied to the surface layer using a rotary screen technique. The printed carpet is steamed to fix dyestuffs then washed and dried.

In the *Recycle Plant* waste carpet and vinyl are processed to produce a recycled backing layer. The recycled backing is then laminated to the printed tile-top sheet on the *Tile Line*. After final curing, the tile material is cooled before cutting into 0.5m<sup>2</sup> tiles. The tiles are then automatically boxed and palletized. All product trimmings and any rejected finished product are recycled in-house.

### Health, Safety and Environmental Aspects during Production

- ISO 14001 Environmental Management System

### Production Waste

Rejected material and the cuttings of the trimming stage are reused in the manufacturing process. Packaging materials are collected separately and externally recycled.



## Delivery and Installation of the Floor Covering

### Delivery

A worldwide distribution by truck and container ship is considered. On average every square meter of Flotex tile is transported as follows:

- Transport distance 40 t truck 760 km
- Transport distance 7.5t truck (Fine distribution) 246 km
- Capacity utilization trucks (including empty runs) 85 %
- Transport distance Ocean ship 0 km
- Capacity utilization Ocean ship 48%

Since Flotex tile is mainly sold in Europe on average there is no significant transport distance for the distribution of Flotex tile by Ocean ship.

### Installation

Because of the specific techniques used during the installation of Flotex Tile approximately 2% of the material is cut off as installation waste. For installation of Flotex Tile on the floor a scenario has been modeled assuming an amount 0.05 kg/m<sup>2</sup> of flooring tackifier is applied to the sub-floor.

Waste during the installation process may be recycled as floor covering through the manufacturers' facilities or thermally recycled in a waste incineration plant. Since the major part of Flotex tile is sold in Europe the European electricity grid mix is used in the calculations for the energy recovery during incineration.

### Health, Safety and Environmental Aspects during Installation

Forbo flooring recommends using (low) zero emission adhesives for installing Flotex tile.

### Waste

Waste during the installation process may be recycled as floor covering through the manufacturers' facilities or thermally recycled in a waste incineration plant. Since the major part of Flotex tile is sold in Europe the European electricity grid mix is used in the calculations for the energy recovery during incineration.

### Packaging

Cardboard tubes and packaging paper can be collected separately and should be used in a local recycling process. In the calculation model, 100% incineration is taken into account for which there is a credit received.

### Use stage

The service lifetime of a floor covering for a certain application on a floor is too widespread to give one common number. For this EPD model the reference service lifetime (RSL) is set to one year. This means that all impacts for the use phase are based on the cleaning and maintenance model for one year. Depending on the area of use, the technical lifetime advised by the manufacturer and the estimated time on the floor by the customer, the service lifetime can be determined. The use phase impacts should be calculated with the foreseen service life to arrive at the total environmental impact.

# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## Cleaning and Maintenance

Level of use	Cleaning Process	Cleaning Frequency	Consumption of energy and resources
Commercial/Residential/Industrial	Vacuuming	Twice a week	Electricity
	Damp mopping	Once a week	Hot water Neutral detergent

For the calculations the following cleaning regime is considered:

- Dry cleaning with a 1.5 kW vacuum cleaner for 0.21 min/m<sup>2</sup>, twice a week. This equates to 0.55 kWh/m<sup>2</sup>\*year.
- Once a week wet cleaning with 0.062 l/m<sup>2</sup> water and 0.0008 kg/m<sup>2</sup> detergent. This result in the use of 3.224 l/m<sup>2</sup>\*year water and 0.04 kg/m<sup>2</sup>\*year detergent. The wet cleaning takes place without power machine usage. Waste water treatment of the arising waste water from cleaning is considered.

The cleaning regime that is recommended in practice will be highly dependent on the use of the premises where the floor covering is installed. In high traffic areas more frequent cleaning will be needed compared to areas where there is low traffic. The use of an entrance mat of at least four steps will reduce the cleaning frequency.

The cleaning regime used in the calculations is suitable for high traffic areas and is a worst case scenario.

## Prevention of Structural Damage

All newly laid floors should be covered and protected from with a suitable non-staining protective covering if other building activities are still in progress. Use protective feet on chairs and tables to reduce scratching. Castor wheels should be suitable for resilient floor coverings

## Health Aspects during Usage

Flotex tile is complying with:

- AgBB/DIBt requirements
- French act Grenelle: A+
- CHPS section 01350
- Oeko-tex
- British Allergy Foundation

## End of Life

The deconstruction of installed Flotex tile from the floor is done manually, since the tiles are installed using a tackifier. For the end of life stage a 100% landfill is taken into account with an average distance to the landfill facility by lorry of 200 km.

## Life Cycle Assessment

A full Life Cycle Assessment has been carried out according to ISO 14040 and ISO 14044.

The following Life Cycle Stages are assessed :

- Production Stage (Raw material acquisition, transportation to Manufacturing and Manufacturing)
- Transport Gate to User
- Installation Stage
- Use Stage
- End of Life Stage

Environment



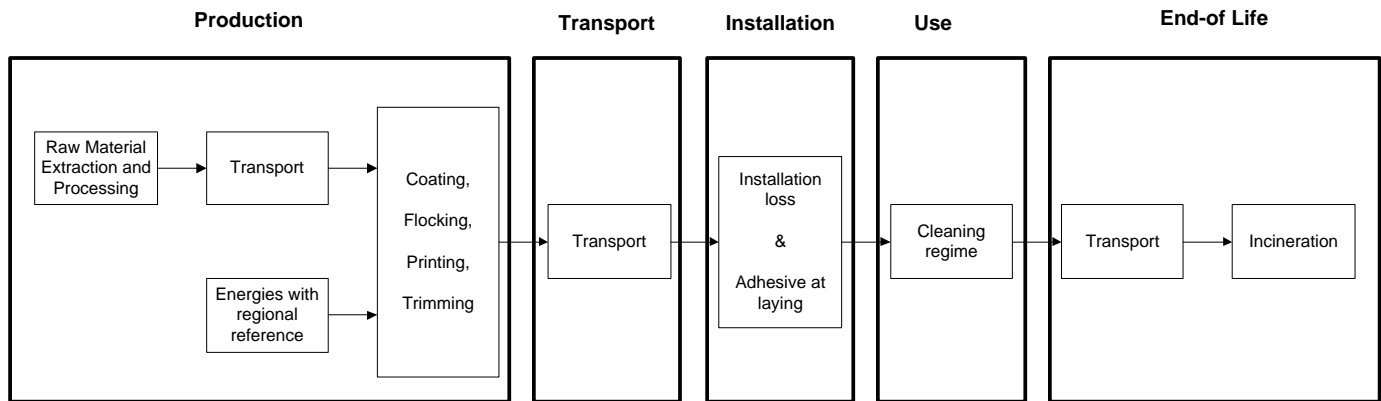


Figure 3 : Flow chart of the Life Cycle Assessment

## Description of the declared Functional Unit

The functional unit is one square meter of installed product and the use stage is considered for one year of service life.

## Cut off Criteria

The cut-off criteria shall be 1% of renewable and non-renewable primary energy usage and 1% of the total mass of the unit process. The total neglected input flows per module shall be a maximum of 5% of energy usage and mass.

In practice, in this assessment, all data from the production data acquisition are considered, i.e. all raw materials used as per formulation, use of water, electricity and other fuels, the required packaging materials, and all direct production waste. Transport data on all considered inputs and output material are also considered.

## LCA Data

As a general rule, specific data derived from specific production processes or average data derived from specific production processes have been used as the first choice as a basis for calculating an EPD.

For life cycle modeling of the considered products, the GaBi 6 Software System for Life Cycle Engineering, developed by PE INTERNATIONAL AG, has been used. All relevant LCA datasets are taken from the GaBi 6 software database. The datasets from the database GaBi are documented in the online documentation. To ensure comparability of results in the LCA, the basic data of GaBi database were used for energy, transportation and auxiliary materials.

## Data Quality

The requirements for data quality and LCA data correspond to the specifications of the PCR.

Foreground data are based on 1 year averaged data (year 2012). The reference ages of LCA datasets vary but are given in the table in the Appendix. The time period over which inputs to and outputs from the system is accounted for is 100 years from the year for which the data set is deemed representative. The technological LCA of the collected data reflects the physical reality of the declared product. The datasets are complete, conform to the system boundaries and the criteria for the exclusion of inputs and outputs and are geographical representative for the supply chain of Forbo flooring.

For life cycle modeling of the considered products the GaBi 6 Software System for Life Cycle Engineering, developed by PE INTERNATIONAL AG, is used. All relevant LCA datasets are taken from the GaBi 6 software database. The last revision of the used data sets took place within the last 10 years.

# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

Table 1: LCA datasets used in the LCA model

Data set	Region	Reference year
Polyamide 6.6 yarn	Germany	2005
Calcium carbonate	Germany	2011
Alumina trihydrate	Europe	2011
Polyvinyl chloride granulate (E-PVC)	Germany	2012
Di-isononyl phthalate (DINP)	Germany	2010
Various chemicals	Germany	2002
Various chemicals	South Africa	2005
Heat stabilizer	Europe	2010
Various chemicals	Europe	2007
Various chemicals)	Germany	2005
PVC (Waste for recovery)	Global	2006
Acrylic resin	Germany	2010
Glass net	Germany	2011
Glass tissue	Germany	2010
Water (desalinated; deionised)	Germany	2010
Detergent (ammonia based)	Germany	2006
Adhesive for resilient flooring	Germany	2010
Waste incineration of Flotex	Europe	2006
Electricity from Biomass	United Kingdom	2009
Electricity from Wind power	United Kingdom	2009
Electricity from Hydro power	United Kingdom	2009
Power grid mix	Europe	2009
Thermal energy from natural gas	United Kingdom	2009
Thermal energy from natural gas	Europe	2009
Trucks	Global	2010
Municipal waste water treatment (Sludge incineration).	Europe	2011
Container ship	Global	2010
Diesel mix at refinery	Europe	2009
Heavy fuel oil at refinery (1.0wt.% S)	Europe	2009
Polyethylene film	Europe	2005

The documentation of the LCA data sets can be taken from the GaBi documentation.

## System Boundaries

Production Stage includes provision of all materials, products and energy, packaging processing and its transport, as well as waste processing up to the end-of waste state or disposal of final residues during the product stage.

Transport and Installation Stage includes provision of all materials, products and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction stage. These information modules also include all impacts and aspects related to any losses during this construction stage (i.e. production, transport, and waste processing and disposal of the lost products and materials). For the transportation a worldwide distribution is considered.

Use Stage includes provision and transport of all materials, products and related energy and water use, as well as waste processing up to the end-of-waste state or disposal of final residues during this part of the use stage. These information modules also include all impacts and aspects related to the losses during this part of the use stage (i.e. production, transport, and waste processing and disposal of the lost products and materials).

End of Life Stage includes provision and all transports, provision of all materials, products and related energy and water use. It also includes any declared benefits and loads from net flows leaving the product system that have not been allocated as co-products and that have passed the end-of-waste state in the form of reuse, recovery and/or recycling potentials.

**Environment**



# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## Power mix

The selection of LCA data for the electricity generation is in line with the PCR.

The products are manufactured in Ripley, the United Kingdom. The GaBi 6 Hydro power (5%), Wind power (53%) and Biomass power (42%) datasets have therefore been used (reference year 2009). The energy supplier is providing Forbo with a certificate every year.

## CO<sub>2</sub>-Certificates

No CO<sub>2</sub>-certificates are considered in this study.

## Allocations

In the present study some allocations have been made. Detailed explanations can be found in the chapters below.

### Co-product allocation

No co-product allocation occurs in the product system.

### Allocation of multi-Input processes

The Production and End of Life stage include incineration plants. In these processes different products are treated together within a process. The allocation procedures followed in these cases are based on a physical classification of the mass flows or calorific values.

Credits from energy substitution are allocated to the production stage, because the gained energy from energy substitution is lower than the energy input in this stage. The same quality of energy is considered.

### Allocation procedure of reuse, recycling and recovery

The installation waste and end of life waste can be fed into incineration processes. Incineration processes include cogeneration processes which give thermal and power energy as outputs. It is assumed that this recovered energy offsets that produced by the European average grid mix and thermal energy generation from natural gas.

## Description of the allocation processes in the LCA report

The description of allocation rules in of this LCA report meets the requirements of the PCR.

## Description of the unit processes in the LCA report

The modeling of the unit processes reported for the LCA are documented in a transparent way, respecting the confidentiality of the data present in the LCA report.

In the following tables the type and amount of the different input and output flows are listed for 1m<sup>2</sup> produced flooring; installed flooring includes the material loss during installation (2%):

Table 2: Composition of Flotex tile upper top layer

Process data	Unit	Flotex tile
Polyamide 6.6 yarn	kg/m <sup>2</sup>	0.250

Table 3: Composition of Flotex tile under top layer

Process data	Unit	Flotex tile
Heat stabilizer	kg/m <sup>2</sup>	0.0012
Di-isononyl phthalate (DINP)	kg/m <sup>2</sup>	0.1186
Polyvinyl Chloride Granulate (E-PVC)	kg/m <sup>2</sup>	0.2130
Aluminium trihydrate	kg/m <sup>2</sup>	0.0210
Various chemicals	kg/m <sup>2</sup>	0.0162

# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

Table 4 Composition of Flotex tile intermediate layer

Process data	Unit	Flotex tile
Heat stabilizer	kg/m2	0.0038
Calcium carbonate	kg/m2	0.3781
Di-isononyl phthalate (DINP)	kg/m2	0.2851
Polyvinyl Chloride Granulate (E-PVC)	kg/m2	0.3775
Various Chemicals	kg/m2	0.0155

Table 5 Composition of Flotex tile bottom intermediate layer

Process data	Unit	Flotex tile
PVC (waste for recovery)	kg/m2	2.750

Table 6: Composition of Flotex substrate layer

Process data	Unit	Flotex tile
Acrylate resin	kg/m2	0.041
Glass tissue	kg/m2	0.067
Glass net	kg/m2	0.012

Table 7: Production related inputs/outputs

Process data	Unit	Flotex tile
<b>INPUTS</b>		
Flotex tile upper top layer	kg	0.250
Flotex tile under top layer	kg	0.370
Flotex tile intermediate layer	kg	1.060
Flotex tile bottom intermediate layer	Kg	2.750
Flotex tile substrate layer	kg	0.120
Electricity	MJ	9.867
Thermal energy from natural gas	MJ	41.505
Water	kg	10.277
<b>OUTPUTS</b>		
Flotex tile	kg	4.540
Waste	kg	0.033
Water	kg	8.238

# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

Table 8: Packaging requirements (per m<sup>2</sup> manufactured product)

Process data	Unit	Flotex tile
Cardboard	kg	0.083
Wooden pallets	kg	0.070
Polyethylene film	kg	0.0026

Table 9: Transport distances (same for both products)

Process data	Unit	Road	Truck size	Ship
Calcium carbonate	km	188	14 - 20t gross weight / 11,4t payload capacity	-
Polyamide 6.6 yarn	km	1230		35
Various chemicals	km	76		-
Aluminium trihydrate	km	600		-
Various chemicals	km	1228		35
Heat stabilizer	km	1406		35
Various chemicals	km	161		-
DINP	km	143		431
Various chemicals	km	1406		35
PVC granulate (E-PVC)	km	437		35
PVC (waste for recovery)	km	245		-
Glass net	km	129		-
Glass tissue	km	253		385
Acrylic resin	km	253		385
Polyethylene film	km	64		-
Transport to construction site : -Transport distance 40 t truck	km	1006 760	34 - 40 t gross weight / 27t payload capacity 7,5 t - 12t gross weight / 5t payload capacity	-
-Transport distance 7.5t truck (Fine distribution)		246		
Waste transport to landfill	km	200	7,5 t - 12t gross weight / 5t payload capacity	-

Table 10: Inputs/outputs from Installation

Process data	Unit	Flotex tile
<b>INPUTS</b>		
Flotex tile	kg	4.540
Adhesive (30% water content)	kg	0.050
o Water		
o Acrylate co-polymer		
o Styrene Butadiene co-polymer		
o Limestone flour		
o Sand		
<b>OUTPUTS</b>		
Installed Flotex tile	kg	4.449
Installation Waste	kg	0.091

Table 11: Inputs from use stage (per m<sup>2</sup>.year of installed product)

Process data	Unit	Flotex tile
Detergent	kg/year	0.04
Electricity	kWh/year	0.55
Water	kg/year	3.224

Environment



Table 12: Disposal

Process data	Unit	Flotex tile
Post-consumer Flotex tile to landfill	%	100

## Life Cycle Inventory Analysis

In table 14 the environmental impacts for one lifecycle are presented for Flotex tile. In the tables 15 and 16 the environmental impacts are presented for all the lifecycle stages.

Table 13: Results of the LCA – Environmental impacts one lifecycle (one year) – Flotex tile

Impact Category : CML 2001 – Nov. 2010	Flotex tile	Unit
Global Warming Potential (GWP 100 years)	13.60	kg CO <sub>2</sub> -Equiv.
Ozone Layer Depletion Potential (ODP, steady state)	1.49E-07	kg R11-Equiv.
Acidification Potential (AP)	1.93E-02	kg SO <sub>2</sub> -Equiv.
Eutrophication Potential (EP)	3.11E-03	kg Phosphate-Equiv.
Photochem. Ozone Creation Potential (POCP)	9.76E-03	kg Ethene-Equiv.
Abiotic Depletion Potential Elements (ADPE)	4.63E-03	kg Sb-Equiv.
Abiotic Depletion Potential Fossil (ADPF)	231.52	[MJ]

Table 14: Results of the LCA – Environmental impact for Flotex tile (one year)

Impact Category : CML 2001 – Nov. 2010	Unit	Production	Transport	Installation	Use (1yr)	End of Life
Global Warming Potential	kg CO <sub>2</sub> -Equiv.	11.52	0.43	0.48	0.32	0.85
Ozone Layer Depletion Potential	kg R11-Equiv.	1.36E-07	3.91E-12	5.04E-10	2.30E-09	1.06E-08
Acidification Potential	kg SO <sub>2</sub> -Equiv.	1.50E-02	9.33E-04	7.23E-04	1.35E-03	1.26E-03
Eutrophication Potential	kg PSO <sub>4</sub> -Equiv.	2.48E-03	2.13E-04	9.33E-05	8.29E-05	2.34E-04
Photochem. Ozone Creation Potential	kg Ethene-Equiv.	9.57E-03	-3.22E-04	1.64E-04	9.17E-05	2.58E-04
Abiotic Depletion Elements	kg Sb-Equiv.	4.63E-03	8.33E-09	1.05E-07	6.36E-08	3.09E-08
Abiotic Depletion Fossil	MJ	211.48	3.10	6.60	5.78	4.56

The relative contribution of each process stage to each impact category for Flotex tile is shown in figures 4.

# ENVIRONMENTAL PRODUCT DECLARATION




FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

Figure 4: relative contribution of each process stage to each impact category for Flotex tile for a one year usage.

Flotex tile LCA and LCI - 1 year usage

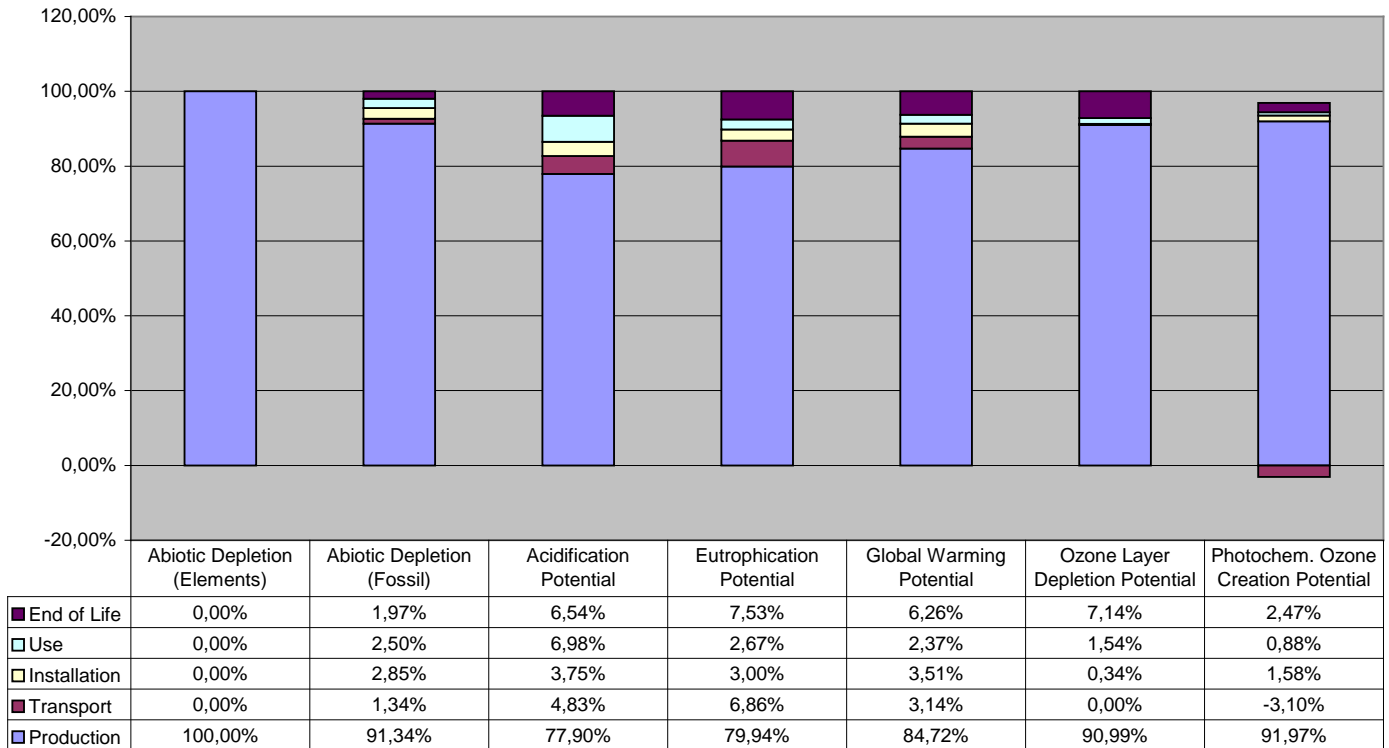

## Interpretation

The interpretation of the results has been carried out considering the assumptions and limitations declared in the EPD, both methodology- and data-related for a one year usage.

In all impact categories the production stage has the main contribution, between 77 and 100% of the total overall impact. For most of the categories the main contributor in the production stage is the Raw material supply with a share of more than 78% of total impacts from the production stage. Only for the POCP the share of the Forbo manufacturing is significant with a share of 81%.

In the transport stage AP, EP and GWP are having a considerable bigger impact than the other categories, for the POCP there is a credit in this life cycle stage. The main contributors to the impacts of these 4 categories are the trucks used for the trucking and fine distribution of Flotex tile to the user.

For GWP, AP, EP and ADPF the adhesive for the flooring installation has a minor impact of approximately 3% of the total. Also for the use stage these are the main impact categories, mainly caused by the use of electricity for cleaning.

At the End of Life stage the main impacts are AP, EP, GWP and ODP, this is due to the fact that a 100% landfill is considered in the calculation.

## Additional Environmental Information

To be fully transparant Forbo Flooring does not only want to declare the environmental impacts required in the PCR, but also the impacts on human health and eco-toxicity. Furthermore the outcome of the calculations according to the european Standard EN15804 are published in this section.

Environment



# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## Toxicity

For this calculations the USEtox<sup>TM</sup> model is used as being the globally recommended preferred model for characterization modeling of human and eco-toxic impacts in LCIA by the United Nations Environment Programme SETAC Life Cycle Initiative.

According to the "ILCD Handbook: Recommendations for Life Cycle Impact Assessment in the European context" the recommended characterization models and associated characterization factors are classified according to their quality into three levels:

- Level I (recommended and satisfactory),
- level II (recommended but in need of some improvements)
- level III (recommended, but to be applied with caution).

A mixed classification sometimes is related to the application of the classified method to different types of substances. USEtox<sup>TM</sup> is classified as Level II / III, unlike for example the CML impact categories which are classified as Level I.

Table 15: Results of the LCA – Environmental impacts one lifecycle (one year) – Flotex tile

Impact Category : USEtox	Flotex tile	Unit
Eco toxicity	5.89E-01	PAF m3.day
Human toxicity, cancer	7.18E-09	Cases
Human toxicity, non-canc.	7.97E-07	Cases

In the following two tables the impacts are subdivided into the lifecycle stages.

Table 16: Results of the LCA – Environmental impact for Flotex tile (one year)

Impact Category : USEtox	Unit	Production	Transport	Installation	Use (1yr)	End of Life
Eco toxicity	PAF m3.day	4.98E-01	2.79E-02	6.49E-03	2.78E-02	2.90E-02
Human toxicity, cancer	cases	6.62E-09	1.16E-10	1.24E-10	2.66E-10	5.43E-11
Human toxicity, non-canc.	cases	6.35E-07	5.47E-08	8.13E-09	5.50E-08	4.42E-08

## Interpretation

The interpretation of the results has been carried out considering the assumptions and limitations declared in the EPD, both methodology- and data-related for a one year usage.

In all the Toxicity categories the production stage has the main contribution of the total overall impact, this is mainly caused by the Raw material supply which is responsible for 81 – 93% of the toxicity impacts in this life cycle stage.

In the transport stage almost 100% of the impacts are caused by the diesel used for the trucks.

Another stage with a significant impact is the Use stage for all three impact categories. This is mainly due to the use of electricity for the cleaning of the floor. The used cleaning regime of vacuuming twice a week is very conservative and will in practice most of the times be lower.

At the End of Life stage the main impacts are Eco toxicity and Human toxicity (non-canc.), this is due to the fact that a 100% landfill is considered in the calculation.

# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## EN15804 results

In this section the calculations have been conducted according to the requirements of the European Standard EN 158024 following the document "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report".

Table 17: Results of the LCA – Environmental impact for Flotex tile (one year)

Parameter	Unit	Manufacturing	Installation		Use (1yr)	End of Life			Credits
		A1-3	A4	A5	B2	C1	C2	C4	D
GWP	[kg CO <sub>2</sub> -Equiv.]	11.5	0.43	0.58	0.32	0.01	0.12	0.78	-0.17
ODP	[kg CFC11-Equiv.]	1.36E-07	3.91E-12	5.46E-10	2.30E-09	1.30E-11	2.16E-12	1.07E-08	-9.79E-11
AP	[kg SO <sub>2</sub> -Equiv.]	1.50E-02	9.33E-04	9.89E-04	1.35E-03	6.84E-05	6.20E-04	8.68E-04	-5.59E-04
EP	[kg PO <sub>4</sub> <sup>3-</sup> - Equiv.]	2.48E-03	2.13E-04	1.11E-04	8.29E-05	3.60E-06	1.43E-04	1.03E-04	-3.33E-05
POCP	[kg Ethen Equiv.]	9.57E-03	-3.22E-04	1.86E-04	9.17E-05	4.03E-06	6.90E-05	2.02E-04	-3.89E-05
ADPE	[kg Sb Equiv.]	4.63E-03	8.33E-09	1.14E-07	6.36E-08	1.99E-09	4.60E-09	3.29E-08	-1.72E-08
ADPF	[MJ]	211	3.1	8.42	5.78	0.25	1.71	3.69	-2.91

GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non fossil resources; ADPF = Abiotic depletion potential for fossil resources

Table 18: Results of the LCA – Resource use for Flotex tile (one year)

Parameter	Unit	Manufacturing	Installation		Use (1yr)	End of Life			Credits
		A1-3	A4	A5	B2	C1	C2	C4	D
PERE	[MJ]	-	-	-	-	-	-	-	-
PERM	[MJ]	-	-	-	-	-	-	-	-
PERT	[MJ]	5.94	0.12	0.17	0.79	0.04	0.07	0.10	-0.32
PENRE	[MJ]	-	-	-	-	-	-	-	-
PENRM	[MJ]	-	-	-	-	-	-	-	-
PENRT	[MJ]	215	3.1	8.43	5.84	0.26	1.71	3.87	-2.92
SM	[kg]	0	-	-	-	-	-	-	-
RSF	[MJ]	1.85E-03	1.95E-05	2.53E-04	9.54E-05	5.20E-06	1.08E-05	2.19E-03	-4.82E-05
NRSF	[MJ]	1.93E-02	2.05E-04	2.24E-03	9.99E-04	5.45E-05	1.13E-04	3.17E-03	-5.05E-04
FW	[kg]	2.66E+01	1.34E-01	2.06E+00	5.28E+00	1.14E-01	7.43E-02	-4.51E+00	-8.76E-01

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Use of net fresh water

Table 19: Results of the LCA – Output flows and Waste categories for Flotex tile (one year)

Parameter	Unit	Manufacturing	Transport	Installation	Use (1yr)	End of Life/credits			
		A1-3	A4	A5	B2	C1	C2	C4	D
HWD	[kg]	5.26E-03	0	2.93E-03	0	0	0	0	0
NHWD	[kg]	1.06E+01	1.10E-02	4.40E-01	1.12E+00	5.76E-02	6.08E-03	4.95E+00	-4.35E-01
RWD	[kg]	3.29E-03	4.30E-06	1.06E-04	7.12E-04	3.75E-05	2.38E-06	1.33E-04	-2.82E-04
CRU	[kg]	-	-	-	-	-	-	-	0
MFR	[kg]	-	-	-	-	-	-	-	0
MER	[kg]	-	-	-	-	-	-	-	0
EE Power	[MJ]	-	-	9.45E-03	-	-	-	-	-
EE Thermal energy	[MJ]	-	-	0	-	-	-	-	-

HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy per energy carrier

## Interpretation

The interpretation of the environmental impacts calculated according to EN 15804 are similar to the interpretation according to ISO 14025. A more detailed interpretation for a one year usage is presented in following figures and tables.

Environment



# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

Figure 5: relative contribution of each process stage to each impact category for Flotex tile for a one year usage.

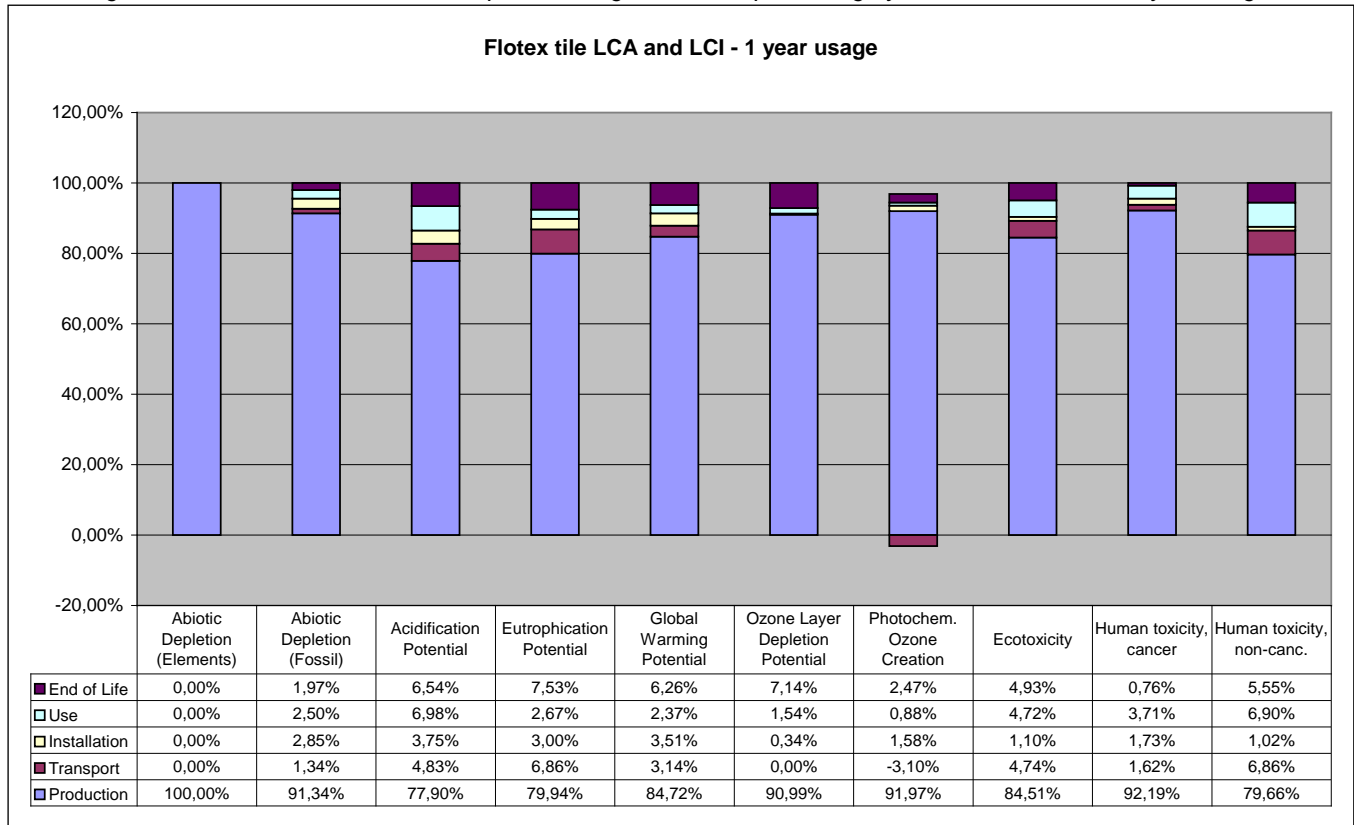


Table 20: Main modules and flows contributing to the total impact in each impact category for Flotex tile for a one year usage

Impact Category	Stage	Module		Main contributor	Main contributing flows
GWP	Production	Raw Material Extraction	8.83 kg CO <sub>2</sub> -equiv.	Polyamide 6.6 fibers (4.84 kg CO <sub>2</sub> -eq.) Emulsion-PVC (1.63 kg CO <sub>2</sub> -eq.)	Production : Inorganic emissions to air, Carbon dioxide
		Transport of Raw materials	0.03 kg CO <sub>2</sub> -equiv.	Means of transport (truck, container ship) and their fuels	
		Manufacturing	2.74 kg CO <sub>2</sub> -equiv.	96% Thermal energy	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Inorganic emissions to air, Carbon dioxide
	Installation	Installation		55% Adhesive	
	Use	Use		82% Electricity 18% Detergent	Use : Inorganic emissions to air, Carbon dioxide
	EOL	EOL		Land filling of post-consumer Flotex tile	EOL : Inorganic emissions to air, Carbon dioxide EOL : Organic emissions to air (Group VOC), Methane
ODP	Production	Raw Material Extraction	94%	92% Polyamide 6.6	Production : Halogenated organic emissions to air, R11 (trichlorofluoromethane), R114 (Dichlorotetrafluorethane), Halon (1301)
		Transport of Raw materials	< 0.05%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	6%	99% Packaging end product	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Halogenated organic emissions to air, R11 (trichlorofluoromethane), R114 (Dichlorotetrafluorethane)
	Installation	Installation		59% Adhesive 41% Landfill of installation waste	
	Use	Use		10% Electricity 90% Detergent	Use : Halogenated organic emissions to air, R11 (trichlorofluoromethane), R114

Environment



# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

Impact Category	Stage	Module		Main contributor	Main contributing flows
					(Dichlorotetrafluorethane)
	EOL	EOL		Land filling of post-consumer Flotex tile	EOL: Halogenated organic emissions to air, R11 (trichlorofluoromethane), R114 (Dichlorotetrafluorethane)
AP	Production	Raw Material Extraction	90%	40% Polyamide 6.6 18% Emulsion PVC 14% DINP	Production : Inorganic emissions to air, NO <sub>x</sub> and Sulphur dioxide
		Transport of Raw materials	1%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	9%	76% Thermal energy 19% Packaging end product	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Inorganic emissions to air, NO <sub>x</sub> and Sulphur dioxide
	Installation	Installation		92% Adhesive	
	Use	Use		93% Electricity 7% Detergent	Use : Inorganic emissions to air, NO <sub>x</sub> and Sulphur dioxide
	EOL	EOL		Land filling of post-consumer Flotex tile	EOL : Inorganic emissions to air, NO <sub>x</sub> and Sulphur dioxide
EP	Production	Raw Material Extraction	86%	47% Polyamide 6.6 14% emulsion PVC 13% Various chemicals	Production : Inorganic emissions to air, Ammonia, NO <sub>x</sub> Production : Inorganic emissions to fresh water, Nitrate , Phosphorus
		Transport of Raw materials	1%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	13%	18% Waste water treatment 63% Thermal energy	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Inorganic emissions to air, NO <sub>x</sub>
	Installation	Installation		88% Adhesive	Transport & Installation : Inorganic emissions to fresh water, Ammonium / ammonia
	Use	Use		80% Electricity 20% Detergent	Use : Inorganic emissions to air, NO <sub>x</sub> Use : Inorganic emissions to fresh water, Ammonium / ammonia, Nitrate
	EOL	EOL		Land filling of post-consumer Flotex tile	EOL : Inorganic emissions to air, NO <sub>x</sub>
POCP	Production	Raw Material Extraction	19%	57% polyamide 6.6 14% Emulsion PVC 15% DINP	Production : Inorganic emissions to air, Carbon monoxide, NO <sub>x</sub> , Sulphur dioxide Production : Organic emissions to air (Group VOC), Methane, VOC (unspecified)
		Transport of Raw materials	< 0.3%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	81%	80% Thermal energy	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Inorganic emissions to air, Carbon monoxide, NO <sub>x</sub> , Sulphur dioxide Transport & Installation : Organic emissions to air (Group VOC), Methane
	Installation	Installation		94% Adhesive	
	Use	Use		92% electricity 8% Detergent	Use : Inorganic emissions to air, Sulphur dioxide, Nitrogen dioxide
	EOL	EOL		Land filling of post-consumer Flotex tile	EOL : Inorganic emissions to air, Carbon monoxide , NO <sub>x</sub> , Sulphur dioxide EOL : Organic emissions to air (Group VOC), Methane
ADPe	Production	Raw Material Extraction	100%	99.4% Various chemicals	Production : Nonrenewable resources, Antimony – Gold – Ore (0.09%)
		Transport of Raw materials	<0,1%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	<0.1%	35% Thermal energy	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Nonrenewable resources, Sodium chloride (rock salt)
	Installation	Installation		95% Adhesive	
	Use	Use		57% Electricity 43% Detergent	Use : Nonrenewable resources, Sodium chloride (Rock salt) Use : Nonrenewable elements, Chromium, Copper, Gold, Lead, Molybdenum
	EOL	EOL		Land filling of post-consumer Flotex tile	EOL : Nonrenewable resources, Lead-Zinc ore, Sodium chloride (rock salt)
ADPf	Production	Raw Material Extraction	78%	45% Polyamide 6.6 22% DINP	Production : Crude oil resource, Crude oil (in MJ)

Environment



# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

Impact Category	Stage	Module		Main contributor	Main contributing flows
		Transport of Raw materials	<0.2%	22% Emulsion PVC Means of transport (truck, container ship) and their fuels	Production : Natural gas (resource), Natural gas (in MJ)
		Manufacturing	22%	96% Thermal energy	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	
	Installation	Installation		97% Adhesive	Transport & Installation : Crude oil (resource) Transport & Installation : Natural gas (resource),
	Use	Use		81% electricity 19% Detergent	Use : Hard coal (resource), Natural gas (resource), Uranium (resource)
	EOL	EOL		Land filling of post-consumer Flotex tile	EOL : Natural gas (resource), Uranium (resource), Crude oil (resource)
Ecotoxicity	Production	Raw Material Extraction	89%	21% Polyamide 6.6 16% Emulsion PVC 9% Heat stabilizer 36% Various chemicals	Production : Heavy metals to fresh water, Arsenic (+V), Copper (+II), Zinc (+II), Nickel (+II)
		Transport of Raw materials	1%	Means of transport (truck, container ship) and their fuels	Production : Heavy metals to agricultural soil, Copper (+II), Zinc (+II)
		Manufacturing	10%	52% Waste water treatment	Production : Heavy metals to industrial soil, Copper (+II), Zinc (+II)
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & installation : Heavy metals to fresh water, Copper (+II), Nickel (+II), Zinc (+II)
	Installation	Installation		91% Adhesive	
	Use	Use		7% Detergent 93% Electricity	Use : Heavy metals to fresh water, Copper (+II), Zinc (+II) Use : Heavy metals to agricultural soil, Copper (+II), Zinc (+II)
	EOL	EOL		Land filling of post-consumer Flotex tile	EOL : Heavy metals to fresh water, Copper (+II), Zinc (+II), Antimony EOL : Heavy metals to industrial soil, Zinc (+II)
Human toxicity, cancer	Production	Raw Material Extraction	81%	32% Polyamide 6.6 18% Emulsion PVC 16% Various chemicals 10% Glass net	Production : Heavy metals to fresh water, Chromium (+VI), Arsenic (+V)
		Transport of Raw materials	1%	Means of transport (truck, container ship) and their fuels	Production : Heavy metals to agricultural soil, Lead (+II), Mercury (+II)
		Manufacturing	18%	85% Waste water treatment	Production : Heavy metals to industrial soil, Lead (+II), Mercury (+II), Nickel (+II)
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Heavy metals to air, Mercury (+II)
	Installation	Installation		97% adhesive	Transport & Installation : Heavy metals to fresh water, Chromium (+VI), Nickel (+II)
	Use	Use		85% Electricity	Use : Heavy metals to air, Mercury (+II) Use : Heavy metals to fresh water, Chromium (+VI) Use : Heavy metals to agricultural soil, Mercury (+II)
	EOL	EOL		Land filling of post-consumer Flotex tile	EOL : Heavy metals to air, Mercury (+II) EOL : Heavy metals to agricultural soil, Mercury (+II)
Human toxicity, non canc.	Production	Raw Material Extraction	93%	14% Heat stabilizer 15% Emulsion PVC 53% Various chemicals	Production : Heavy metals to air, Mercury (+II)
		Transport of Raw materials	1%	Means of transport (truck, container ship) and their fuels	Production : Heavy metals to fresh water, Arsenic (+V), Zinc (+II)
		Manufacturing	6%	56% Thermal energy 29% Packaging end product	Production : Heavy metals to agricultural soil, Lead (+II), Mercury (+II), Zinc (+II) Production : Heavy metals to industrial soil, Zinc (+II), Lead (+II)
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Heavy metals to air, Mercury (+II)
	Installation	Installation		91% adhesive	Transport & Installation : Heavy metals to agricultural soil, Lead (+II), Mercury (+II), Zinc (+II)
	Use	Use		99% electricity	Use : Heavy metals to air, Mercury (+II), Zinc (+II) Use : Heavy metals to agricultural soil, Mercury (+II), Zinc (+II)
	EOL	EOL		Land filling of post-consumer	EOL : Heavy metals to agricultural soil, Lead

Environment



# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

Impact Category	Stage	Module	Main contributor	Main contributing flows
			Flotex tile	(+II), Mercury (+II), Zinc (+II) EOL : Heavy metals to industrial soil, Zinc (+II)

## Description of Selected Impact Categories

### Abiotic Depletion Potential

The abiotic depletion potential covers all natural resources such as metal containing ores, crude oil and mineral raw materials. Abiotic resources include all raw materials from non-living resources that are non-renewable. This impact category describes the reduction of the global amount of non-renewable raw materials. Non-renewable means a time frame of at least 500 years. This impact category covers an evaluation of the availability of natural elements in general, as well as the availability of fossil energy carriers.

ADP (elements) describes the quantity of non-energetic resources directly withdrawn from the geosphere. It reflects the scarcity of the materials in the geosphere and is expressed in Antimony equivalents. The characterization factors are published by the CML, Oers 2010.

Are fossil energy carriers included in the impact category, it is ADP (fossil). Fossil fuels are used similarly to the primary energy consumption; the unit is therefore also MJ. In contrast to the primary fossil energy ADP fossil does not contain uranium, because this does not count as a fossil fuel.

### Primary energy consumption

Primary energy demand is often difficult to determine due to the various types of energy source. Primary energy demand is the quantity of energy directly withdrawn from the hydrosphere, atmosphere or geosphere or energy source without any anthropogenic change. For fossil fuels and uranium, this would be the amount of resource withdrawn expressed in its energy equivalent (i.e. the energy content of the raw material). For renewable resources, the energy-characterized amount of biomass consumed would be described. For hydropower, it would be based on the amount of energy that is gained from the change in the potential energy of water (i.e. from the height difference). As aggregated values, the following primary energies are designated:

The total "**Primary energy consumption non-renewable**", given in MJ, essentially characterizes the gain from the energy sources natural gas, crude oil, lignite, coal and uranium. Natural gas and crude oil will both be used for energy production and as material constituents e.g. in plastics. Coal will primarily be used for energy production. Uranium will only be used for electricity production in nuclear power stations.

The total "**Primary energy consumption renewable**", given in MJ, is generally accounted separately and comprises hydropower, wind power, solar energy and biomass. It is important that the end energy (e.g. 1 kWh of electricity) and the primary energy used are not miscalculated with each other; otherwise the efficiency for production or supply of the end energy will not be accounted for. The energy content of the manufactured products will be considered as feedstock energy content. It will be characterized by the net calorific value of the product. It represents the still usable energy content.

### Waste categories

There are various different qualities of waste. For example, waste can be classed according to German and European waste directives. The modeling principles have changed with the last GaBi4 database update in October 2006. Now all LCA data sets (electricity generation, raw material etc.) already contain the treatment of the waste with very low waste output at the end of the stage. So the amount of waste is predominantly caused by foreground processes during the production phase. This is important for the interpretation of waste amounts.

From a balancing point of view, it makes sense to divide waste into three categories. The categories overburden/tailings, industrial waste for municipal disposal and hazardous waste will be used.

**Overburden / tailings** in kg: This category consists of the layer which must be removed in order to access raw material extraction, ash and other raw material extraction conditional materials for disposal. Also included in this

category are tailings such as inert rock, slag, red mud etc.

**Industrial waste for municipal disposal** in kg: This term contains the aggregated values of industrial waste for municipal waste according to 3. AbfVwV TA SiedlABf.

**Hazardous waste** in kg: This category includes materials that will be treated in a hazardous waste incinerator or hazardous waste landfill, such as painting sludges, galvanic sludges, filter dusts or other solid or liquid hazardous waste and radioactive waste from the operation of nuclear power plants and fuel rod production.

## Global Warming Potential (GWP)

The mechanism of the greenhouse effect can be observed on a small scale, as the name suggests, in a greenhouse. These effects are also occurring on a global scale. The occurring short-wave radiation from the sun comes into contact with the earth's surface and is partly absorbed (leading to direct warming) and partly reflected as infrared radiation. The reflected part is absorbed by so-called greenhouse gases in the troposphere and is re-radiated in all directions, including back to earth. This results in a warming effect on the earth's surface.

In addition to the natural mechanism, the greenhouse effect is enhanced by human activities. Greenhouse gases that are considered to be caused, or increased, anthropogenically are, for example, carbon dioxide, methane and CFCs. *Figure A1* shows the main processes of the anthropogenic greenhouse effect. An analysis of the greenhouse effect should consider the possible long term global effects.

The global warming potential is calculated in carbon dioxide equivalents (CO<sub>2</sub>-Eq.). This means that the greenhouse potential of an emission is given in relation to CO<sub>2</sub>. Since the residence time of the gases in the atmosphere is incorporated into the calculation, a time range for the assessment must also be specified. A period of 100 years is customary.

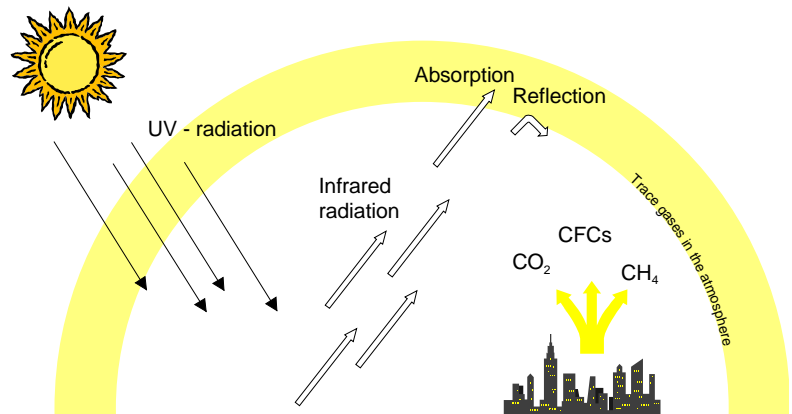


Figure A1: Greenhouse effect (KREISSIG 1999)

## Acidification Potential (AP)

The acidification of soils and waters predominantly occurs through the transformation of air pollutants into acids. This leads to a decrease in the pH-value of rainwater and fog from 5.6 to 4 and below. Sulphur dioxide and nitrogen oxide and their respective acids (H<sub>2</sub>SO<sub>4</sub> and HNO<sub>3</sub>) produce relevant contributions. This damages ecosystems, whereby forest dieback is the most well-known impact.

Acidification has direct and indirect damaging effects (such as nutrients being elutriated from soils or an increased solubility of metals into soils). But even buildings and building materials can be damaged. Examples include metals and natural stones which are corroded or disintegrated at an increased rate.

When analyzing acidification, it should be considered that although it is a global problem, the regional effects of acidification can vary. *Figure A2* displays the primary impact pathways of acidification.

The acidification potential is given in sulphur dioxide equivalents (SO<sub>2</sub>-Eq.). The acidification potential is described as the ability of certain substances to build and release H<sup>+</sup> - ions. Certain emissions can also be considered to have an acidification potential, if the given S-, N- and halogen atoms are set in proportion to the molecular mass of the emission. The reference substance is sulphur dioxide.

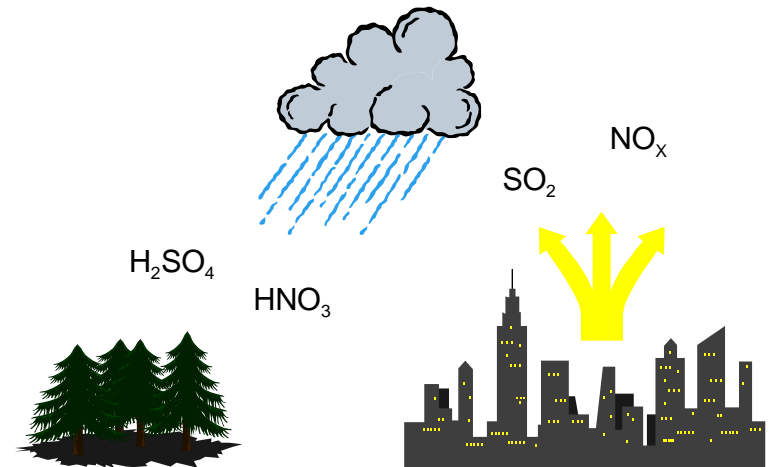


Figure A2: Acidification Potential (KREISSIG 1999)

## Eutrophication Potential (EP)

Eutrophication is the enrichment of nutrients in a certain place. Eutrophication can be aquatic or terrestrial. Air pollutants, waste water and fertilization in agriculture all contribute to eutrophication.

The result in water is an accelerated algae growth, which in turn, prevents sunlight from reaching the lower depths. This leads to a decrease in photosynthesis and less oxygen production. In addition, oxygen is needed for the decomposition of dead algae. Both effects cause a decreased oxygen concentration in the water, which can eventually lead to fish dying and to anaerobic decomposition (decomposition without the presence of oxygen). Hydrogen sulphide and methane are thereby produced. This can lead, among others, to the destruction of the ecosystem.

On eutrophicated soils, an increased susceptibility of plants to diseases and pests is often observed, as is a degradation of plant stability. If the nitrification level exceeds the amounts of nitrogen necessary for a maximum harvest, it can lead to an enrichment of nitrate. This can cause, by means of leaching, increased nitrate content in groundwater. Nitrate also ends up in drinking water.

Nitrate at low levels is harmless from a toxicological point of view. However, nitrite, a reaction product of nitrate, is toxic to humans. The causes of eutrophication are displayed in Figure A3. The eutrophication potential is calculated in phosphate equivalents (PO<sub>4</sub>-Eq.). As with acidification potential, it's important to remember that the effects of eutrophication potential differ regionally.

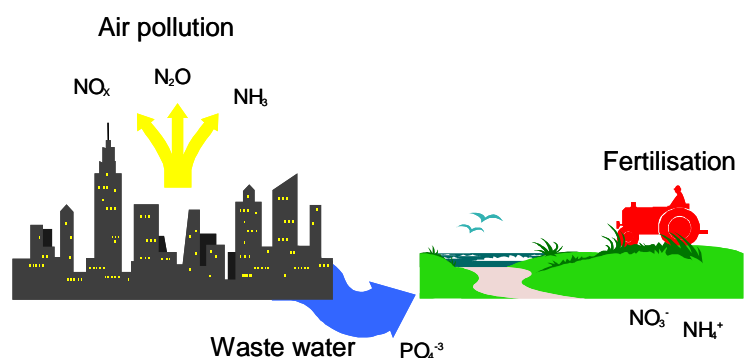


Figure A3: Eutrophication Potential (KREISSIG 1999)

## Photochemical Ozone Creation Potential (POCP)

Despite playing a protective role in the stratosphere, at ground-level ozone is classified as a damaging trace gas. Photochemical ozone production in the troposphere, also known as summer smog, is suspected to damage vegetation and material. High concentrations of ozone are toxic to humans.

Radiation from the sun and the presence of nitrogen oxides and hydrocarbons incur complex chemical reactions, producing aggressive reaction products, one of which is ozone. Nitrogen oxides alone do not cause high ozone concentration levels. Hydrocarbon emissions occur from incomplete combustion, in conjunction with petrol (storage, turnover, refueling etc.) or from solvents. High concentrations of ozone arise when the temperature is high, humidity is

low, when air is relatively static and when there are high concentrations of hydrocarbons. Today it is assumed that the existence of NO and CO reduces the accumulated ozone to NO<sub>2</sub>, CO<sub>2</sub> and O<sub>2</sub>. This means, that high concentrations of ozone do not often occur near hydrocarbon emission sources. Higher ozone concentrations more commonly arise in areas of clean air, such as forests, where there is less NO and CO (Figure A4).

In Life Cycle Assessments, photochemical ozone creation potential (POCP) is referred to in ethylene-equivalents (C<sub>2</sub>H<sub>4</sub>-Äq.). When analyzing, it's important to remember that the actual ozone concentration is strongly influenced by the weather and by the characteristics of the local conditions.

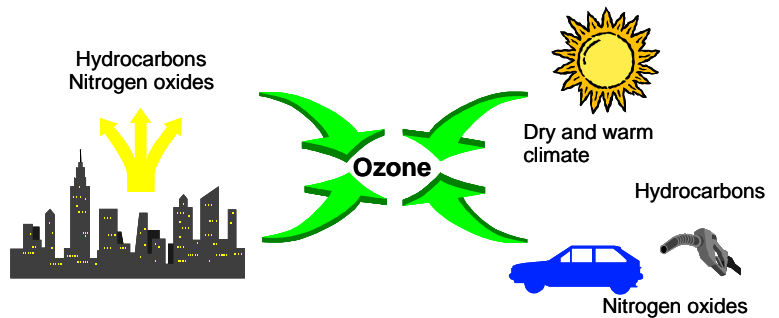


Figure A4: Photochemical Ozone Creation Potential

## Ozone Depletion Potential (ODP)

Ozone is created in the stratosphere by the disassociation of oxygen atoms that are exposed to short-wave UV-light. This leads to the formation of the so-called ozone layer in the stratosphere (15 - 50 km high). About 10 % of this ozone reaches the troposphere through mixing processes. In spite of its minimal concentration, the ozone layer is essential for life on earth. Ozone absorbs the short-wave UV-radiation and releases it in longer wavelengths. As a result, only a small part of the UV-radiation reaches the earth.

Anthropogenic emissions deplete ozone. This is well-known from reports on the hole in the ozone layer. The hole is currently confined to the region above Antarctica, however another ozone depletion can be identified, albeit not to the same extent, over the mid-latitudes (e.g. Europe). The substances which have a depleting effect on the ozone can essentially be divided into two groups; the fluorine-chlorine-hydrocarbons (CFCs) and the nitrogen oxides (NOX). Figure A5 depicts the procedure of ozone depletion.

One effect of ozone depletion is the warming of the earth's surface. The sensitivity of humans, animals and plants to UV-B and UV-A radiation is of particular importance. Possible effects are changes in growth or a decrease in harvest crops (disruption of photosynthesis), indications of tumors (skin cancer and eye diseases) and decrease of sea plankton, which would strongly affect the food chain. In calculating the ozone depletion potential, the anthropogenically released halogenated hydrocarbons, which can destroy many ozone molecules, are recorded first. The so-called Ozone Depletion Potential (ODP) results from the calculation of the potential of different ozone relevant substances.

This is done by calculating, first of all, a scenario for a fixed quantity of emissions of a CFC reference (CFC 11). This results in an equilibrium state of total ozone reduction. The same scenario is considered for each substance under study whereby CFC 11 is replaced by the quantity of the substance. This leads to the ozone depletion potential for each respective substance, which is given in CFC 11 equivalents. An evaluation of the ozone depletion potential should take the long term, global and partly irreversible effects into consideration.

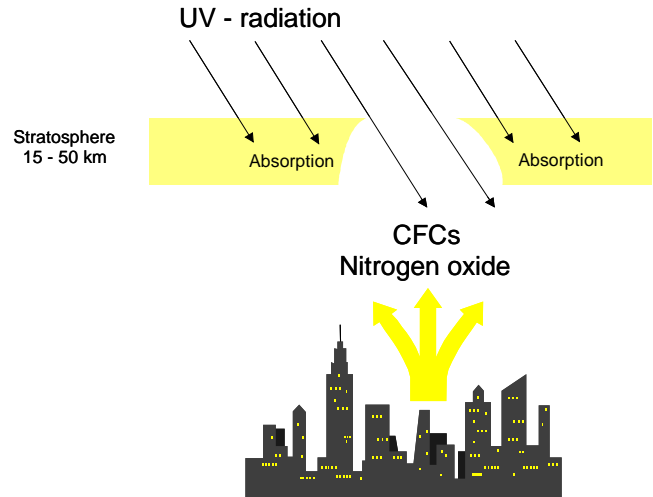


Figure A5:

Ozone Depletion Potential (KREISSIG 1999)

# ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Flotex Tile  
Flocked Floor Covering

According to ISO 14025 & EN 15804

## References

GABI 5 2012	PE INTERNATIONAL AG; GaBi 5: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2012.
GABI 5 2012D	GaBi 5: Documentation of GaBi 5: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2012. <a href="http://documentation.gabi-software.com/">http://documentation.gabi-software.com/</a>
NSF International May 22, 2012	Product Category Rule for Environmental Product Declarations <i>Flooring: Carpet, Resilient, Laminate, Ceramic, Wood</i>
UL ENVIRONMENT ERFMI 2008	UL Environment's Program Operator Rules Final report: LCA, Environmental Information Sheet and Ecodesign Model of Resilient Flooring by order of ERFMI, PE International, 2008
IBU 2011	PCR - Part A: Calculation rules for the Life Cycle Assessment and Requirements on the Background Report, Institut Bauen und Umwelt e.V.
PE 2012	Description of Selected Impact Categories, PE International AG, 2012
ILCD Handbook: General guide for Life Cycle Assessment - Detailed guidance	European Commission - Joint Research Centre - Institute for Environment and Sustainability: International Reference Life Cycle Data System (ILCD) Handbook - General guide for Life Cycle Assessment - Detailed guidance. First edition March 2010. EUR 24708 EN. Luxembourg. Publications Office of the European Union; 2010
<b>STANDARDS AND LAWS</b>	
DIN EN ISO 14044	Environmental management - Life cycle assessment - Requirements and guidelines (ISO 14044:2006); German and English version EN ISO 14044
ISO 14025 2006	DIN EN ISO 14025: Environmental labels and declarations — Type III environmental declarations — Principles and procedures
ISO 14040 2006	Environmental management - Life cycle assessment - Principles and framework (ISO 14040); German and English version EN ISO 14040
CEN/TR 15941	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; German version CEN/TR 15941
EN 15804	EN 15804: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products
ISO 24011	Resilient floor coverings - Specification for plain and decorative Flotex tile
CPR	REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonized conditions for the marketing of construction products and repealing Council Directive 89/106/EEC
EN-ISO 10874	Resilient, textile and laminate floor coverings - Classification