








# Sarlibase T.E

## Product description


- Sarlibase T.E. is a free floating flexible subfloor sheet material designed to be used under Forbo floor coverings to cope with moist surfaces when used in conjunction with ventilated skirtings. It is not designed as an acoustic underlay although it does achieve a 7dB rating. Either Corkment or Sarlibase acoustic (indent only) should be used if acoustic performance is required.
- The product has a smooth vinyl surface with a textured foam backing. The texture backing is installed to the subfloor.



 Thickness	EN 428	1.50 mm
 Roll width	EN 426	2.00 m
 Roll length	EN 426	35 m
 Weight	EN 430	1,3 kg/m <sup>2</sup>
 Impact sound reduction	ISO 717-2	7 dB
 Residual indentation	EN 433	0.10 mm
 Fire resistance	ISO 9239-1	CRF 6.8 kw/m <sup>2</sup> Smk dvlp 126 %min

## Points to note

- Due to this unique structure and in conjunction with ventilated skirtings, moisture can still evaporate without damaging the floor covering above it.
- Sarlibase T.E. is loose laid. In doorway areas or at corners it can be fixed down with double sided tape. The floor covering is adhered to it using an acrylic plasticizer resistant emulsion adhesive i.e. Eurocol Eurosafe 540 or Uzin KE 2000S (see installation guide).

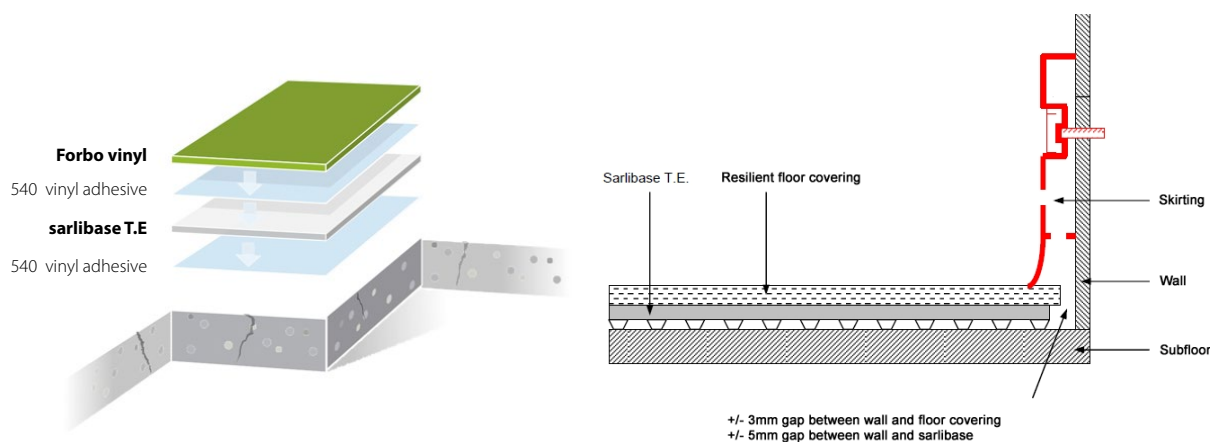

For more information contact your Forbo representative or call 1800 224 471.