

Product quick info

**PD2+ U30 GL-NA-HACCP blue
FDA**

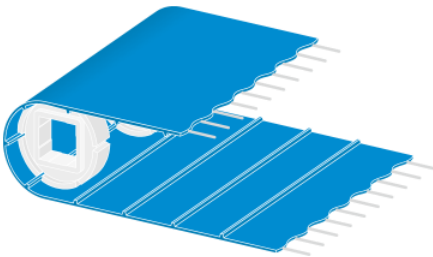
Sketch of cross-section (not actual size)

Applications

- Processing of fatty and oily foods
- Processing of unpackaged food
- Meat, poultry, fish, bakery and confectionery industries
- Agricultural and dairy applications

Properties/Advantages

- Form-fit sprocket drive PD2; profile height 5 mm, pitch 49.9 mm
- Cord reinforced homogenous belt for higher load (no elongation)
- Smooth running
- Smooth surface top face (GL): Optimum grip and good release of wet/moist products
- HACCP design, easy to clean
- Aramid cords reinforced homogenous belt for higher load (no elongation)
- Suitable for simple conveyor designs => alternative to plastic modular belts
- Non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to FDA, EU and MHLW 370

**Basic technical data**

Top face	Polyurethane, smooth
Underside	Polyurethane, Positive Drive (PD2)
Article no.	640009
d _{min} [mm]	95
Thickness (deck) [mm]	3
Total thickness [mm]	8
k ₁ % relaxed [N/mm width]	9
Weight [kg/m ²]	4.1
Permitted operating temperature [°C]	-10 to +70

Product Quick Info | EN | 11.2024

FMS - Reproduction of text or parts thereof only with our approval. Modifications reserved.

Forbo Siegling GmbH
Lilienthalstrasse 6/8, D-30179 Hannover
Phone +49 511 67 04 0
www.forbo-siegling.com, siegling@forbo.com