


Forbo Flooring Systems is part of the Forbo Group, a global leader in flooring, bonding and movement systems, and offers a full range of flooring products for both commercial and residential markets. High quality linoleum, vinyl, needle punch and hardwood floors combine functionality, colour and design, giving you total flooring solutions for any environment.



**United Kingdom**

Forbo Nairn Ltd  
PO Box 1  
Kirkcaldy  
Fife KY1 2SB  
T: 01592 643777  
F: 01592 643999  
info.uk@forbo.com  
www.forbo-flooring.co.uk



LFQUICKFIT



**forbo quickfit**  
subfloor system



creating better environments




SUBFLOOR SYSTEM

creating better environments

# Forbo Quickfit Subfloor System

Loose lay system with self-sticking Forbo Foam

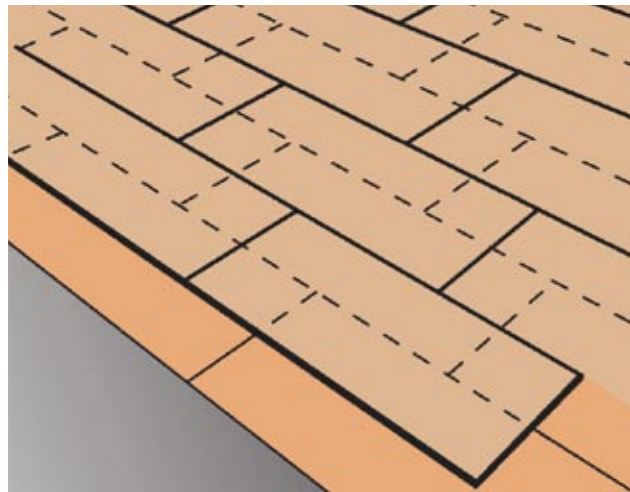


## Rapid QuickFit subfloor system

Forbo Quickfit is an instant, loose lay, subfloor system with a self-adhering Forbo foam underlay – it is ideal for linoleum and vinyl floorcoverings in both commercial and residential projects. Wood or cementitious subfloors can be levelled quickly and easily without any “grin through” from the subfloor panels. An ideal solution, as a smooth subfloor is essential for a perfectly installed floor.


The upper and lower panels are pre-coated on one side with adhesive and are ready for installation. After installation, the floorcovering can be fully adhered to the Forbo Quickfit panels. Forbo Quickfit panels should always be installed on Forbo foam or a similar product. The 4mm PE foam underlay performs as an excellent moisture barrier and provides additional impact sound reduction (23dB with 2mm Marmoleum).

No specialist tools are required for the installation of Quickfit. It is a floating construction, which can be easily removed at the end of its life.

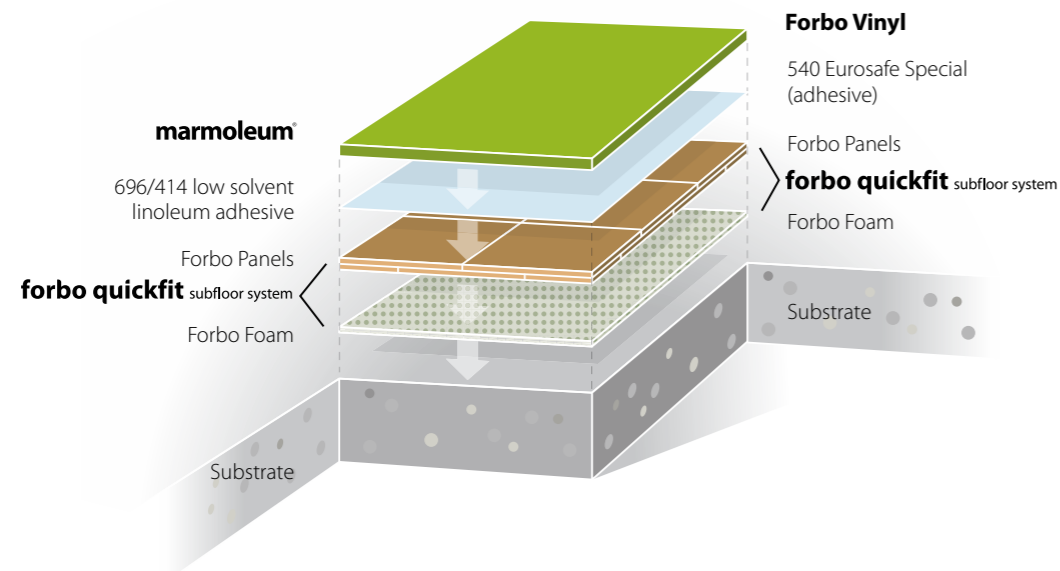

## QuickFit advantages:

- Quick and easy installation
- Smoothing of uneven subfloors
- No “grin through” from subfloor panels
- Ideal for refurbishment projects
- Excellent moisture barrier
- Easily removed
- Improved sound insulation - 23dB (EN 717-2)
- Self-adhering Forbo foam

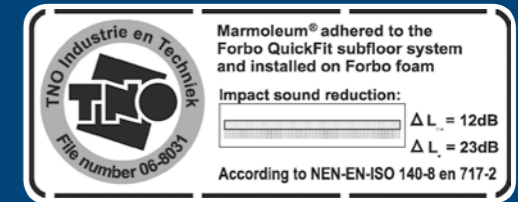

## QuickFit panels

Each pack contains 5 lower panels 3mm thick (coloured adhesive) and 5 upper panels 4mm thick (clear adhesive); each panel measures 120 x 60cm. A pack of panels covers 3.6m<sup>2</sup>; 36m<sup>2</sup> per pallet.

Shelf life: 12 months (unopened), store in cool and dry conditions, avoid high temperatures and frost. Allow the panels to acclimatise in the room for 24 hours before installation.

Installation instructions are included in each pack and available online at [www.forbo-flooring.co.uk](http://www.forbo-flooring.co.uk)



## Forbo Foam

Roll of 25 linear metres PE foam, 100cm wide, 4mm thick. The foil top layer incorporates a self-adhesive overlap of 20 cm for secure seams.

## Total Solutions

The Rapid Quickfit System is just one of a series of System Solutions offered by Forbo Flooring Systems. A range of everyday installation problems can be overcome with our Acoustic, High Tolerance, Static Control and Sustainable System Solutions.



**To request our System Solutions brochure please call 0800 731 2369.**