

## NUWAY CONNECT WITH CORAL CLASSIC TEXTILE INSERT

Combination	Textile only						Textile and 4 row bristle					
	Open			Closed			Open			Closed		
System	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm
Depth to height of aluminium (mm)	8	14	19	8	14	19	8	14	19	8	14	19
Depth to height of insert (mm)	11	17	22	11	17	22	15	21	26	15	21	26
Distance between the profiles (mm)	5			0			5			0		
Weight (kg/m <sup>2</sup> )	9.5	13.2	14.9	10.5	15.1	17.1	11.1	15.1	16.9	12.4	17.4	19.4
Max width per module (mm)	3000											
Max depth per module (mm)	Relates to the weight											
Max weight per module (kg)	23											
Max static load (kg/cm <sup>2</sup> )	200	200	200	200	200	200	100	100	100	100	100	100
Dynamic load (kg) 2 wheels, 80mm 20,000 passes	200	200	200	200	200	200	50	50	50	50	50	50
Fire behaviour EN ISO 9239-1	B <sub>fl</sub> s1						C <sub>fl</sub> s1					
Frame	A selection of recessed matwell frames are available											
Ramp frame	ARF 50	ARF 70		ARF 50	ARF 70		ARF 50	ARF 70		ARF 50	ARF 70	
Material and manufacturing method	Anodised aluminium profiles with PVC connector profiles, stainless steel clips											
Wiper design	Coral clean-off system						Coral clean-off system and 4 row bristles					
Wiper material	100% polyamide BCF						100% polyamide BCF for both textile and bristles					

## NUWAY CONNECT WITH BRISTLE

Combination	Bristle only						Bristle and Rubber					
	Open			Closed			Open			Closed		
System	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm
Depth to height of aluminium (mm)	8	14	19	8	14	19	8	14	19	8	14	19
Depth to height of insert (mm)	15	21	26	15	21	26	15	21	26	15	21	26
Distance between the profiles (mm)	5			0			5			0		
Weight (kg/m <sup>2</sup> )	12.7	17.1	18.8	14.2	19.6	21.6	12.3	16.6	18.3	13.8	19.1	21.1
Max width per module (mm)	3000											
Max depth per module (mm)	Relates to the weight											
Max weight per module (kg)	23											
Max static load (kg/cm <sup>2</sup> )	100	100	100	100	100	100	100	100	100	100	100	100
Dynamic load (kg) 2 wheels, 80mm 20,000 passes	50	50	50	50	50	50	50	50	50	50	50	50
Fire behaviour EN ISO 9239-1	C <sub>fl</sub> s1						C <sub>fl</sub> s1					
Frame	A selection of recessed matwell frames are available											
Ramp frame	ARF 50	ARF 70		ARF 50	ARF 70		ARF 50	ARF 70		ARF 50	ARF 70	
Material and manufacturing method	Anodised aluminium profiles with PVC connector profiles, stainless steel clips											
Wiper design	4 row bristles						4 row bristles and ribbed rubber					
Wiper material	100% polyamide BCF						100% polyamide BCF for bristles and 100% EPDM for rubber					

To find out more about how our Nuway ranges help to create better environments, please visit our web site and download the environmental data sheets [www.forbo-flooring.co.uk/cbedownloads](http://www.forbo-flooring.co.uk/cbedownloads)

Please note EPDM rubber is Ethylene Propylene Diene Monomer.

# TECHNICAL SPECIFICATIONS


## NUWAY CONNECT WITH RUBBER OR ULTRAGRIP RUBBER

Combination	Rubber only						Ultragrip safety rubber only					
	Open			Closed			Open			Closed		
	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm	10mm	17mm	22mm
Depth to height of aluminium (mm)	8	14	19	8	14	19	8	14	19	8	14	19
Depth to height of insert (mm)	12	18	23	12	18	23	10	16	21	10	16	21
Distance between the profiles (mm)	5			0			5			0		
Weight (kg/m <sup>2</sup> )	12	16.2	17.9	12	16.2	17.9	12	16.2	17.9	12	16.2	17.9
Max width per module (mm)	3000											
Max depth per module (mm)	Relates to the weight											
Max weight per module (kg)	23											
Max static load (kg/cm <sup>2</sup> )	100	100	100	100	100	100	100	100	100	100	100	100
Dynamic load (kg) 2 wheels, 80mm 20,000 passes	100	100	100	100	100	100	100	100	100	100	100	100
Fire behaviour EN ISO 9239-1	C <sub>fl</sub> s1						B <sub>fl</sub> s1					
Frame	A selection of recessed matwell frames are available,											
Ramp frame	ARF 50	ARF 70		ARF 50	ARF 70		ARF 50	ARF 70		ARF 50	ARF 70	
Material and manufacturing method	Anodised aluminium profiles with PVC connector profiles, stainless steel clips											
Wiper design	Ribbed rubber						Coarse rubber					
Wiper material	100% EPDM						Rubber					


To find out more about how our Nuway ranges help to create better environments, please visit our web site and download the environmental data sheets [www.forbo-flooring.co.uk/cbedownloads](http://www.forbo-flooring.co.uk/cbedownloads)

### MAIN DIMENSIONS SHOWN IN MM

#### Nuway connect 10mm

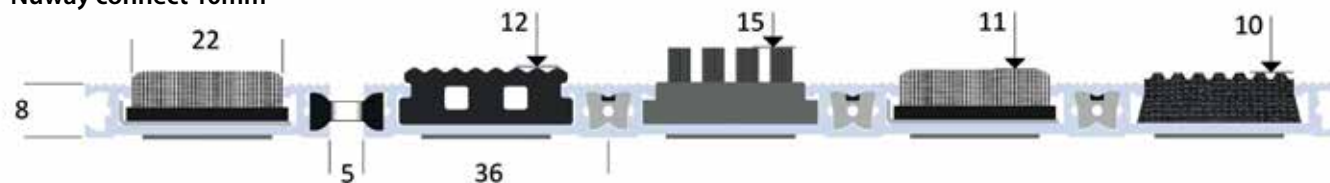

#### Nuway connect 17mm

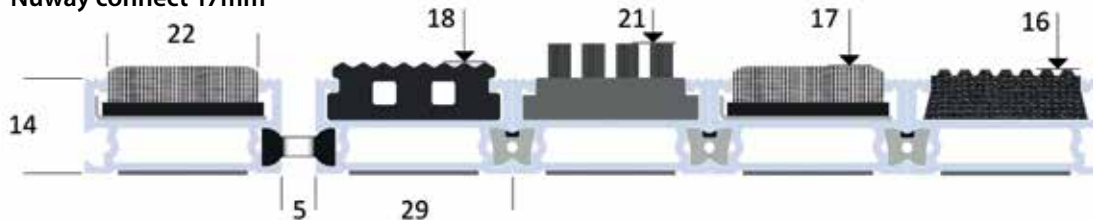

#### Nuway connect 22mm

