

	12mm Grid		17mm Grid	
Maximum length per module	3000mm		3000mm	
Maximum width per module	750mm		750mm	
Maximum weight per module	23kg		23kg	
	Rubber	Textile	Rubber	Textile
Depth to height of aluminium	12mm	12mm	17mm	17mm
Depth to height of infill	14mm	18mm	19mm	23mm
Infill material	Ultragrip Safety Rubber	Burford/Coral Classic/ Coral Brush	Ultragrip Safety Rubber	Burford/Coral Classic/ Coral Brush
Construction	Closed		Closed	
Total weight	10.5kg/m ²	Approx 9kg/m ²	17.2kg/m ²	Approx 15kg/m ²
Max static load (kg/cm ²)	100		100	
Dynamic load (kg) 2 wheels 80mm, 20,000 passes	200		200	
Fire behaviour EN ISO 9239-1	Ultragrip B _{fl} s1		Textile B _{fl} s1	
Ramp frame model	ARF 50		ARF 70	
Manufacturing method	Entrance flooring system with carriers and rubber infills	Entrance flooring system with carriers and textile infills	Entrance flooring system with carriers and rubber infills	Entrance flooring system with carriers and textile infills
Wiper material	Rubber	Needlefelt/PVC backed textile	Rubber	Needlefelt/PVC backed textile
Pile material	N/A	100% polypropylene (Burford) /100% polyamide (Coral)	N/A	100% polypropylene (Burford) /100% polyamide (Coral)


To find out more about how our Nuway ranges help to create better environments, please visit our website and download the environmental data sheets www.forbo-flooring.co.uk/cbedownloads



To see full range of inserts, please visit www.forbo-flooring.co.uk/Nuway




Nuway Grid 12mm

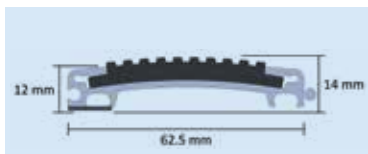

Nuway Grid 12mm with Ultragrip insert


Nuway Grid 17mm

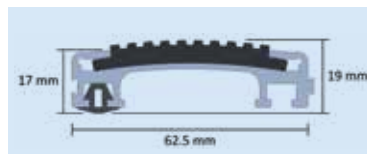


Nuway Grid 17mm with Ultragrip insert



Nuway Grid 12mm with textile insert

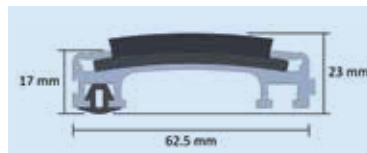

Nuway Grid 17mm with textile insert

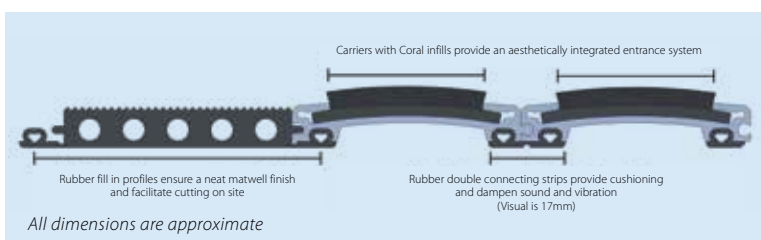

CONSIDERATIONS

In very brightly lit areas the strong contrast between a light aluminium scraper bar and a dark wiper strip can sometimes create a strobe effect, which should be avoided.

To avoid disorientating pedestrians affected by this type of visual disturbance consider using a less contrasting insert. Contact our Entrance Flooring Systems Customer Service team on **01773 740 688** to ensure compatibility.