

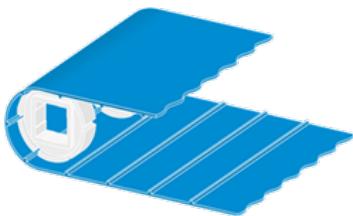
## Product quick info

**PD2 U30 GL-NA-HACCP BL  
FDA**

Sketch of cross-section (not actual size)

**Applications**

- Standard belt for food conveying
- Inclined conveying and positioning of foodstuffs
- Processing fatty and oily foods
- Processing of unpackaged food
- Meat, poultry, fish, bakery and confectionery industries
- Agricultural and dairy applications

**Properties/Advantages**

- Homogenous belt
- Form-fit sprocket drive PD2; profile height 5 mm, pitch 49.8 mm
- Cord reinforced homogenous belt for higher load (no elongation)
- Smooth running
- HACCP design, easy to clean
- Optimum grip and good release of wet/moist products
- Non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to FDA, EU and MHLW

**Basic technical data**

Top face	Polyurethane, smooth
Underside	Polyurethane, Positive Drive
Article no.	640006
d <sub>min</sub> [mm]	60
Total thickness [mm]	3.0/8.0
C3 value [N/mm]	6.0
Weight [kg/m <sup>2</sup> ]	4.5

Permitted operating temperature [°C] -10 to +70

Product Quick Info | EN | 01.2026

FMS · Reproduction of text or parts thereof only  
with our approval. Modifications reserved.

Forbo Siegling GmbH  
Lilienthalstrasse 6/8, D-30179 Hannover  
Phone +49 511 67 04 0  
www.forbo-siegling.com, siegling@forbo.com