

Product quick info

**FLT U30 NP/MT-NA-HACCP BL
FDA**

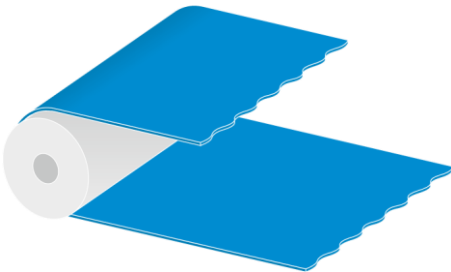
Sketch of cross-section (not actual size)

Applications

- Accumulation belt / Discharge belt
- Dough conveying
- Processing of dairy products
- Fruit & vegetable processing

Properties/Advantages

- Top face: good accumulation and optimal product release
- Driving face: reduced friction when running over stainless-steel tables, optimum water displacement
- HACCP design
- Non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to EU, FDA 21 CFR and MHLW (No. 370)
- Laterally flexible and troughable

**Basic technical data**

Top face	Polyurethane, MT
Underside	Polyurethane, NP
Article no.	640018
d _{min} [mm]	40
Total thickness [mm]	3.4
k _{1%} relaxed [N/mm width]	1.75
Weight [kg/m ²]	3.65
Permitted operating temperature [°C]	-10 to +70

Product Quick Info | EN | 11.2024

FMS - Reproduction of text or parts thereof only with our approval. Modifications reserved.

Forbo Siegling GmbH
 Lilienthalstrasse 6/8, D-30179 Hannover
 Phone +49 511 67 04 0
 www.forbo-siegling.com, siegling@forbo.com