

Product quick info

**CD40+ 1R U30 MT-NA-HACCP
BL FDA**

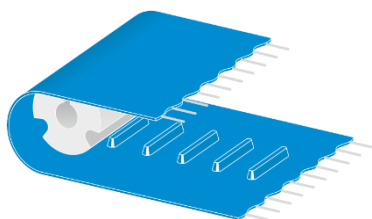
Sketch of cross-section (not actual size)

Applications

- Accumulation belt / Discharge belt
- Dough conveying
- Processing of dairy products
- Fruit & vegetable processing
- Snack food production

Properties/Advantages

- Cord reinforced homogenous belt with increased belt strength for higher load and long-distance transportation (cord spacing = 12.5 mm (0.49 in))
- Easy to clean
- Form-fit power transmission via sprockets with self-tracking properties
- Smooth running
- Optimal accumulation and optimal product release
- Complies to the regulation for direct contact to foodstuffs accord. to FDA, EU and MHLW

**Basic technical data**

Top face	Polyurethane, matte
Underside	Polyurethane, Center Drive
Article no.	640030
d _{min} [mm]	76
Total thickness [mm]	3.0/ 10.5
C3 value [N/mm]	6.0
Weight [kg/m ²]	3.5

Permitted operating temperature [°C] -10 to +70

Product Quick Info | EN | 02.2026
FMS · Reproduction of text or parts thereof only
with our approval. Modifications reserved.

Forbo Siegling GmbH
Lilienthalstrasse 6/8, D-30179 Hannover
Phone +49 511 67 04 0
www.forbo-siegling.com, siegling@forbo.com