

ADHESIVES

MANDATORY


	Adhesives	Weight	Consumption /m²	Spreader	Waiting time	Opening time	Observation
Allura Dryback Enduro	540 Eurosafe Special	13 kg	250 g	A2	20 min	60 min	High-performance technical adhesive.
	640 Eurostar Special	13 kg	250 g	A2	20 min	60 min	GREEN (EC1) high-performance technical adhesive.
	644 Eurostar Multi Plus	12 kg	240 g	A1/A2	10 min	40 min	Fiber-reinforced universal adhesive, GREEN (EC1+), high-performance.
	528 Eurostar All Round	13 kg	250g	A2	15 min	40 min	Multi-purpose EC1 construction adhesive.
Allura Flex Allura Decibel	542 Eurofix Tack Plus	10 kg	100 g	A1/roller	30 min (absorbent support) 60 min (waterproof support)	Keeps its properties in time	Product for fixing removable PVC tiles.

SKIRTINGS

SUGGESTED

Matching skirting 60mm

100% PVC skirting height 60mm matching with all references of Allura combine collection (collection which includes Allura Dryback, Allura Flex and Allura Decibel) and also Enduro floorcovering. High-definition printing mass tinted.

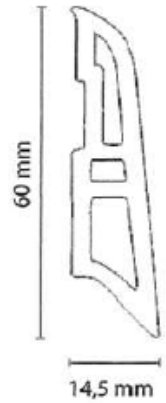

Box of 10 lengths of 2,5 m namely 25 m per box



HOW TO REALIZE ENDING CAPS FOR MATCHING SKIRTING

To realize a perfect ending caps for Matching skirting collection you need to have:

- An automatic or manual cross-cut saw.
- A coldwelding Type C or a methacrylate-based thread locking adhesive like Loctite.

Instructions

1. Cut the skirting at 45° taking care to position the backing skirting (part without design) on the vertical guide of the cross-saw cut. The angle cut at 45° should be realized to get an internal cut and not external as you can see on the picture.



2. To do the ending cap which will be glued with the previously cut skirting you must take a small piece with two straight edges and cut the left part in the same way as previously (internally) on the right to realize the left ending cap and on the left to realize the right ending cap. The thickness of the matching skirting is 15mm so the ending cap must be cut at 15mm to get the result as you can see in the below picture of the right ending cap.



3. Glue the ending cap and the skirting with a cold-welding type C or methacrylate-based thread locking adhesive like Loctite.