

Technical Specifications: QuickFit System







Forbo's QuickFit system is a floating MDF substrate that is not bonded to the subfloor provides a smooth and flat finish surface for resilient flooring installation while mitigating issues beneath.

The system comprises self-adhering MDF panels and sound insulating polypropylene Forbo Foam with a self-sticking foil overlap of 20 cm, acting as a suitable moisture barrier and is easily removable.

Forbo Foam must be used with QuickFit panels over all types of subfloors and substrates.




- Ideal solution for protecting heritage listed floors, providing a smooth surface finish on uneven/contaminated subfloors, and temporary installation.
- QuickFit offers Improved impact sound insulation in combination with Forbo foam ($\Delta L_w = 23$ dB according to EN-ISO 140-8 and 717-2).
- Overlapping installation of QuickFit panels is rapidly achieved as they are provided with a self-sticking contact adhesive. Pre-printed installation markings on the panels to help installers save time, the panels are easy to separate since they are packed in an efficient way. Due to improved production processes, the edges of the boards remain clean, this way of packing and production minimises the need for abrasive corrections after installation.

		QuickFit Panel	Forbo Foam
	Thickness	EN 428	Lower panel: 3 mm Upper panel: 4 mm
	Roll width	EN 426	100 cm
	Roll length	EN 426	25 lm
	Panel size		120 x 60 cm 1 pack covers 3.6 m ²
	Impact sound reduction	ISO 717-2	$\Delta L_w = 23$ dB (in combination with Marmoleum 2.5mm, QuickFit panel and Forbo Foam)
	Fire resistance	ISO 9239-1	QuickFit system in combination with Marmoleum 2.5 mm: CRF: 5.0 kW/m ² & Smoke development: 309%.min QuickFit system in combination with vinyl sheet: CRF: 4.5 kW/m ² & Smoke development: 312%.min

Points to note

- When trimming seams in the floor covering take care not to cut into the surface of the underlay. Avoid double cutting seams on the underlay if possible or use suitable protection between the underlay and the floor covering.
- Forbo's polypropylene foam covered by a metallised foil is to be installed with the foam side facing the subfloor.
- QuickFit panels now come with a **plastic film covering each panel which must be peeled off to expose the contact-type adhesive**. If the plastic film is not removed the panels will not form a bond when pressed together.

For further information, [see our installation guide](#).

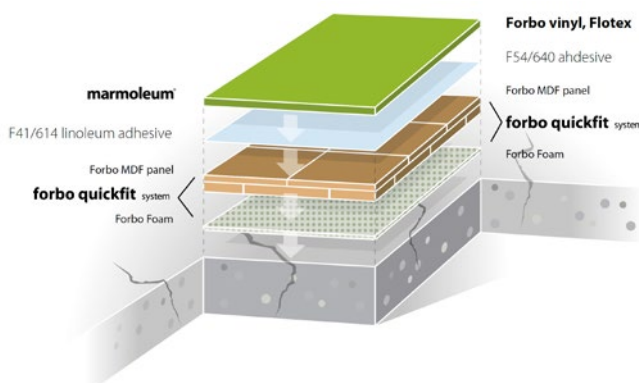

✉ info.au@forbo.com
 ☎ 1800 224 471
 🌐 forbo-flooring.com.au

Forbo

FLOORING SYSTEMS