








# Technical Specification: Sarlibase TE Underlay

Sarlibase TE underlay is an impervious loose lay underlay for use over damp or contaminated subfloors or in situations where conventional subfloor preparation cannot be carried out; for example, due to time constraints, or where the existing floor covering cannot be removed.

It is a stable underlay made up of a glass fibre scrim with a smooth vinyl top surface and a textured foam backing.

It can be used with Forbo compact vinyl and linoleum floorcoverings, Tessera bitumen backed carpet tiles and Flotex sheet and PVC backed tiles. Sarlibase is not recommend for use with foam backed or acoustic floor coverings, linoleum or PVC tiles. It is also not recommended for use in hygiene sensitive areas such as clinical areas or clean rooms.

The product has a smooth vinyl surface with a textured foam backing. The texture backing is installed to the subfloor.


	Thickness	EN 428	1.50 mm
	Roll width	EN 426	2.00 m
	Roll length	EN 426	35 m
	Weight	EN 430	1,3 kg/m <sup>2</sup>
	Impact sound reduction	ISO 717-2	7 dB
	Residual indentation	EN 433	0.10 mm
	Fire resistance	ISO 9239-1	CRF 6.8 kw/m <sup>2</sup> Smk dvlp 126 %min

## Points to note

Due to this unique structure and in conjunction with ventilated skirtings, moisture can still evaporate without damaging the floor covering above it.

Sarlibase TE is loose laid. In doorway areas or at corners it can be fixed down with double sided tape.

The floor covering is adhered to it using an acrylic plasticiser resistant emulsion adhesive i.e. Eurocol Eurosafe 540 Special (see installation guide; [www.forbo-flooring.com.au/installation](http://www.forbo-flooring.com.au/installation)).

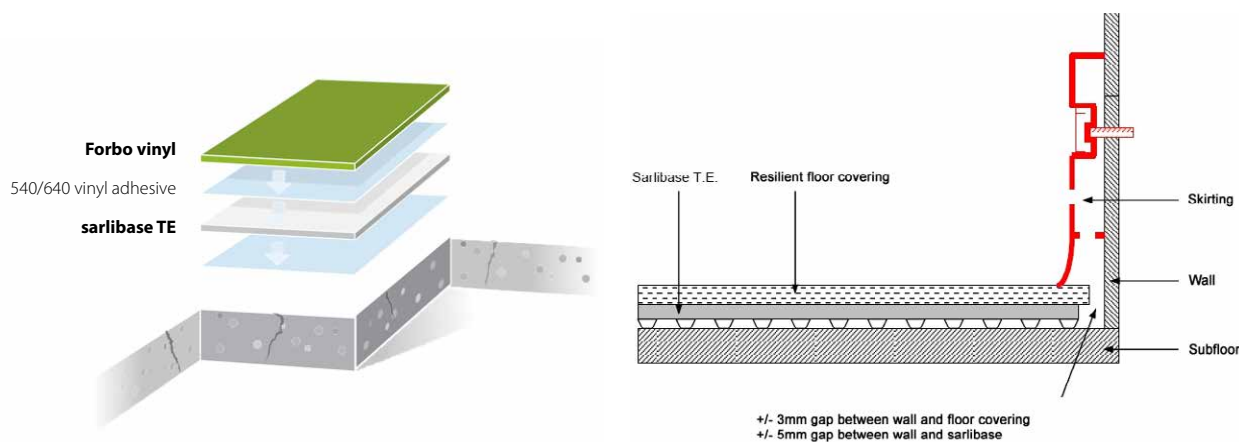

For more information, please visit [www.forbo-flooring.com.au/installation](http://www.forbo-flooring.com.au/installation) or call us on 1800 224 471.