
October 2016



coral® entrance flooring

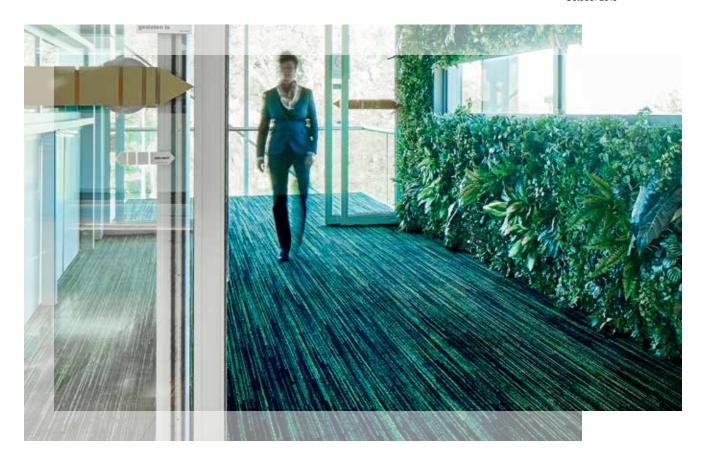

coral®

The first steps in protecting your building

There's a way to keep your floor and premises looking clean and presentable year in year out, as well as a way to offer your visitors and employees a safe and hygienic environment. All you need is a well thought-out entrance system.

Forbo Coral entrance flooring delivers superior performance in even the toughest environments. Whether facing rain, snow, sand or soil, Coral keeps the outside from getting inside. Coral entrance floors are highly functional and, through their design options, always form an integral part of the building's design scheme.

Coral has been the international market leader in textile entrance flooring for almost 50 years and now offers you more choice than ever before. Each individual range in the collection has been designed to interact with different soiling behaviour as every entrance is a unique environment.



With our products we aim to create better quality interior environments in which people can live, work and learn. Our Coral entrance products help to ensure that buildings are safe and hygienic in all weather conditions.

The WELL Building Standard® also recommends the use of entrance matting as an important tool to reduce pollutants entering the building.



Contents

- 2 Introduction
- 4 Why choose Coral?
- 8 Coral Welcome
- 10 Coral Brush
- 12 Coral Classic
- 14 Coral Duo
- 16 Coral Logo
- 18 Coral Tiles
- 19 Nuway
- 20 Technical table
- 22 More Flooring
- 23 What to do next









noleum, wood and concrete are less

ikely to become slippery and dangerous









environmental impact has led us to work very are able to incorporate ever higher levels of





REDUCTION in cleaning time Cleaning Research International has shown that the cost of maintenance is 86% of the total life cycle cost of commercial floor coverings. A well designed Coral entrance flooring system incorporating a 3-step clean-off zone is a highly effective way to cut your future maintenance costs. By stopping up to 95% of walked-in dirt and moisture from reaching your building's floors, Coral can reduce cleaning time for floor coverings by up to 65% and prolong the life of your floor finishes and coverings.







Coral can be used alongside Nuway entrance flooring to further protect your interior space.



Enhance your entrance flooring by using **Coral Logo to express** your logo or identity.

Produced with green electricity from renewable resources

All the electricity we buy comes from renewable sources. This means our Coral production site is part of an effective environmental management system and has achieved ISO 14001 certification.

Many Coral products use Econyl[®] yarn which is made from used and abandoned fishing nets.




Using Econyl[®] is a way to reduce existing waste, avoid additional manufacturing-related pollution, and keep the consumption of natural resources and energy to a minimum.

MODULARITY coral classic and coral brush

are available in tile format for increased flexibility and reduced installation waste.

6 metres of Coral can stop up to 95% of dirt and moisture entering a building.

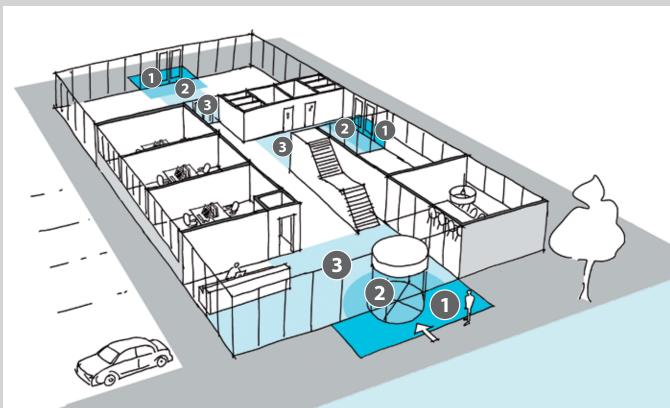

ENTRANCE FLOORING STARTS OUTSIDE AND BRINGS YOU INSIDE

If you really want to keep your building clean and safe, it's not enough to just put down an entrance mat in front of the door.

Creating a good entrance flooring system means thinking about footfall – the number of people walking in and out in a given period – and walking routes (the directions they take once inside) and applying that information in the design of the entrance area.

One of the best ways to plan an entrance flooring system is to think in terms of applications. The table opposite is designed to help you select which Coral entrance product best meets your needs.

INTENSE TRAFFIC AREAS AND HIGH POINT LOADS

For those entrances with extreme footfall, wheeled traffic or outside entrances, such as shopping centres, leisure outlets or transport hubs, our Nuway range of rigid entrance systems may be more suited to your needs.

For further information, please ring **0800 731 2369** for a Forbo Entrance Flooring Systems brochure or visit **www.forbo-flooring.co.uk/nuway**



A well designed Coral entrance flooring system is an investment, not a cost.

Testing by Cleaning Research International has shown that by stopping up to 95% of walked-in dirt and moisture, Coral reduces the time spent cleaning the building's other floor coverings by up to 65%.

The savings made within 6 months means that the product and fitting costs for Coral are recouped within 6 months of use! For full details go to www.forbo-flooring.co.uk/coralpayback



entrance flooring applications



OUTSIDE USE (NUWAY ONLY)

Any matting placed outside the building entrance creates the first line of defence against foot-borne soil by scraping the coarsest dirt from the soles of shoes before they cross the threshold.



INSIDE USE

Moving inside, the next line of defence, is used to remove moisture and finer dirt particles from all feet entering the building.



OTHER CIRCULATION AREAS

Other areas in the building also suffer from soil and moisture; reception areas, corridors, walkways to other parts of the building, elevators, staircases, exits, etc. All these areas are prone to residual soiling and will benefit highly from a purposely designed Coral entrance floor to absorb this soiling.

А	pplicatio	on 📴	dit	ECO ECO	
coral® _{duo}	2	•••0	••••	••00	1
coral®brush	2+3	••••	•••0	•••0	1
coral®welcome	2+3	••••	•••0	••••	✓
coral [®] classic	2 + 3	••••	••00	••00	✓
coral [®] logo	2+3	•••0	••00	•000	✓









Where design meets

environment

With its contemporary linear design and rich, deep pile, Coral Welcome packs the style and aesthetic appeal of a luxury carpet. It makes an unequivocal statement in any entrance area.

Coral Welcome is more than just a fabulous looking floor covering – it's an environmentally advanced one as well. The secret lies in its use of ECONYL® 100%-regenerated yarn, which is made from regenerated industrial and postconsumer waste. Abandoned fishing nets are one of the sources. Taking the environmental aspect even further, the primary backing is made from recycled




- 100% of the yarn in Coral Welcome is Econyl® regenerated solution dyed polyamide
- Primary backing made from recycled PET bottles
- Prevents moisture and dirt being tracked onto interior surfaces
- · Striking linear aesthetic which makes a design statement in
- · Complies with the highest fire class standard for a textile product: B_{fl}-s1
- Suitable for heavy contract use: wear class 33
- · Ideal for interior entrances and circulation areas














Forbo works closely with suppliers who share our determination and ambition to make evergreater use of regenerated and recycled materials.





3207 | blue velvet

coral[®] brush

The great all-rounder

Coral Brush is suitable for all types of entrance areas, absorbing moisture and removing dry soiling as the weather demands. Created around simple, solid and linear designs, this collection works well with any interior, serving as an eye-catcher or self-effacing support for the rest of the floor design.

Coral Brush is made of three types of yarn, each offering a different benefit, while the space between the yarns serves to hide dirt, which ensures a clean appearance for longer.

The Coral Brush range is also available in tile format for increased flexibility. See page 18 for more information.



- · Functional all-rounder that removes both moisture and dirt
- 100% of the yarn in Coral Brush is Econyl® regenerated solution dyed polyamide
- Appealing solid and linear designs
- Complies with the highest fire class standard for a textile product: $B_{\rm fl}$ =s1
- Suitable for heavy contract use: wear class 33
- Ideal for interior entrances and circulation areas
- Available in sheet, mats and 50 x 50 cm tiles













ECONYL

Coral Brush offers a choice of 18 colourways that can be used with each other or in combination with other Coral ranges.



LRV 4 5721 | hurricane grey

LRV 3 5710 | asphalt grey

LRV 2 5705 | Bondi blue

coral[®] classic











The ultimate moisture absorber

Research shows that taking just two steps on Coral Classic's moisture absorbing yarns is enough to absorb half of the foot-borne moisture that would otherwise be carried inside on the soles of people's shoes.

A few steps more and your feet are as dry as possible. This has clear benefits. First, the interior floor coverings stay cleaner, longer. Second, resilient floors such as vinyl, ceramics, wood and concrete are less likely to become slippery and dangerous.

Independent tests have shown that Coral Classic will maintain its performance – and appearance – for years to come thanks to the use of solution dyed yarns that quarantee its appearance throughout its lifespan.

The Coral Classic range is also available in tile format for increased flexibility. See page 18 for more information.



- · Maximum moisture absorption and effective dirt removal
- Choice of practical colourways
- Complies with the highest fire class standard for a textile product: $B_{\rm fl}$ -s1
- Suitable for heavy contract use: wear class 33
- · Ideal for interior entrances and circulation areas
- Available in sheet, mats and 50 x 50 cm tiles




Coral Classic will maintain its functionality and appearance for years to come thanks to the use of solution dyed yarns.




4730 | raven black | LRV 2 | 4721 | mouse grey | LRV 4

4701 | anthracite LRV 6 4751 | silver grey LRV 9 4727 | navy blue LRV 2

















The ultimate dirt and moisture remover

A short entrance and clean interior floor coverings don't go together, do they? Well, yes, they can. Coral Duo is the ideal solution when you need maximum dirt removal, unrivalled dirt retention and exceptional moisture absorption, all in just a couple of paces.

Research has shown that Coral Duo retains 10% more dirt in the first few metres than any other textile entrance flooring solution on the market. Which makes it the best choice for smaller entrances. Featuring a ribbed construction. Coral Duo is not only functional, it also provides an aesthetically pleasing aspect to any entrance area and is easy to combine with our Coral Brush and Coral Classic collections.

The direction in which Coral Duo is produced is not the traffic direction. Coral Duo should be installed with the ribs at right angles to the direction of traffic.



- Ideal solution for most entrances and especially smaller entrances
- 75% of the yarn in Coral Duo is Econyl® regenerated solution dyed polyamide
- Unbeatable performance for moisture and dirt removal
- · Complies with the highest fire class standard for a textile product: B_{fl}-s1
- Suitable for heavy contract use: wear class 33
- · Ideal for interior entrances and circulation areas









9730 | black diamond LRV 1





LRV 4 9723 | African red



Coral Duo is reinforced with alternating strips of strong, thick yarns with additional dirt-scraping properties.



9724 | cafe supreme

LRV 2 9714 | Sicilian sand

Make a lasting impression

Forbo has the capability to offer a bespoke print or cut-out design service that can be tailored to your precise design specification, offering individuality and a unique point of difference.

Our Coral Logo collection offers a wide range of bright attractive colours. Depending on the colours and design of your corporate identity, you can choose between a printed mat or one with a cut inset logo. The Coral Logo collection is designed to the same standards as all other Coral products, which means it will retain its looks whilst keeping out dirt and moisture for years to come.



Printed logo mat

- · Excellent visual quality and bright colouring
- Best to use for complicated designs with multiple colours
- 42 standard colours available
- Pantone and RAL colours can be matched

Cut inset logo mat

- Best to use for extreme traffic conditions and maximum functional performance.
- Any colour from the standard Forbo Coral collection can be used for the base background and logo colours.
- Easy to combine as inlay in larger Coral installations.






coral logo Technical specifications

ıni	ical specificat	ions			04	03	02
_			Coral Log	go (43xx)*			
} ⊤	otal thickness	ISO 1765	Appro:	x. 8 mm			
v	Vear classification	EN 1307	31, comm	nercial light	35	11	12
Α	Available sizes		Standard mat sizes (sizes with edges)	Special sizes (sizes without edges)			
) (a	all sizes are approx.) Roll sizes with 2.5 cm		55 x 90 cm	any width, any length	37	24	14
е	edge each side		105 x 155 cm 105 x 300 cm				
) N	Mat sizes with 2.5 cm		155 x 197 cm 155 x 300 cm	-			
e	edge all sides		197 x 197 cm 197 x 300 cm	up to 192 cm wide	20	15	17
c	Colour fastness ratings:	1					
3_	Light	EN ISO 105/B02	>	> 5	25	43	44
	Rubbing	EN ISO 105/X12	4	l-5			
	Water	EN ISO 105/E01	4	l-5			
Ν	Manufacturing method/t	ype	Tufted, 1/	/8" cut-pile	29	28	33
D	Designs		Hi-definition	custom print			
P	Pile material		100% High Twist	Nylon polyamide			
Т	uft base		Non-wove	n polyester	38	39	0!
В	Backing phthalate free vi	nyl	EVERFO	DRT vinyl			
т	otal weight	ISO 8543	Approx. 33	50 gram/m²			
P	Pile installation weight	ISO 8543	Approx. 68	30 gram/m²	09	07	08
P	Pile thickness	ISO 1766	Appro	x. 5 mm			
P	Pile density	ISO 8543	0.113 g	ram/cm³			
N	Number of tufts	ISO 1763	Approx. 1	10.000/m²	23	36	13
2 c	Comfort class	EN 1307	L	C2			
c	Other remarks		Moisture absorption Production tolera	capacity: 600 g/m² on capacity: 3-4 l/m² ance of 5% on size colour	41	19	40
	All Coral products meet t excluding loose-laid mat		EN 14041,	C € EN 14041	27	21	06
F	ire behaviour	EN 13501-1	B _f	₁ -s1			
s	lip resistance	EN 13893	[OS			
_ د	Personal charging		< 2	2 kV	32	31	30

coral® tiles

Coral tiles combine all the moisture absorbing properties of Coral Classic and Coral Brush but with the flexibility that comes with 50 x 50 cm tile formats. Using Coral tiles can reduce cut off waste and also allows for quicker installation. This is particularly relevant when downtime or retail store opening times are at stake. In addition the increased flexibility of fitting 50 x 50cm tiles also allows easier storage and handling.



Coral tiles are available in all colours from the Coral Classic and Brush collection. The colours of both collections can be mixed for a very functional, though very attractive entrance at the same time. Coral tiles offer the same product features as the Coral Classic and Brush sheet range. The tiles can be laid monolithic or tessellated. Please visit www.forbo-flooring.co.uk/coral for further Coral tile installation images.

Coral tiles are packed 12 tiles in a box (3 m²). Coral tiles have a phthalate free PVC backing. (Coral Classic tiles also available with bitumen backing. Please visit www.forbo-flooring.co.uk/Coral for more details.)

Coral Classic tile

13 colours Total thickness: approx. 9 mm Total weight: approx. 4700 gram/m² Size: 50 x 50 cm

Coral Brush tile

18 colours Total thickness: approx. 9 mm Total weight: approx. 4700 gram/m² Size: 50 x 50 cm





nuway®

The recognised market leader in engineered entrance flooring systems, Nuway offers a wide range of rigid single and double sided made-to-order mats which provide an outstanding first line of defence against soil and moisture entering a building on the soles of shoes and the treads of wheeled traffic.

Double Sided Systems

- Nuway Tuftiguard Our best-selling range with long term, dirt removal for intense traffic locations and now available with Bamboo and Black Anodised Aluminium variants.
- Nuway Tuftiguard HD Removes soil in intense traffic areas, under the highest loads.

Single Sided Systems

- Nuway Connect Versatile roll up system with a wide choice of inserts, including Coral and bristle. Suitable for shaping on site and very heavy traffic areas.
- Nuway Grid Tough, economical and aesthetically versatile entrance flooring.
 Available in a wide choice of inserts including Coral Classic and Coral Brush.

Choice of construction

Most Nuway products are available in a choice of heights and in open or closed construction to meet the requirements of a wide range of entrances.

Integrated Entrance Solutions

By using Forbo Coral as the insert material in our single sided Nuway products, it's possible to design a Nuway rigid entrance system where the Coral textile clean-off area matches beautifully.

For more information on Nuway entrance systems, please visit www.forbo-flooring.co.uk/nuway



Forbo's Nuway collection offers value for money alternatives in entrance systems where the level of traffic is very heavy and where aesthetics are key.



Coral technical specifications

			Coral W (32:	/elcome xx)*	Coral (57:		Coral (
	Total thickness	ISO 1765	Approx	c. 9 mm	Approx	c. 9 mm	Approx	. 9 mm	
	Wear classification	EN 1307	33, comme	ercial heavy	33, comme	rcial heavy	33, comme	rcial heavy	
	Colours		8	8	1	8	1	3	
[~Q	Available widths		Rolls	Mats	Rolls	Mats	Rolls	Mats	
× .	(all widths are approx.) Roll widths include 2.5 cm		205 cm	105 x 155 cm	105 cm	55 x 90 cm	105 cm	55 x 90 cm	
	edge each side				155 cm	90 x 155 cm	155 cm	90 x 155 cm	
	Mat widths include 2.5 cm edge all sides		Roll lengths approx. 27.5 m		205 cm Roll lengths approx. 27.5 m	135 x 205 cm 205 x 300 cm	205 cm Roll lengths approx. 27.5 m	135 x 205 cm 205 x 300 cm	
	Tile sizes			-		-		-	
	Colour fastness ratings:								
	Light	EN ISO 105/B02	7		>5		7-8		
	Rubbing	EN ISO 105/X12		5	5	5	4	-5	
	Water	EN ISO 105/E01	4	-5	4-	-5	4	-5	
	Seawater	EN ISO 105/E02	4	-5	4	-5	4	-5	
	Waterstains	EN 1307 annex G	!	5	<u>.</u>	5	4	-5	
	Shampoo	BS 1006	4-5		4-5		4-5		
	Organic solvents	EN ISO 105/X05	4	-5	4-	-5	4	-5	
	Manufacturing method/type		Tufted, 5/3	32" cut-pile	Tufted, 5/3	32" cut-pile	Tufted, 5/3	32" cut-pile	
	Designs		Multi-colo	ured linear	Plain designed/	coloured blend	Multi coloured de	esigned/coloured	
	Pile material		100% regenerate	ed Econyl® Nylon	100% regenerate	ed Econyl® Nylon	100% polyamide-	BCF solution dyed	
	Tuft base		100% recycled non-	-woven PET/Econyl®	Non-wove	n polyester	Non-wove	n polyester	
	Backing (phthalate free vinyl)		EVERFO	PRT vinyl	EVERFO	RT vinyl	EVERFO	RT vinyl	
	Total weight	ISO 8543	Approx. 39	50 gram/m²	Approx. 40	50 gram/m²	Approx. 40	00 gram/m²	
_	Pile installation weight	ISO 8543	Approx. 75	60 gram/m²	Approx. 92	0 gram/m²	Approx. 87	0 gram/m²	
	Pile thickness	ISO 1766	Approx.	. 6.3 mm	Approx	c. 7 mm	Approx	7 mm	
	Pile density	ISO 8543	0.111 gı	ram/cm³	0.105 gr	ram/cm³	0.100 gı	ram/cm³	
	Number of tufts	ISO 1763	Approx 7	79300/m ²	Approx. 5	58000/m ²	Approx. 6	51500/m ²	
	Comfort class	EN 1307	LC	C3	LC	[3	LC		
*	Creating Better Environments								
\prec	Renewable Electricity		All Coral products a	are manufactured using	100% electricity made	by renewable sources			
O	Recycled content		23	3%	23	1%	0-22	%**	
	AgBB/DiBt		Pa	nss	Pa	iss	Pa	SS	
	Guarantee				y contact conditions pri		fessionally fitted by a re	ecognised contractor	
	Installation method	EN 1307	Coral sheet produc	t should always be full	adhered.				
	All Coral products meet th	e requirements of	EN 14041. Note: the	requirements of EN	I 14041 do not apply	to loose laid mats	and rugs.	C € EN 1404	
Rm21	Fire behaviour	EN 13501-1	B _f	-s1	B _{fl}	-s1	B _f	-s1	
	Slip resistance	EN 13893	С	OS .	D	S	С	S	

* Also available with fire retardant backing	. ** Depending on colour. Visit www.forbo-flooring.co.uk/coral for more details.
--	--

ISO 6356

< 2 kV


< 2 kV

< 2 kV

		Coral Duo (97xx)*			Coral Brush Tile (T57xx)*	Coral Classic Tile (T47xx)*	
×	Total thickness	ISO 1765	Approx. 9 mm		Approx. 9 mm	Approx. 9 mm	
	Wear classification	EN 1307	33, commercial heavy		33, commercial heavy	33, commercial heavy	
	Colours		8		18	13	
	Available widths (all widths are approx.)		Rolls	Mats			
	Roll widths include 2.5 cm edge each side		205 cm	No mats			
	Mat widths include 2.5 cm edge all sides		Roll lengths approx. 27.5 m				
	Tile sizes		Koli lengths ap	oprox. 27.5 m	Size: 50 x 50 cm (12 tiles in a box = 3 m ²)	Size: 50 x 50 cm (12 tiles in a box = 3 m ²)	
	Colour fastness ratings:				(12 thes in a sex 5 iii)	(12 dies in a sox 5 iii)	
2	Light	EN ISO 105/B02	>:	5	>5	7-8	
	Rubbing	EN ISO 105/X12	4-5		5	4-5	
	Water	EN ISO 105/E01	4-5		4-5	4-5	
	Seawater	EN ISO 105/E02	5		4-5	4-5	
	Waterstains	EN 1307 annex G	5		5	4-5	
	Shampoo	BS 1006	4-5		4-5	4-5	
	Organic solvents	EN ISO 105/X05	4-5		4-5	4-5	
	Manufacturing method/type		Tufted, 5/32" cut-pile		Tufted, 5/32" cut-pile	Tufted, 5/32" cut-pile	
	Designs		Ribb	ped	Plain designed/ coloured blend	Multi coloured designed/coloured	
	Pile material		100% polyamide-BCF, where 75% is regenerated Econyl® Nylon		100% regenerated Econyl® Nylon	100% polyamide-BCF solution dyed	
	Tuft base		Non-woven polyester		Non-woven polyester	Non-woven polyester	
	Backing (phthalate free vinyl)		EVERFORT vinyl		EVERFORT vinyl	EVERFORT vinyl***	
SC.	Total weight	ISO 8543	Approx. 3800 gram/m ²		Approx. 4700 gram/m²	Approx. 4700 gram/m²	
	Pile installation weight	ISO 8543	Approx. 670 gram/m ²		Approx. 920 gram/m²	Approx. 870 gram/m ²	
$\stackrel{\times}{=}$	Pile thickness	ISO 1766	Approx. 6 mm		Approx. 7 mm	Approx. 7 mm	
	Pile density	ISO 8543	0.095 gram/cm³		0.105 gram/cm³	0.100 gram/cm ³	
	Number of tufts	ISO 1763	Approx. 32000/m²		Approx. 58000/m ²	Approx. 61500/m ²	
	Comfort class	EN 1307	LC2		LC3	LC3	
⇒	Creating Better Environments						
K	Renewable Electricity		All Coral products ar	e manufactured using	100% electricity made by renewable sources.		
3	Recycled content		14%		20%	0-22%**	
	AgBB/DiBt		Pass		Pass	Pass	
	Guarantee		Coral is guaranteed for 5 years under heavy contact conditions provided it has been professionally fitted by a recognised contrac regularly maintained in accordance with the Forbo requirements currently in force.				
	Installation method	EN 1307			Monolithic or Tessellated	Monolithic or Tessellated	
	All Coral products meet the requirements of EN 14041. Note: the requirements of EN 14041 do not apply to loose laid mats and rugs.						
ð.	Fire behaviour	EN 13501-1	B _n -	s1	B _n -s1	B _n -s1	
S)	Slip resistance	EN 13893	D:		DS	DS	
			< 2 kV		I .		

^{***} Coral Classic tiles also available with bitumen backing. Please visit www.forbo-flooring.co.uk/Coral for more details.

Personal charging

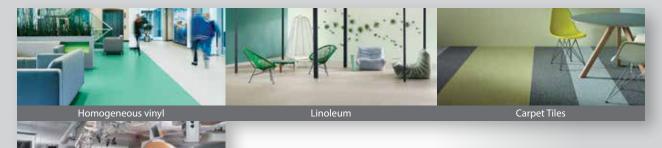

More Forbo Flooring

Why deal with multiple suppliers when you can deal with one? Forbo Flooring Systems is a global producer of commercial flooring solutions.

- · Environmentally friendly, functional and design-oriented linoleum.
- High performing static control flooring for areas with sensitive electronic equipment.
- · High quality European manufactured Luxury Vinyl Tiles.
- · Carpet tiles for both public and commercial environments.
- and resilient floor coverings.
- Entrance flooring systems that keep interior floors clean, dry and safe.

Please visit our website **www.forbo-flooring.co.uk** to see our extensive range of flooring products.

If you would like further information on any of the products shown in this brochure, or would like to discuss an entrance flooring project with our experienced advisers, please call our dedicated entrance flooring team on 01773 740 688, email efs.flooring.uk@forbo.com or visit www.forbo-flooring.co.uk/efs

WHAT TO DO NEXT



Samples can also be ordered by calling 0800 731 2369 or email samples.uk@forbo.com



If you are at the stage where you would like to discuss your project with an experienced contractor specially trained in every aspect Forbo Entrance Systems Specialist Installer of Nuway specification and installation, we would be delighted to put you in touch with an approved FESSI (Forbo Entrance System Specialist Installer) contractor who will be able to visit your site and provide further advice and a detailed quotation.

London EC1 Showroom: 79 St John Street,

Mon - Fri 9.00 am - 4.00 pm Forbo's EC1 showroom is the ideal place to visit when you're looking for that

'perfect colour' or just want to see a

Our full portfolio of brands on display includes Tessera and Westbond carpet

tiles, Marmoleum, project vinyl ranges, entrance flooring systems and designs

wider range of products.

from our Flotex collection.

one of our advisors.

Why not pop in and enjoy some hospitality while looking at the

products or discussing a project with

London, EC1M 4NR Tel: 0207 553 9300

Opening hours:

Please call us on 01773 740 688 for more information.



All available BIM objects for our Nuway and Coral entrance flooring systems can be downloaded directly from www.bimstore.co.uk

Our flooring solutions offer includes:

- An extensive range of sheet project vinyl, acoustic vinyl and safety vinyl.

- Flocked sheet and tiles for areas that need the benefits of both textile
- Cushioned vinyl for the home environment in a wide range of designs.



Static control flooring

Luxury Vinyl Tiles

Acoustic vinyl

Forbo Flooring Systems is part of the Forbo Group, a global leader in flooring and movement systems, and offers a full range of flooring products for commercial and affordable housing and new build markets. High quality linoleum, vinyl, textile, flocked and entrance flooring products combine functionality, colour and design, offering total flooring solutions for any environment.



UK

Forbo Flooring UK Limited High Holborn Road Ripley Derbyshire DE5 3NT

London EC1 showroom

79 St John Street, Clerkenwell London EC1M 4NR Tel: 0207 553 9300

For commercial enquiries:

If calling from the North, Midlands, London & South East Tel: 0800 0282 162 Fax: 01772 646 912

If calling from Scotland & South West Tel: 0800 0935 258

Fax: 01592 643 999

Nuway enquiries:

Tel: 01773 740 688 Fax: 01773 740 640

Residential enquiries:

Tel: 0800 0935 846 Fax: 01592 643 999

Email: info.flooring.uk@forbo.com www.forbo-flooring.co.uk

Samples:

Tel: 0800 731 2369 email:

samples.uk@forbo.com

Ireland

Forbo Ireland Ltd 2 Deansgrange Business Park Blackrock Co Dublin

Tel: 00353 1 2898 898 Fax: 00353 1 2898 177 Email: info.ireland@forbo.com www.forbo-flooring.ie

Registered office:

Forbo Flooring UK Limited High Holborn Road Ripley Derbyshire DE5 3NT Registered in England 9200318













This programme expresses our ambition to design and manufacture floor coverings that benefit every individual by helping to provide safe, hygienic and comfortable living and working environments.





