

# Technical specifications

Layout & Outline meet the requirements of EN 1307

tessera® layout & outline

Description	Tufted low level loop pile carpet tile	
Tile size	EN ISO 24342:2018	50 cm x 50 cm
Total thickness	ISO 1765	6.1 mm
Pile height	ISO 1766	3.1 mm
Collection size	Layout 34 - Outline 7	
Packaging per carton tiles	20 (5 m <sup>2</sup> )	
Commercial use	EN ISO 10874	Class 33
Pile composition	100% polyamide 6	
Dye method	100% solution dyed	
Stitch density	ISO 1763	193,060 per m <sup>2</sup>
Pile weight	ISO 8543	580 g/m <sup>2</sup>
Total weight	ISO 8543	3895 g/m <sup>2</sup>
Primary backing	Polyester	
Secondary backing	ProBac™ recycled mineral filler with low amount of modified bitumen and polyester fleece	
Alternative available secondary backing	SOFTbac®	
Acoustical impact noise reduction	ISO 10140-3	26 dB
Acoustical sound absorption	ISO 354	α <sub>w</sub> = 0.20 (H)
Castor chair continuous use	ISO 4918	r ≥ 2.4
Colour fastness to light	EN ISO 105-B02	≥ 6
Dimensional stability	EN 986	≤ 0.2 %
Indoor air emissions: TVOC after 28 days	EN 16516	≤ 0.1 mg/m <sup>3</sup>
Creating Better Environments		
Renewable Energy	All Tessera carpet tiles are manufactured using 100% renewable energy (electricity & biogas)	
Recycled Content	Inline carpet tiles contain 61% recycled content by weight	
Indoor air quality	Layout & Outline carpet tiles comply to Indoor Air Comfort Gold 8.0 (2022)	
Ska Rating	Layout & Outline meets Ska Rating criteria for M12 soft floor coverings in office, retail and higher education schemes	
Prodis-GUT	www.pro-dis.info	2C31F4FE
Back to the Floor	Installation off cuts can be collected via Back to the Floor	
Installation method	Layout: Monolithic, brick, tessellated, quarter turn & quarter brick Outline: Brick, tessellated, quarter turn & quarter brick	



Layout & Outline carpet tiles meet the requirements of EN 14041:2004 and BS EN 14041:2004

Product code	EN 14041	1170100-DOP-109
Product code	BS EN 14041	1170100-DoP-GB109
Reaction to fire	EN 13501-1	B <sub>f1</sub> -s1, G, NCS
Slip resistance	EN 13893	μ ≥ 0.30
Body voltage	ISO 6356	≤ 2.0 kV
Thermal conductivity	EN 12524	0.06 W/mK

All Forbo Flooring Systems' sales organisations and manufacturing sites worldwide have certified Quality Management Systems in accordance with ISO 9001. All Forbo Flooring Systems' manufacturing plants have certified Environmental Management Systems in accordance with ISO 14001. Tessera carpet tiles and planks are manufactured in a facility certified to SA8000® and ISO 45001. The Life Cycle Assessment (LCA) of Forbo Flooring Systems' products is documented in individual Environmental Product Declarations (EPD's).




**Registered office:**  
Forbo Flooring UK Limited  
High Holborn Road  
Ripley, Derbyshire DE5 3NT  
website: [www.forbo-flooring.co.uk](http://www.forbo-flooring.co.uk)  
Registered in England: 9200318

**Samples:**  
Tel: 0800 731 2369  
email: [samples.uk@forbo.com](mailto:samples.uk@forbo.com)

## CONSTRUCTION



## SUSTAINABILITY



## APPLICATION




## INDOOR AIR QUALITY




## SOCIAL ACCOUNTABILITY



## ACOUSTICS



## COLLECTION AVAILABILITY & INSTALLATION

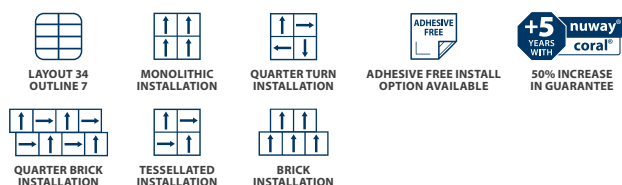

Whilst Forbo Flooring UK Limited does its best to ensure that the contents of this samplebook are correct and accurate at the time of publication, to the fullest extent permitted by law, Forbo Flooring UK Limited makes no, and expressly disclaims all, guarantees of any kind, expressed or implied in respect of the information, content, materials or products displayed in this samplebook and does not represent that the information is accurate, complete or current and you are advised to visit our website at [www.forbo-flooring.co.uk](http://www.forbo-flooring.co.uk) for up-to-date details or corrections to such contents.

creating better environments



FLOORING SYSTEMS