

Product quick info

**FLT U30 GL/NP-NA-HACCP BL
FDA**

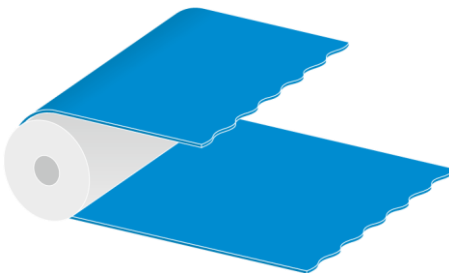
Sketch of cross-section (not actual size)

Applications

- Dough conveying
- Meat processing
- Poultry conveying
- Seafood processing
- Fruit & vegetable processing

Properties/Advantages

- Top face: reduced product contact area and improved product release
- Driving face: optimal friction to the drive drum and low dirt adhesion
- HACCP design
- Non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to EU, FDA 21 CFR and MHLW (No. 370)
- Laterally flexible and troughable

**Basic technical data**

Top face	Polyurethane, NP
Underside	Polyurethane, GL
Article no.	640014
d _{min} [mm]	40
Total thickness [mm]	3.4
k _{1%} relaxed [N/mm width]	1.75
Weight [kg/m ²]	3.65
Permitted operating temperature [°C]	-10 to +70

Product Quick Info | EN | 11.2024
FMS · Reproduction of text or parts thereof only
with our approval. Modifications reserved.

Forbo Siegling GmbH
Lilienthalstrasse 6/8, D-30179 Hannover
Phone +49 511 67 04 0
www.forbo-siegling.com, siegling@forbo.com