

PQI

Product
quick info

siegling belting

NEW





Belt scraper white (Dual durometer design)

Applications

- Food industry
- Remove product residues
- Cleaning of the belt surface

Properties/Advantages

- Unique dual durometer design:
 - =>rigid scraper body/no additional support needed
 - =>soft scraper lip/excellent cleaning result also in combination with soft surfaces, preventing material from re-entering the system
- Highly wear resistant
- Minimal stress on the belt joint
- Longer life of belt and splice
- Compliant to FDA and EU regulations

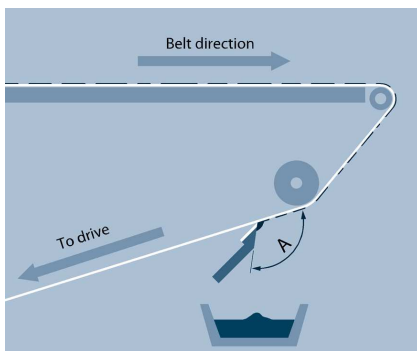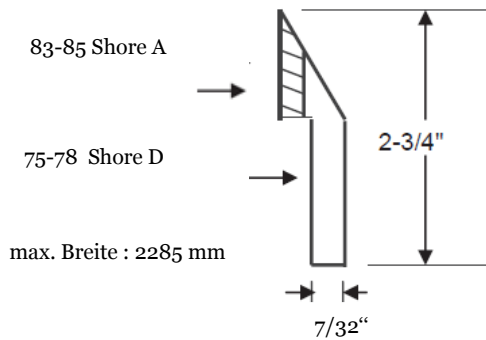

Scraper should lightly touch the belt on the return side just after product has been discharged. The angle "A" normally will be between 100 and 120 degrees.

Basic technical data

Article no.	882156
Material	urethane
Hardness scraper body [Shore D]	75-78
Hardness scraper lip [Shore A]	83-85
Colour	white
Max. width [mm]	2285
Food grade	FDA, EU
Max. temperature [°C]	83

Product Quick Info 882156-2 - 04/18
FMS - Reproduction of text or parts thereof only
with our approval.
Modifications reserved.

Forbo Siegling GmbH
Lilienthalstraße 6/8, D-30179 Hannover
Telefon +49 511 67 04 0, Fax +49 511 67 04 305
www.forbo-siegling.com, siegling@forbo.com

Siegling – total belting solutions



MOVEMENT SYSTEMS