



Linoleum Sheet

marmoleum® linear striato



creating better environments



marmoleum® linear

Creating comfortable spaces

Marmoleum Linear is designed to create a contemporary, comfortable environment with a warm and welcoming feel for informal, natural settings with a homely atmosphere.

A setting where we will recover faster, feel encouraged to work, share ideas, and to learn.

With an intuitive reference to nature, the Linear collection allows you to create various atmospheres within a space, adjusting to changing needs. The neutral, rich colours have the ability to easily adapt and come to life when combined with each other and other materials. With Linear, the floor can act as a canvas offering endless possibilities.

Creating comfortable spaces

Feeling at home anywhere

With this new Linear collection, we offer a relevant, functional and desirable range that allows you to create comfortable spaces with a natural touch where you truly feel at home.

The directional Linear pattern can be used to create a floor that guides people from one space to another, and to indicate an area within a larger space.

COMFORTABLE BY NATURE

- The sustainable flooring solution: CO₂ neutral (from cradle to gate) and PVC free
- Created from natural raw materials such as linseed oil and wood flour
- Made to contribute to a healthy indoor environment

COMFORTABLE BY DESIGN

- A collection with timeless, neutral colours, which come to life when combined with each other and other materials
- A directional pattern that supports guiding and zoning
- Adaptive, supportive, easy to read and easy to work with

COMFORTABLE IN USE

- A homogeneous product built to last
- A visual with soil hiding properties
- Easy to clean and maintain









marmoleum® striato



5252 | ivory shades

LRV 52%
NCS S 2005-Y10R




5253 | bleached gold

LRV 42%
NCS S 3010-Y20R



5225 | compressed time

LRV 34%
NCS S 4010-Y30R

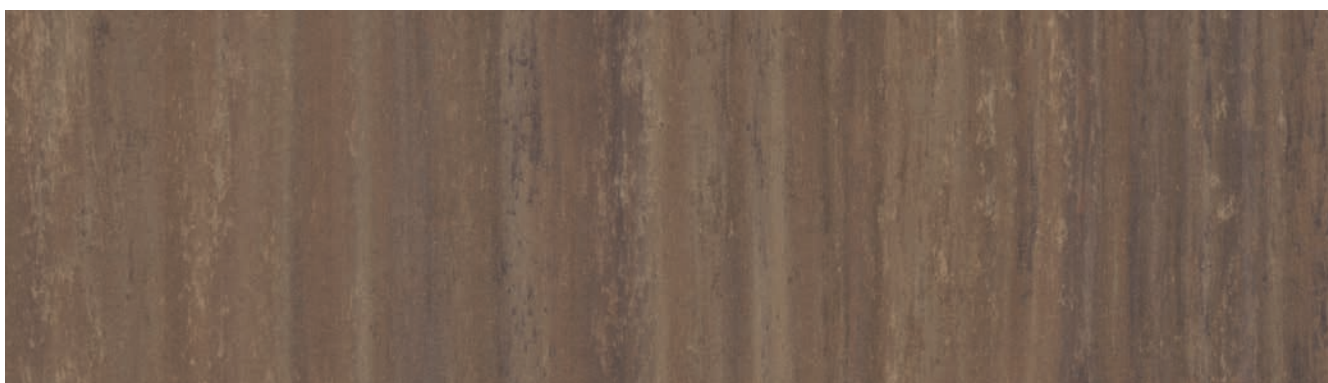

5254 | red horse


LRV 18%
NCS S 6010-Y50R

marmoleum® striato




5255 | desert sand

LRV 48%
NCS S 2010-Y20R

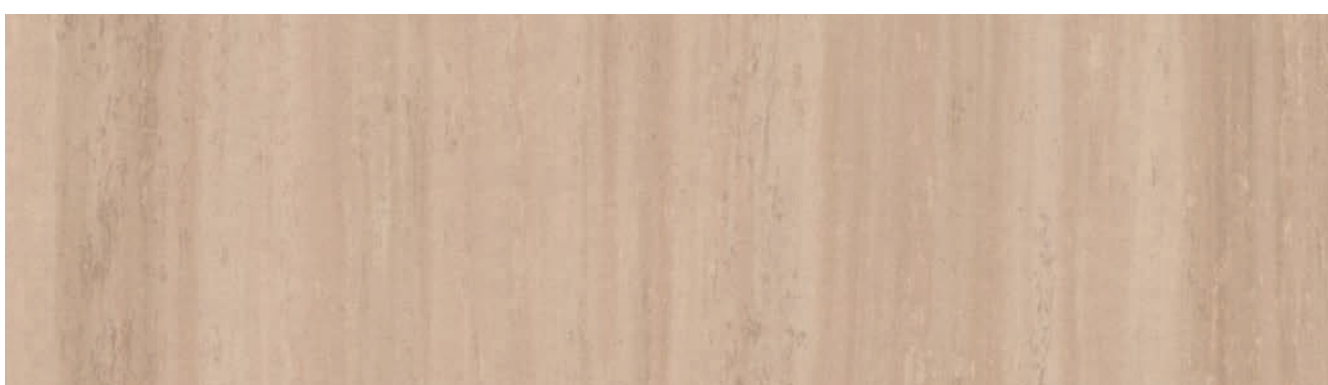


5256 | silt stone

LRV 44%
NCS S 3010-Y30R

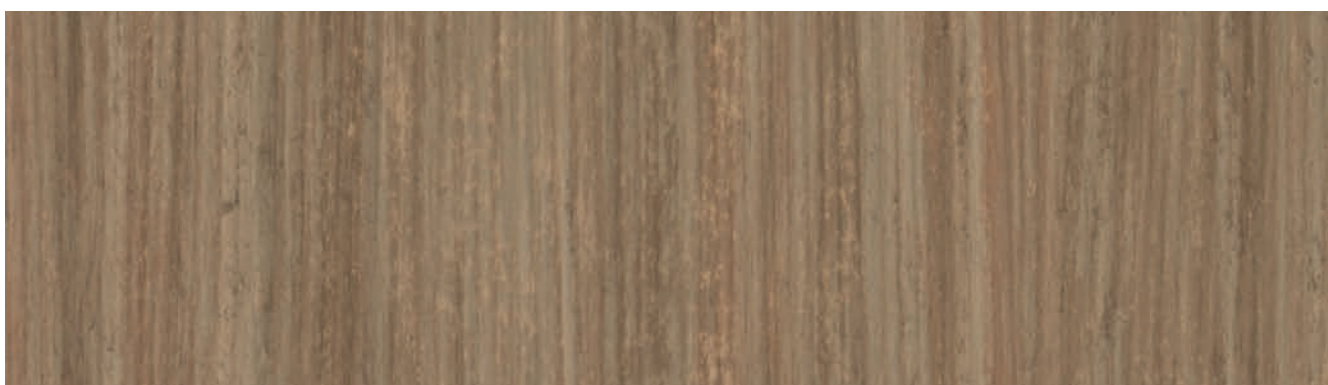

5217 | withered prairie

LRV 25%
NCS S 5010-Y30R

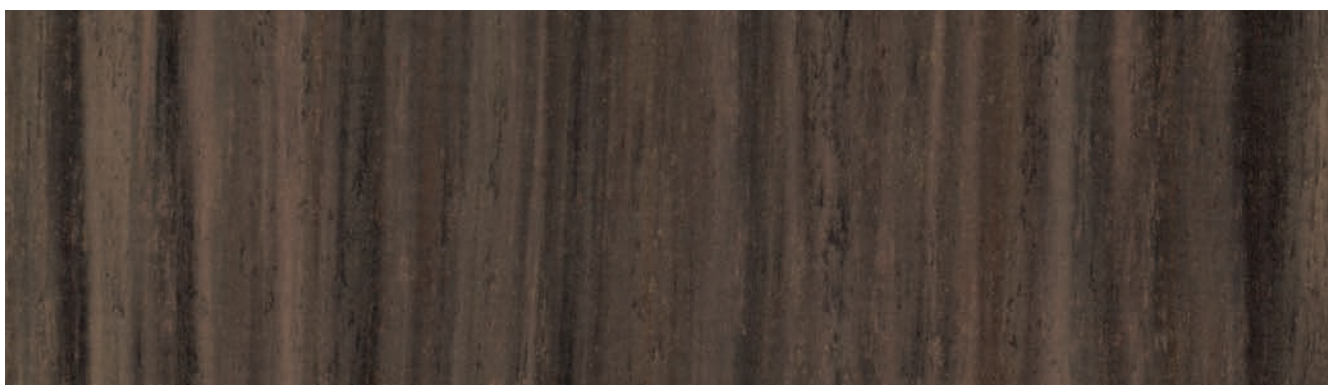

5218 | Welsh moor

LRV 8%
NCS S 8005-Y80R






marmoleum® striato




5248 | urban silver

LRV 41%
NCS S 3005-Y20R

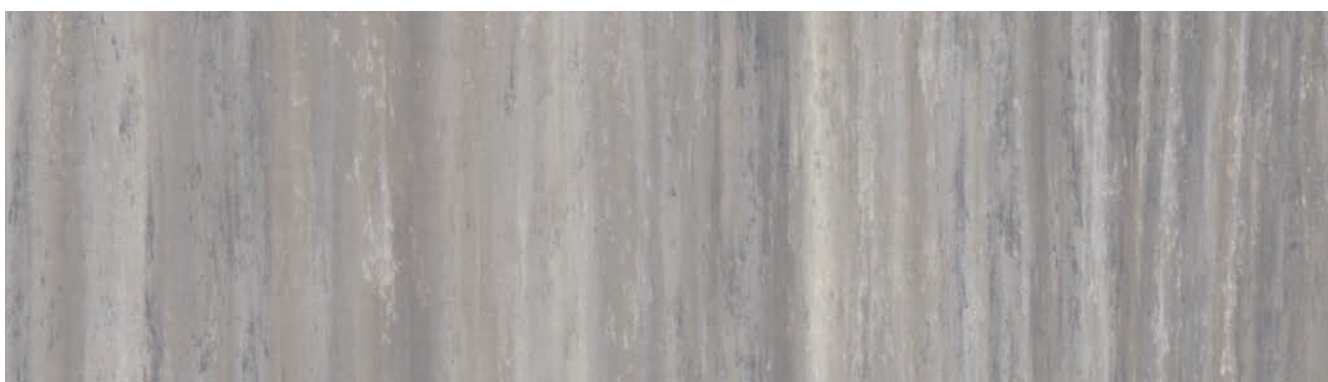


5249 | Stonehenge

LRV 33%
NCS S 3502-Y

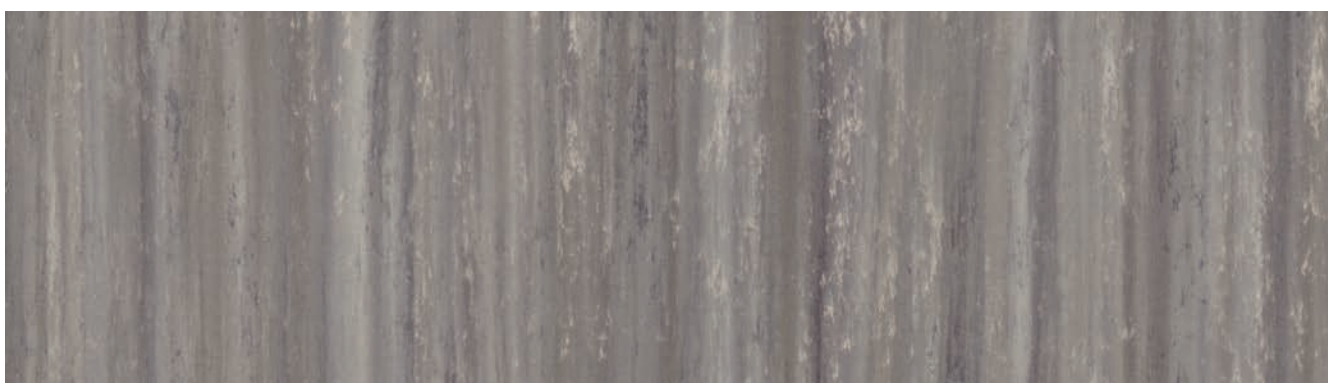

5250 | blue basalt

LRV 27%
NCS S 5005-Y20R

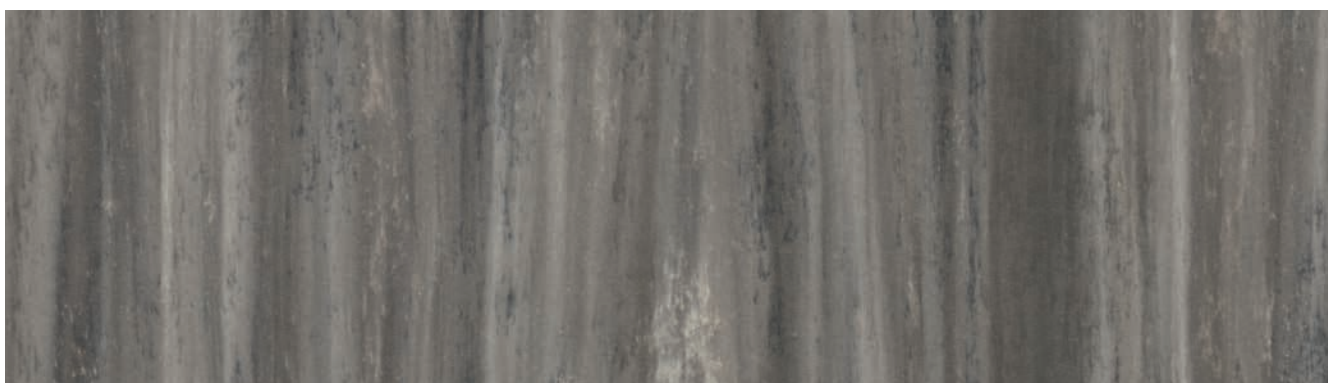

5251 | black glacier

LRV 19%
NCS S 5502-Y



marmoleum® striato




5257 | sandy chalk

LRV 61%
NCS S 1505-Y




5232 | rocky ice

LRV 47%
NCS S 2005-Y20R

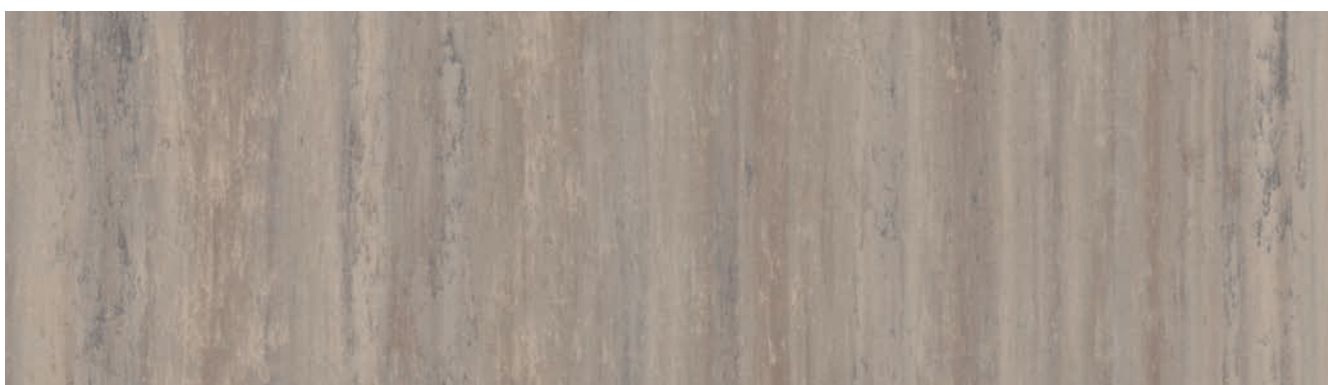

3573 | trace of nature

LRV 28%
NCS S 4005-Y20R

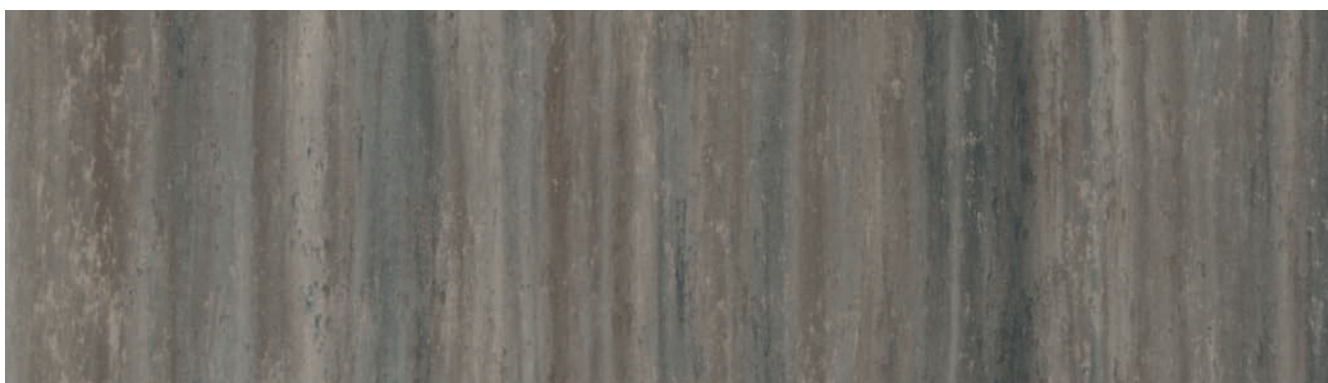

5231 | Cliffs of Moher

LRV 18%
NCS S 6005-Y20R





Technical specifications



Marmoleum Striato meets the requirements of EN ISO 24011
Marmoleum Striato Decibel meets the requirements of EN 686

		Marmoleum Striato	Marmoleum Striato Decibel	
	Total thickness	EN ISO 24346	2.5 mm	3.5 mm
	Surface finish		TopShield ²	TopShield ²
	Collection size		16	On request
	Domestic use	EN ISO 10874	Class 23	Class 23
	Commercial use	EN ISO 10874	Class 34	Class 33
	Light industrial use	EN ISO 10874	Class 43	Class 41
	Roll width	EN ISO 24341	2.0 m	1.95 m / 2.0 m
	Roll length	EN ISO 24341	≤ 33 m	≤ 33 m
	Total weight	EN ISO 23997	2900 g/m ²	3100 g/m ²
	Slip resistance (ramp test)	DIN 51130	R9	R9
	Castor chair continuous use	ISO 4918	Pass	Pass
	Residual indentation <i>Typical value</i>	EN ISO 24343-1	≤ 0.15 mm ~ 0.08 mm	≤ 0.30mm ~ 0.20mm
	Colour fastness to light	EN ISO 105-B02 method 3	≥ 6	≥ 6
	Indoor air emissions: TVOC after 28 days	EN 16516	≤ 0,05 mg/m ³	≤ 0,05 mg/m ³
	Bacteriostatic properties*		Marmoleum has natural bacteriostatic properties which are confirmed by independent laboratories, even against the bacteria MRSA.	
	Resistance to chemicals	EN ISO 26987	Resistant to diluted acids, oils, fats and to the conventional solvents. Not resistant to prolonged exposure to alkalis.	
	Cigarette resistance	EN 1399	There is no melting of the surface by cigarettes. Marks left on Marmoleum as a result of stubbed-out cigarettes can be removed.	
	Flexibility	EN-ISO 24344	ø 40 mm	ø 40 mm
	Acoustical impact noise reduction	EN ISO 717-2	-	18 dB
	Creating better environments			
	Life Cycle Assessment		LCA is the foundation for securing the lowest environmental impact.	
	CO ₂ neutral		Marmoleum is produced CO ₂ neutral (cradle to gate).**	
	Renewable electricity		Marmoleum is manufactured using 100% electricity from renewable sources.	
			Marmoleum and Marmoleum Decibel are made of 94-98% natural materials.	
	Natural materials (e.g. linseed oil, jute, tree resin, wood flour, limestone)		Marmoleum contains PEFC certified wood floor.	
			Marmoleum and Marmoleum Decibel are free of PVC, PET, synthetic rubber and plasticizers.	
			Marmoleum is REACH compliant.	
	Recycled content		Marmoleum contains recycled content.	
	Application for underfloor heating		yes	

Marmoleum meets the requirements of EN 14041:2004

		0100201-DoP-306	0100207-DoP-306	
	Reaction to fire	EN 13501-1	Cfl-s1,G,CS	Cfl-s1,G,CS
	Slip resistance	EN 13893	μ ≥ 0.30	μ ≥ 0.30
	Thermal conductivity	EN 12524	0.17 W/mK	0.17 W/mK
	Body voltage	EN 1815	≤ 2.0 kV	≤ 2.0 kV

* Marmoleum sheet can be installed nett fit, or with a welding rod in the seam. Both are proven hygienic solutions.

** For verification and details please consult our Marmoleum EPD.



All Forbo Flooring Systems' sales organisations worldwide have a certified Quality Management System in accordance with ISO 9001.
All Forbo Flooring Systems' manufacturing operations have a certified Environmental Management System in accordance with ISO 14001.
The Life Cycle Assessment (LCA) of Forbo Flooring Systems' products is documented in individual Environmental Product Declarations (EPDs) which can be found on all of our websites.

Belgium

Forbo Flooring
't Hofveld 4B 001
1702 Groot-Bijgaarden
T: +32 2 464 10 10
F: +32 2 464 10 11
info.belgium@forbo.com
www.forbo-flooring.be

Czech & Slovak Republic

Forbo s.r.o.
Novodvorská 994
142 21 Praha 4
Česká republika
T: + 420 239 043 011
F: + 420 239 043 012
info.cz@forbo.com
www.forbo-flooring.cz

Sweden

Forbo Flooring AB
Box 9046, 400 91 Göteborg
T: 031-89 20 00
Stockholm tel: 08-602 34 90
Kundservice tel: 031-89 20 90
info.sweden@forbo.com
www.forbo-flooring.se

Other countries

Forbo Flooring B.V.
P.O. Box 13
1560 AA Krommenie
The Netherlands
T: +31 75 647 74 77
question@forbo.com
www.forbo-flooring.com

Find us on



creating better environments



FLOORING SYSTEMS