



055211 | Tango coconut cappuccino


Flocked Carpet Flooring

flotex[®] harmony



10" x 40" approx.
(25 cm x 100 cm)

Planks: Ballet, Lindy



40" x 40" approx.
(100 cm x 100 cm)

Tiles: Paso, Tango, Salsa

creating better environments



FLOORING SYSTEMS



The **only flooring solution** that addresses all your Senior Living needs.

Flotex Harmony is a collection of coordinated colors and patterns specifically designed to meet the unique flooring needs of senior living environments, making it fun and easy to create beautiful, inviting interior spaces for your community. The subtly textured Ballet and Lindy designs provide Harmony's foundation, pairing neutral earth tones with shades of sapphire, emerald, or garnet to form the collection's ten color families. These colors are then combined to form Paso, Salsa and Tango, a timeless trellis (ogee), an all-over floral and a modernized damask pattern, respectively, that work seamlessly together, making it easy to transition from one pattern to another without the need for transition strips. Mix and match patterns to create the look of an area rug, differentiate rooms, or transition from a living space to a hallway. The possibilities are endless.



flotex® harmony

In addition to long-lasting, beautiful aesthetics, Flotex Harmony is uniquely well-suited for senior living communities, providing a safe, hygienic, highly durable flooring solution with a proven performance history for over 40 years. Flotex Harmony features a surface of densely packed nylon 6,6 fibers that provide an indestructible, yet comfortable floor to walk on. It is highly stain and soil resistant and is 100% waterproof making it a truly washable textile floor that is easy to clean and will not retain odors. Flotex Harmony combines the cleanability and durability of a resilient floor with the comfort and acoustical properties of carpet. The end-result is a stylish, comfortable, hygienic floor that provides a safe homelike feel. Flotex Lindy and Ballet are available in a 10" x 40" plank. Paso, Tango and Salsa are available in 40" x 40" tiles.

CHECKLIST

- ✓ Hygienic
- ✓ Easy to clean
- ✓ Slip resistant
- ✓ No transition strips
- ✓ Durable
- ✓ Acoustical properties
- ✓ Affordable

flotex® harmony



055320 | Salsa Ocean Driftwood
055018 | Lindy Ocean



055320 | Salsa Ocean Driftwood
055119 | Ballet Driftwood



055420 | Paso Ocean Driftwood



055220 | Tango Ocean Driftwood



Paso
055420 | Ocean Driftwood
1 m x 1 m tiles



Tango
055220 | Ocean Driftwood
1 m x 1 m tiles



Salsa
055320 | Ocean Driftwood
1 m x 1 m tiles



Ballet
055119 | Driftwood
25 cm x 100 cm planks



Lindy
055018 | Ocean
25 cm x 100 cm planks



055018 | Lindy ocean
055420 | Paso ocean driftwood
055320 | Salsa ocean driftwood
055220 | Tango ocean driftwood

flotex® harmony



055302 | Salsa Aquamarine Oyster
055000 | Lindy Aquamarine



055302 | Salsa Aquamarine Oyster
055101 | Ballet Oyster



055402 | Paso Aquamarine Oyster



055202 | Tango Aquamarine Oyster



Paso
055402 | Aquamarine Oyster
1 m x 1 m tiles



Tango
055202 | Aquamarine Oyster
1 m x 1 m tiles



Salsa
055302 | Aquamarine Oyster
1 m x 1 m tiles



Ballet
055101 | Oyster
25 cm x 100 cm planks



Lindy
055000 | Aquamarine
25 cm x 100 cm planks



055202 | Tango aquamarine oyster

flotex® harmony



055305 | Salsa Caramel Cabernet
055003 | Lindy Caramel



055305 | Salsa Caramel Cabernet
055104 | Ballet Cabernet



055405 | Paso Caramel Cabernet



055205 | Tango Caramel Cabernet



Paso
055405 | Caramel Cabernet
1 m x 1 m tiles



Tango
055205 | Caramel Cabernet
1 m x 1 m tiles



Salsa
055305 | Caramel Cabernet
1 m x 1 m tiles



Ballet
055104 | Cabernet
25 cm x 100 cm planks



Lindy
055003 | Caramel
25 cm x 100 cm planks



055003 | Lindy caramel
055305 | Salsa caramel cabernet

flotex® harmony



055308 | Salsa Coastal Sapphire
055006 | Lindy Coastal



055308 | Salsa Coastal Sapphire
055107 | Ballet Sapphire



055408 | Paso Coastal Sapphire




055208 | Tango Coastal Sapphire



Paso
055408 | Coastal Sapphire
1 m x 1 m tiles



Tango
055208 | Coastal Sapphire
1 m x 1 m tiles

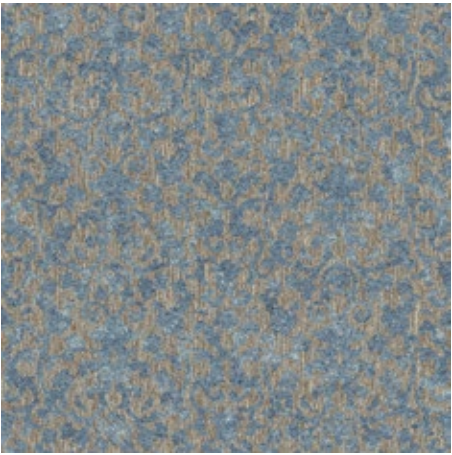

Salsa
055308 | Coastal Sapphire
1 m x 1 m tiles



Ballet
055107 | Sapphire
25 cm x 100 cm planks



Lindy
055006 | Coastal
25 cm x 100 cm planks



055107 | Ballet sapphire

flotex® harmony



055311 | Salsa Coconut Cappuccino
055009 | Lindy Coconut



055311 | Salsa Coconut Cappuccino
055110 | Ballet Cappuccino



055411 | Paso Coconut Cappuccino



055211 | Tango Coconut Cappuccino



Paso
055411 | Coconut Cappuccino
1 m x 1 m tiles



Tango
055211 | Coconut Cappuccino
1 m x 1 m tiles



Salsa
055311 | Coconut Cappuccino
1 m x 1 m tiles



Ballet
055110 | Cappuccino
25 cm x 100 cm planks



Lindy
055009 | Coconut
25 cm x 100 cm planks



055211 | Tango coconut cappuccino

flotex® harmony



055329 | Salsa Surf Emerald
055027 | Lindy Surf



055329 | Salsa Surf Emerald
055128 | Ballet Emerald



055429 | Paso Surf Emerald



055229 | Tango Surf Emerald



Paso
055429 | Surf Emerald
1 m x 1 m tiles



Tango
055229 | Surf Emerald
1 m x 1 m tiles



Salsa
055329 | Surf Emerald
1 m x 1 m tiles



Ballet
055128 | Emerald
25 cm x 100 cm planks



Lindy
055027 | Surf
25 cm x 100 cm planks



055027 | Lindy surf
055329 | Salsa surf emerald

flotex® harmony



055314 | Salsa Dunes Seaside
055012 | Lindy Dunes



055314 | Salsa Dunes Seaside
055103 | Ballet Seaside



055414 | Paso Dunes Seaside



055214 | Tango Dunes Seaside




Paso
055414 | Dunes Seaside
1 m x 1 m tiles



Tango
055214 | Dunes Seaside
1 m x 1 m tiles



Salsa
055314 | Dunes Seaside
1 m x 1 m tiles



Ballet
055113 | Seaside
25 cm x 100 cm planks



Lindy
055012 | Dunes
25 cm x 100 cm planks



055012 | Lindy dunes
055414 | Paso dunes seaside
055314 | Salsa dunes seaside
055214 | Tango dunes seaside

flotex® harmony



055323 | Salsa Pewter Coffee
055021 | Lindy Pewter



055323 | Salsa Pewter Coffee
055122 | Ballet Coffee



055423 | Paso Pewter Coffee



055223 | Tango Pewter Coffee



Paso
055423 | Pewter Coffee
1 m x 1 m tiles



Tango
055223 | Pewter Coffee
1 m x 1 m tiles



Salsa
055323 | Pewter Coffee
1 m x 1 m tiles



Ballet
055122 | Coffee
25 cm x 100 cm planks



Lindy
055021 | Pewter
25 cm x 100 cm planks



055223 | Tango pewter coffee

flotex® harmony



055326 | Salsa Sage Sand Dollar
055024 | Lindy Sage



055326 | Salsa Sage Sand Dollar
055125 | Ballet Sand Dollar



055426 | Paso Sage Sand Dollar



055226 | Tango Sage Sand Dollar



Paso
055426 | Sage Sand Dollar
1 m x 1 m tiles



Tango
055226 | Sage Sand Dollar
1 m x 1 m tiles



Salsa
055326 | Sage Sand Dollar
1 m x 1 m tiles



Ballet
055125 | Sand Dollar
25 cm x 100 cm planks



Lindy
055024 | Sage
25 cm x 100 cm planks



055024 | Lindy sage
055326 | Salsa sage sand dollar

flotex® harmony



055317 | Salsa Garnet Amber
055015 | Lindy Garnet



055317 | Salsa Garnet Amber
055116 | Ballet Amber



055417 | Paso Garnet Amber



055217 | Tango Garnet Amber




Paso
055417 | Garnet Amber
1 m x 1 m tiles



Tango
055217 | Garnet Amber
1 m x 1 m tiles



Salsa
055317 | Garnet Amber
1 m x 1 m tiles



Ballet
055116 | Amber
25 cm x 100 cm planks



Lindy
055015 | Garnet
25 cm x 100 cm planks



055317 | Salsa garnet amber

TECHNICAL SPECIFICATIONS

ENGLISH

APPLICATIONS

senior living, long-term care communities, physical therapy / occupational therapy, waiting rooms, offices, outpatient clinics, locker rooms, dining areas, health clubs, airports, classrooms, administrative areas, daycares, resorts, hospitality, casino, convention center, corridors, room turns, apartments, bistro, living rooms, main streets, etc.

PHYSICAL CHARACTERISTICS (TILE)

(dimensions are approximate)
Plank size 9.84" x 39.37" (25 cm x 100 cm) Ballet, Lindy
Tile size 39.37" x 39.37" (100 cm x 100 cm) Paso, Salsa and Tango
Gauge approx. 0.19" (5.0 mm)
Backing recycled vinyl cushioned backing
Packaging 10 planks (26.91 ft²/ 2.5 m²); Full meter tiles are palletized per order
Wear layer density approx. 46,000 fibers/in²

TECHNICAL DATA

Durability/Appearance Retention:

Wear layer composition nylon type 6,6
EN1307 (wear class) 4 (heavy duty)
Wira Abrasion test achieves > 60,000 cycles
EN 985 Castor Chair test suitable for continuous use under castors
ISO 3416-86 achieves 95% recovery in 24 hours/100% in one week

Fire Testing:

ASTM E 648/NFPA 253 (Critical Radiant Flux) Class 1
ASTM E 662/NFPA 258 (Smoke Density) 450 or less
ASTM D 2859 (Surface Flammability of Carpet & Rugs/
Pill Test) Pass
FSR - 195; SDC - 355 when tested in accordance to
CAN/ULC S102.2, Standard Test Method for Flame Spread
Rating and Smoke Development.

Sound Reduction:

ASTM E 492 IIC 59
Standard Test Method for Laboratory Measurement of
Impact Sound Transmission Through Floor/Ceiling
Assemblies using the Tapping Machine
ISO 354 Sound Absorption Noise Reduction
Coefficient = 0.10
17dB when tested in accordance with ISO 140-8

Slip Resistance:

Meets or exceeds the industry recommendation of >0.5
for flat surfaces when tested in accordance with ASTM
D 2047, Standard Test Method for Static Coefficient of
Friction.
Suitable for use on flat or inclined surfaces.

Electrical Properties:

ISO 6356 Static Propensity 0.1 Kv
ISO 10965 Vertical Resistance > 10⁹ ohms

LEED®: Flotex® contributes to LEED® credits, please visit
www.forboflooringNA.com for more information.

ESPAÑOL

APLICACIONES

asilos, comunidades de cuidado a largo plazo, fisioterapia / terapia ocupacional, salas de espera, oficinas, ambulatorios, vestidores, comedores, clubes de salud, aeropuertos, salones de clase, áreas administrativas, guarderías, pasillos, giros de habitaciones, apartamentos, bistró, salas de estar, calles principales, etc.

CARACTERÍSTICAS FÍSICAS (TEJA)

(las dimensiones son aproximadas)
Tamaño de la baldosa 9.84" x 39.37" (25 cm x 100 cm)
Tile size 39.37" x 39.37" (100 cm x 100 cm) Paso, Salsa and Tango
Espesor approx. 0.19" (5.0 mm)
Base base acolchada de vinilo reciclado
Contenido del cartón 10 baldosa (26.91 ft²/ 2.5m²); Las baldosas de metro completo se paletizan por pedido
Densidad de la capa de desgaste approx. 46,000 fibras/in²

DATOS TÉCNICOS

Durabilidad/apariencia de retención:

Composición de la capa de desgaste nylon tipo 6,6
EN1307 (clase de desgaste) 4 (trabajo pesado)
Wira Prueba a la abrasión resiste > 60,000 ciclos
EN 985 Prueba de la silla con ruedas adecuado para el uso continuo con ruedas
ISO 3416-86 logra 95% de recuperación en 24 hrs/100% en una semana

Prueba de Fuego:

ASTM E 648/NFPA 253 (Flujo Radiante Crítico) Clase 1
ASTM E 662/NFPA 258 (Densidad de Humo) 450 o menos
ASTM D 2859 Prueba de la Píldora Pasa
FSR - 195; SDC - 355 cuando se prueba de acuerdo con CAN / ULC S102.2, Método de prueba estándar para clasificación de propagación de llamas y desarrollo de humo.

Reducción de Sonido:

ASTM E 492 IIC 59
Método de prueba Estándar Laboratorio de medición de impacto A través de la transmisión de sonido
Piso/techo, utilizando la maquina de Tapp
ISO 354 Absorción de Sonido Coeficiente de reducción de ruido = 0.10
Teja: 17dB cuando es probado de acuerdo a la ISO 140-8

Resistencia a Derrape:

Cumple o excede la recomendación de la industria de > 0.5 para superficies planas cuando se prueba de acuerdo con ASTM D 2047, Método de prueba estándar para el coeficiente estático de fricción.
Adecuado para su uso en superficies planas o inclinadas.

Propiedades Eléctricas:

ISO 6356 Propensión de estática 0.1 Kv
ISO 10965 Resistencia Vertical > 10⁹ ohms

LEED®: Flotex® contribuye a créditos LEED®, por favor visite www.forboflooringNA.com para más información

FRANÇAIS

APPLICATIONS

centre pour personnes âgées, communautés de soins de longue durée, physiothérapie/ergothérapie, salle d'attente, bureau, Clinique médicale, vestiaires, salles à manger, centre sportif, aéroports, salle de classe, espace administratif, garderies, corridors, pièce hors d'accès pour nettoyage, appartements, bistro, salles de séjour, artères principales, etc.

CARACTÉRISTIQUES PHYSIQUES (CARREAU)

(les dimensions sont approximatives)
Dimensions 9.84" x 39.37" (25 cm x 100 cm) Ballet, Lindy
Dimensions 39.37" x 39.37" (100 cm x 100 cm) Paso, Salsa and Tango
Calibre 0.19" approx. (5.0 mm)
Base sous-couche recyclée
Contenu par carton 10 tuile (26.91 ft²/ 2.5m²); Les carreaux d'un mètre sont palettisés par commande
Densité de la couche d'usure approx. 46,000 fibres/in²

INFORMATIONS TECHNIQUES

Durabilité/rétention de l'apparence:

Composition de la surface d'usure nylon type 6,6
EN1307 (classe d'usure) 4 (trafic lourd)
Test d'abrasion Wira >60 000 cycles
EN985 résistance aux roulettes appropriés pour utilisation continue sous chaise à roulettes
ISO 3416-86 atteints 95 % de récupération en 24 h/100 % en une semaine

Résistance Feu/Fumée:

ASTM-E 648/NFPA 253
(Fluctuation radiance critique) Classe 1
ASTM E-662/NFPA 258
(densité de la fumée) 450 ou moins
ASTM D 2859 Test bouloche réussi
FSR-195; DDC-355 lorsqu'il est testé conformément aux normes CAN et ULC S102.2 – Méthode d'essai normalisée pour l'indice de propagation de la flamme et de la fumée.

Affaiblissement acoustique:

ASTM E 492 IIC 59
Méthode de test standard pour Transmission du son du plancher/plafond
ISO 354 Absorption du son coefficient de réduction du son = 0.10
17 dB éprouvé selon ISO 140-8

Résistance au glissement:

Rencontre ou excede les normes de l'industrie de > 0,5 pour les surfaces planes lorsque testées selon la norme ASTM D 2047, Méthode d'essai standard pour le coefficient de frottement statique.
Convient pour une utilisation sur des surfaces plates ou inclinées.

Propriété statique:

ISO 6356 Propension Statique 0.1 kv
ISO 10965 Résistance verticale > 10⁹ ohms

LEED®: Flotex® contribue à des crédits LEED®, s'il vous plaît visitez www.forboflooringNA.com pour plus d'informations.



Forbo Flooring Systems

visit us online: www.forboflooringNA.com | email: info.na@forbo.com

North American Headquarters: 8 Maplewood Drive, Humboldt Industrial Park, Hazleton, PA 18202 | ph: 1-800-842-7839 / 570-459-0771 | fax: 570-450-0258

Canadian Office: 3983 Nashua Drive, Unit 1, Mississauga, ON L4V 1P3 | ph: 1-800-268-8108 / 416-745-4200 | fax: 1-877-893-4680 / 416-745-4211

creating better environments

Item#224263 V1



FLOORING SYSTEMS