


siegling proposition

timing belts

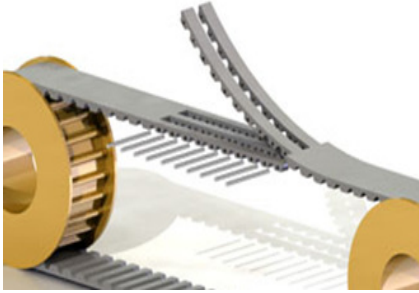

Pin join mechanical fastener

Properties/Advantages

- Much easier to fit
- No time-consuming dismantling of the machine
- No additional fitting tool required
- Minimum deflections like welded timing belts

Applications

- Easy conveying jobs where fast belt change is required and/or disassembling the timing belt would be too time consuming

Basic technical data

50% tensile strength of welded timing belt

T5 and AT5; minimum 700 mm, width 10 – 50 mm

T10 and AT10; minimum 1000 mm, width 25 – 100 mm

T20 and AT20; minimum 1000 mm, width 32 – 100 mm

181.2

FMS · Reproduction of text or parts thereof only with our approval.
Modifications reserved.

Forbo Siegling Nederland BV
Van Rensselaerweg 1
NL – 6956 AV Spankeren
Tel +31 313 491114, Fax +31 313 4922314
Email: oscar.rondeel@forbo.com