



# SERIES 4.1 | PROSNAP

Straight running belt | Pitch 14 mm (0.55 in)

siegling prolink  
modular belts



## S4.1-0 FLT PSP | ProSnap

Quick-Release for easy, quick and toolless opening and closing of the belt | One pin solution for entire belt width

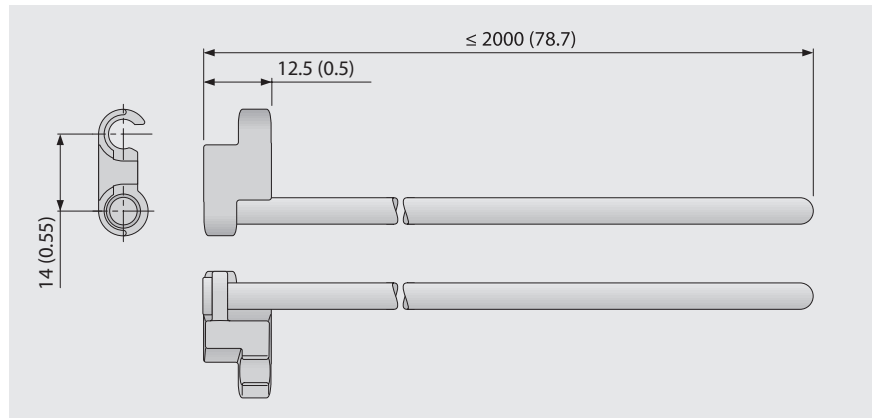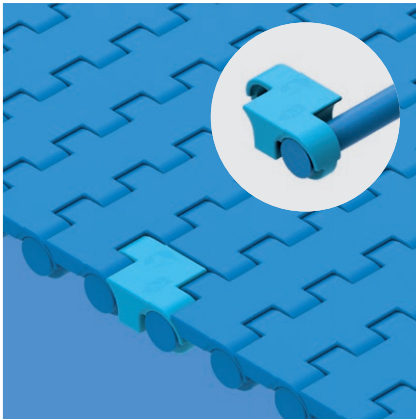

### Basic data

Module		Pin	
Material	Color	Material	Length [mm (in)]
POM	LB	PBT	≤ 2000 (79)
<b>Mold to order</b>			
POM-MD	BL	PBT	≤ 2000 (79)

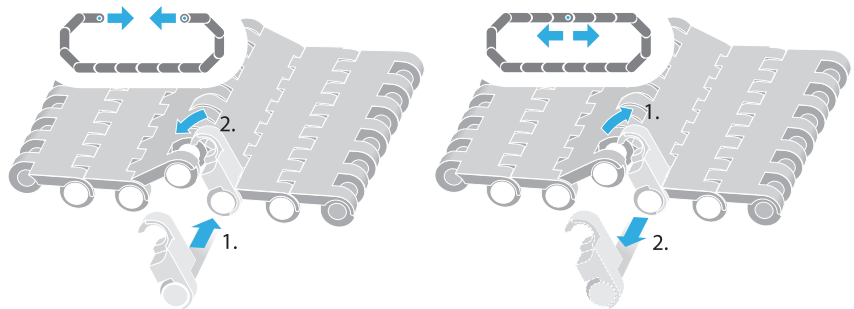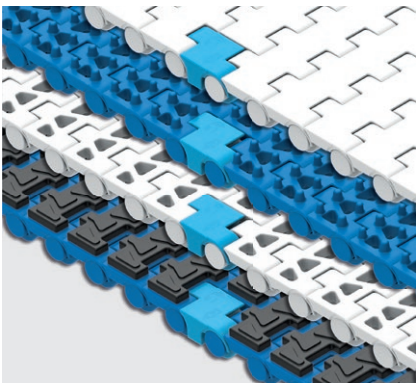

■ BL (Blue), ■ LB (Light blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".

All imperial dimensions (inches) are rounded off.

Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS