

Product quick info

**FLT U30 MT/GL-NA-HACCP BL
FDA**

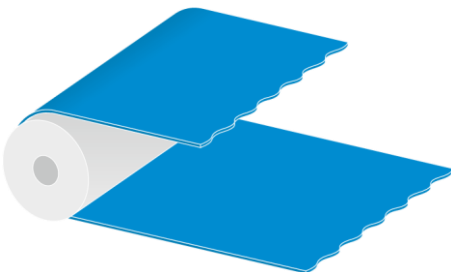

Sketch of cross-section (not actual size)

Applications

- Meat processing
- Poultry conveying
- Seafood processing
- Processing of dairy products
- Inclined transport and positioning food

Properties/Advantages

- Top face: optimal grip and good release for wet/moist products
- Driving face: very good cleanability and an easily scrapable surface
- HACCP design, very good cleanability
- Non antistatic
- Complies to the regulation for direct contact to foodstuffs accord. to EU, FDA 21 CFR and MHLW (No. 370)
- Laterally flexible and troughable

**Basic technical data**

Top face	Polyurethane, GL
Underside	Polyurethane, MT
Article no.	640015
d _{min} [mm]	40
Total thickness [mm]	3.0
k _{1%} relaxed [N/mm width]	1.75
Weight [kg/m ²]	3.65
Permitted operating temperature [°C]	-10 to +70

Product Quick Info | EN | 11.2024
FMS - Reproduction of text or parts thereof only
with our approval. Modifications reserved.

Forbo Siegling GmbH
Lilienthalstrasse 6/8, D-30179 Hannover
Phone +49 511 67 04 0
www.forbo-siegling.com, siegling@forbo.com