


SERIES 18 | CONE TOP

siegling prolink
modular belts

Side flexing and spiral belt | Pitch 25.4 mm (1 in)

S18-44 CTP


Open version (44%) base module for drainage with Cone Top (pointed studs) pattern for superior grip

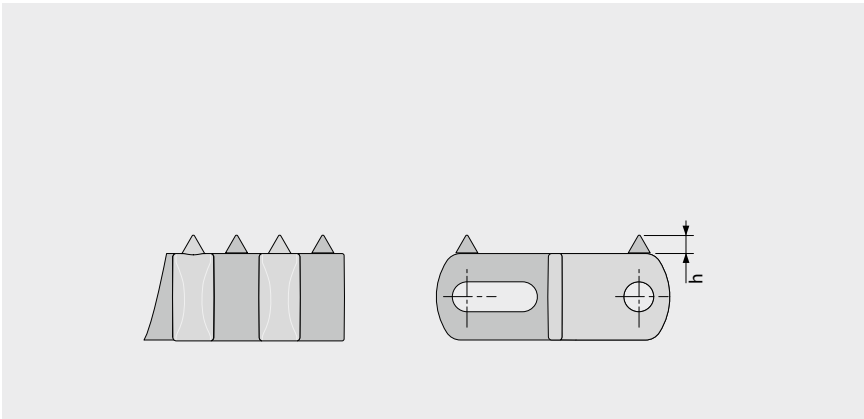


Basic data

Material	Color	Height (h)
		2.8 mm 0.11 inch
POM	BL	●

Molded width: 152 mm (6.0 in)

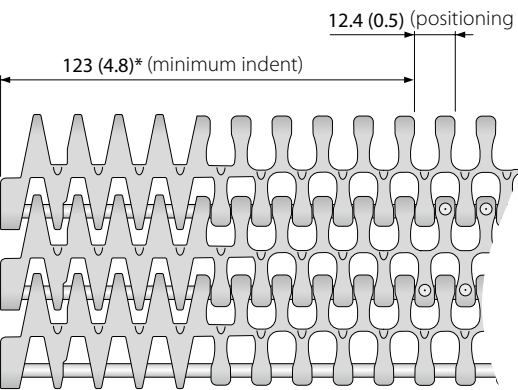

C_c 1.7

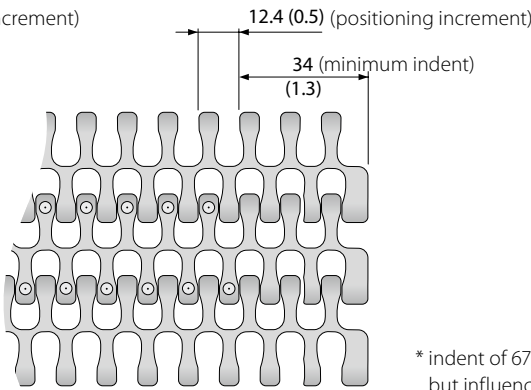

C_c 2.2

* indent of 67 mm (2.6 in) feasible, but influence to C_c possible

■ BL (Blue)

All measurements and tolerances apply at 21 °C; for temperature deviations please see Prolink manual chapter 4.4 "Temperature influence".
All imperial dimensions (inches) are rounded off.
Note: Use of accessory in a belt may impact on the minimum design radii. Please see chapter 6.3 for further information.



MOVEMENT SYSTEMS